




1  
G-1 Photo of Existing House: View from Marais Street.  
Scale: 1/8" = 1'-0"

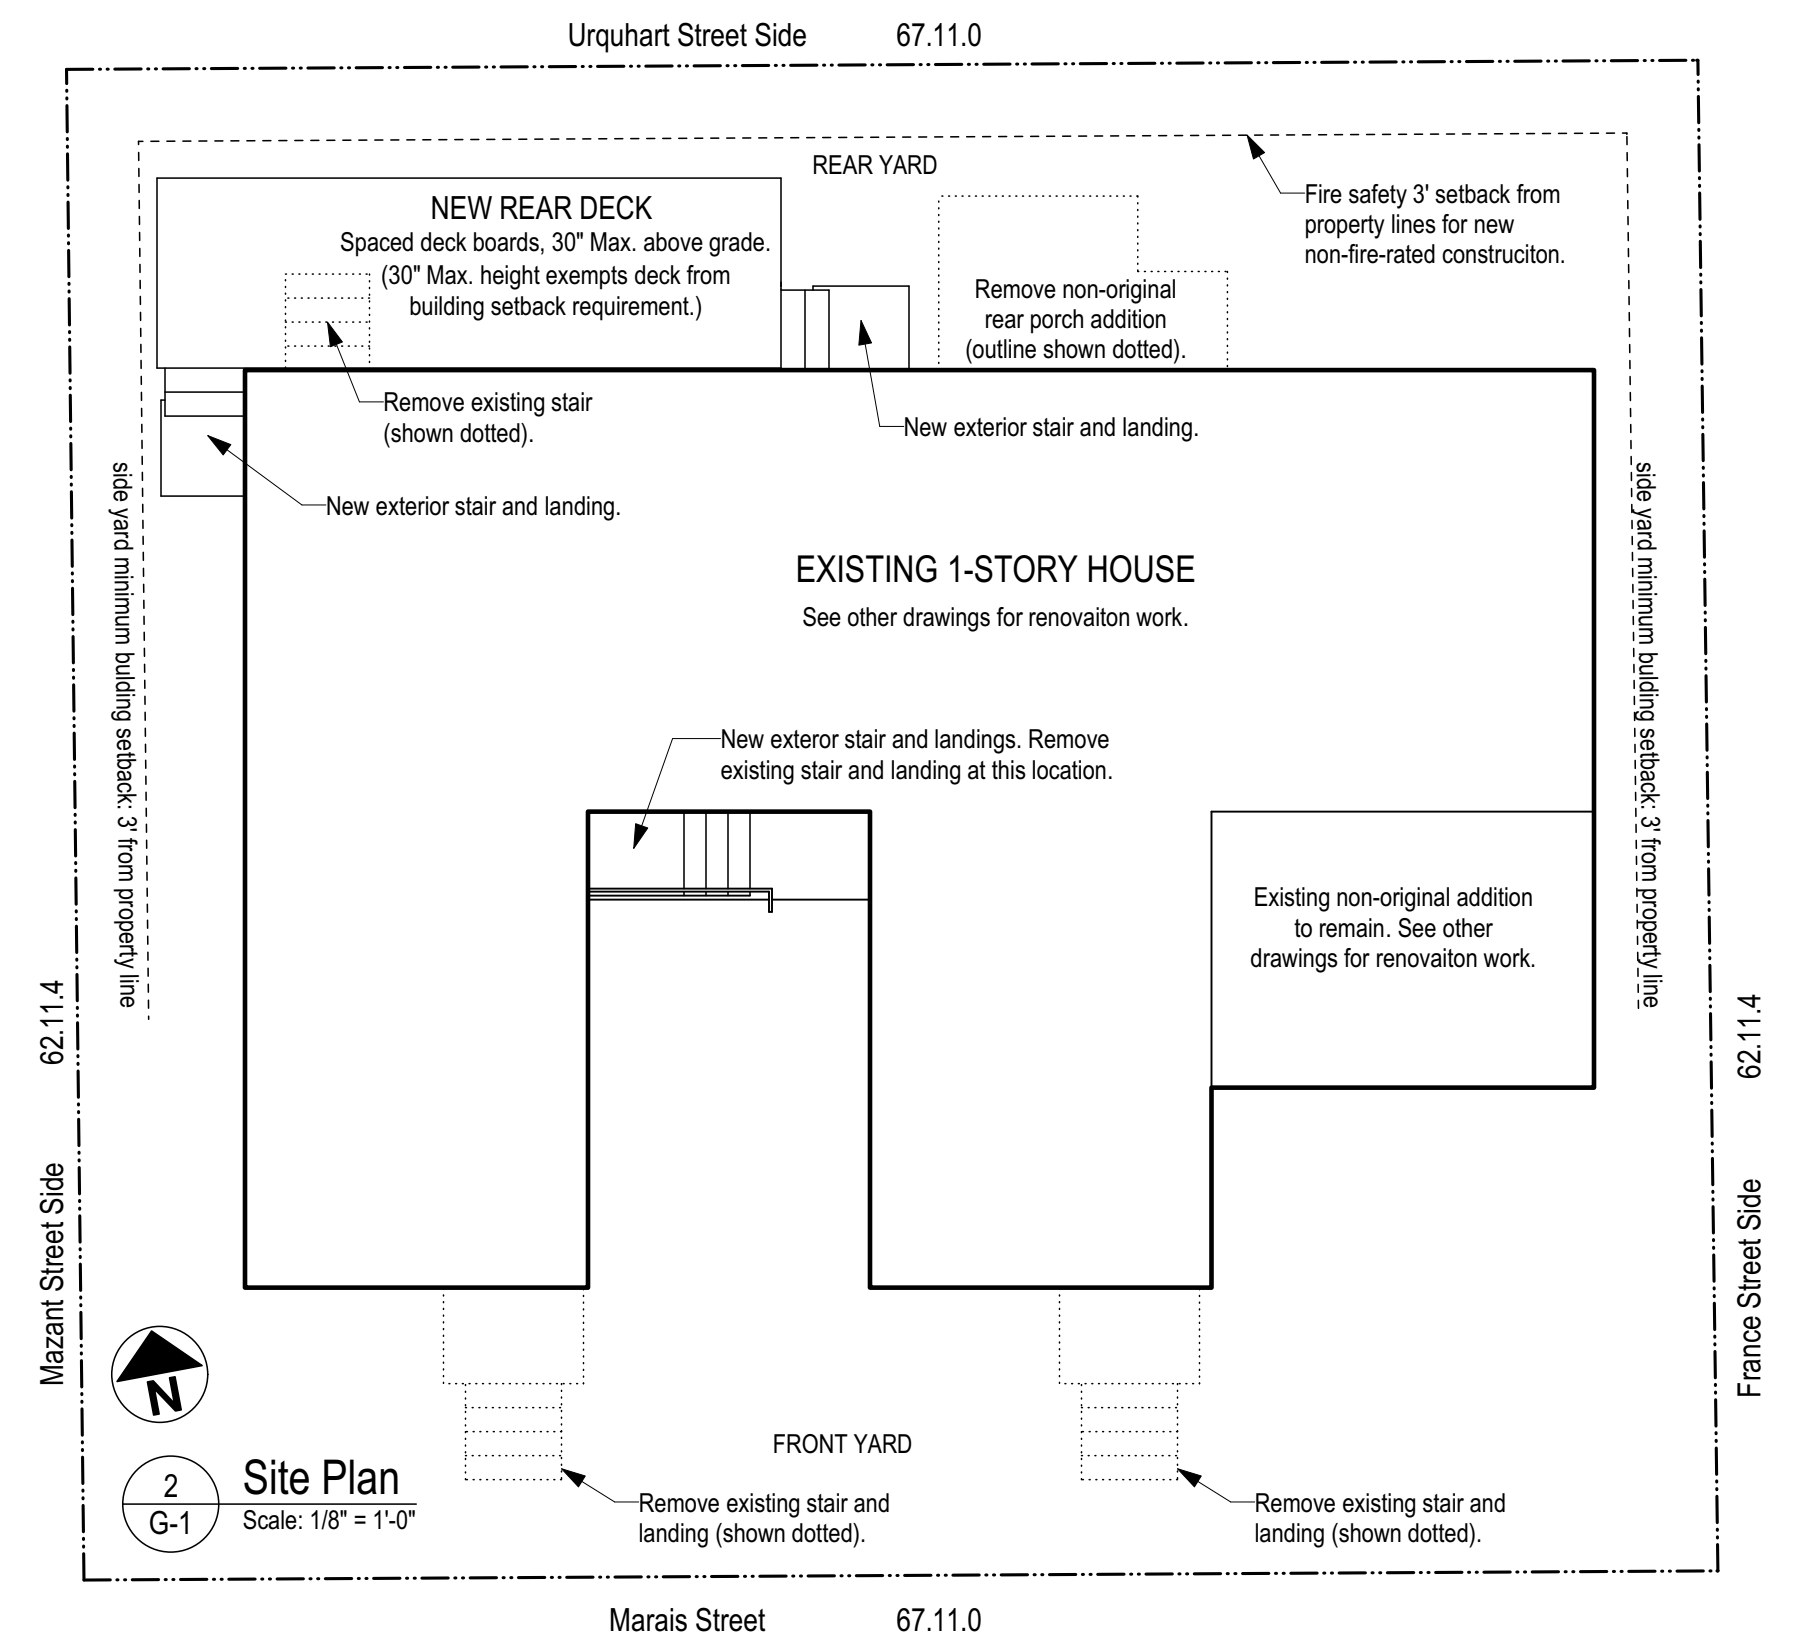

2  
G-1 Site Plan  
Scale: 1/8" = 1'-0"

Construction Pricing Notes	Abbreviations																																																																																																																																																																																																																																																																																																																																				
(reserved for Itemized Allowances, Etc.)	<table border="0"> <tr> <td>Abv.</td><td>ABOVE</td> <td>GFI</td><td>GROUND FAULT CIRCUIT INTERRUPTER</td> <td>SBO</td><td>SUPPLIED BY OWNER, INSTALLED BY CONTRACTOR</td> </tr> <tr> <td>A/C</td><td>AIR CONDITIONING</td> <td>GFCI</td><td>GROUND FAULT CIRCUIT INTERRUPTER</td> <td>SBC</td><td>SUPPLIED BY CONTRACTOR per schedule, INSTALLED BY CONTRACTOR</td> </tr> <tr> <td>ADA</td><td>AMERICANS WITH DISABILITIES ACT</td> <td>Gyp.</td><td>GYPSUM</td> <td>Sec.</td><td>SECTION</td> </tr> <tr> <td>AFF</td><td>ABOVE FINISHED FLOOR</td> <td>HB</td><td>HOSE BIB</td> <td>SEER</td><td>SEASONAL ENERGY EFFICIENCY RATIO</td> </tr> <tr> <td>AHU</td><td>AIR HANDLING UNIT</td> <td>HC</td><td>HOLLOW CORE</td> <td>Sht.</td><td>SHEET</td> </tr> <tr> <td>Alum.</td><td>ALUMINUM</td> <td>HdLC</td><td>HISTORIC DISTRICT LANDMARKS COMMISSION</td> <td>Sim.</td><td>SIMILAR</td> </tr> <tr> <td>Approx.</td><td>APPROXIMATE (LY)</td> <td>Ht.</td><td>HEIGHT</td> <td>Sl.</td><td>SLOPE</td> </tr> <tr> <td>Apt.</td><td>APARTMENT</td> <td>HVAC</td><td>HEATING/VENTILATING/AIR CONDITIONING</td> <td>SC</td><td>SOLID CORE</td> </tr> <tr> <td>Arch.</td><td>ARCHITECT (URAL)</td> <td>IBC</td><td>INTERNATIONAL BUILDING CODE, 2006 EDITION</td> <td>Spec.</td><td>SPECIFICATION, SPECIFIED</td> </tr> <tr> <td>ASF</td><td>ABOVE SUB-FLOOR</td> <td>ID</td><td>INNER DIAMETER</td> <td>Sq.</td><td>SQUARE</td> </tr> <tr> <td>A.T.</td><td>ALUMINUM THRESHOLD</td> <td>IFB</td><td>INVITATION FOR BIDS</td> <td>SS</td><td>STAINLESS STEEL</td> </tr> <tr> <td>AVA</td><td>AUDIO/VISUAL ACCESSIBLE</td> <td>In.</td><td>INCHES</td> <td>Std.</td><td>STANDARD</td> </tr> <tr> <td>Bd.</td><td>BOARD</td> <td>insul.</td><td>INSULATION, INSULATING</td> <td>Stl.</td><td>STEEL</td> </tr> <tr> <td>BdFt</td><td>BOARD FEET (OR BOARD FOOT)</td> <td>Int.</td><td>INTERIOR</td> <td>SV</td><td>FISCHER SENIOR VILLAGE SERVICE</td> </tr> <tr> <td>BFE</td><td>BASE FLOOD ELEVATION</td> <td>IBC</td><td>INTERNATIONAL BUILDING CODE</td> <td>TBD</td><td>TO BE DETERMINED</td> </tr> <tr> <td>Bldg.</td><td>BUILDING</td> <td>IRC</td><td>INTERNATIONAL RESIDENTIAL CODE</td> <td>TeL.</td><td>TELEPHONE</td> </tr> <tr> <td>Blk.</td><td>BLOCK (ING)</td> <td>J-BOX</td><td>JUNCTION BOX</td> <td>T&amp;G</td><td>TONGUE AND GROOVE</td> </tr> <tr> <td>Bm.</td><td>BEAM</td> <td>Lav.</td><td>LAVATORY</td> <td>Thk.</td><td>THICK (NESS)</td> </tr> <tr> <td>Btm.</td><td>BOTTOM</td> <td>Lb.</td><td>POUND (S)</td> <td>TV</td><td>TELEVISION</td> </tr> <tr> <td>Btwn.</td><td>BETWEEN</td> <td>LEED</td><td>LEADERSHIP IN ENERGY &amp; ENVIRONMENTAL DESIGN</td> <td>Typ.</td><td>TYPICAL</td> </tr> <tr> <td>Cab.</td><td>CABINET</td> <td>M</td><td>MECHANICAL DRAWINGS AND SPECIFICATIONS</td> <td>VCT</td><td>VINYL COMPOSITION TILE</td> </tr> <tr> <td>Cem.</td><td>CEMENT</td> <td>Max.</td><td>MAXIMUM</td> <td>Vert.</td><td>VERTICAL</td> </tr> <tr> <td>CJ</td><td>CONTROL JOINT</td> <td>MECH</td><td>MECHANICAL</td> <td>VIF</td><td>VERIFY IN FIELD</td> </tr> <tr> <td>CL</td><td>CENTERLINE</td> <td>MEP</td><td>MECHANICAL/ELECTRICAL/PLUMBING</td> <td>W</td><td>WASHING MACHINE</td> </tr> <tr> <td>Clg.</td><td>CEILING</td> <td>MH</td><td>MOUNTING HEIGHT</td> <td>WA</td><td>WHEELCHAIR ACCESSIBLE</td> </tr> <tr> <td>CMU</td><td>CONCRETE MASONRY UNIT</td> <td>Min.</td><td>MINIMUM</td> <td>W/</td><td>WITH</td> </tr> <tr> <td>Col.</td><td>COLUMN</td> <td>Misc.</td><td>MISCELLANEOUS</td> <td>Wd.</td><td>WOOD</td> </tr> <tr> <td>Conc.</td><td>CONCRETE</td> <td>MO</td><td>MASONRY OPENING</td> <td>Wdw.</td><td>WINDOW</td> </tr> <tr> <td>Cont.</td><td>CONTINUOUS</td> <td>MPE</td><td>MECHANICAL/PLUMBING/ELECTRICAL</td> <td>WH</td><td>WATER HEATER</td> </tr> <tr> <td>Cu Yds</td><td>CUBIC YARDS</td> <td>MR</td><td>MOISTURE RESISTANT</td> <td>W/O</td><td>WITHOUT</td> </tr> <tr> <td>D</td><td>DRYER</td> <td>M.T.</td><td>MARBLE THRESHOLD</td> <td>WP</td><td>WATERPROOF</td> </tr> <tr> <td>Dbl.</td><td>DOUBLE</td> <td>MtL.</td><td>METAL</td> <td>WWM</td><td>WELDED WIRE MESH (AKA: WELDED WIRE FABRIC)</td> </tr> <tr> <td>Demo.</td><td>DEMOLISH, DEMOLITION</td> <td>NIC</td><td>NOT IN CONTRACT</td> <td>Yr.</td><td>YEAR (S)</td> </tr> <tr> <td>Diag.</td><td>DIAGONAL</td> <td>NFPA</td><td>NFPA CODES, 2006 EDITIONS</td> <td></td><td></td> </tr> <tr> <td>Dim.</td><td>DIMENSION</td> <td>NTS</td><td>NOT TO SCALE</td> <td></td><td></td> </tr> <tr> <td>DN</td><td>DOWN</td> <td>OC</td><td>ON CENTER (S)</td> <td></td><td></td> </tr> <tr> <td>Dr.</td><td>DOOR</td> <td>OD</td><td>OUTER DIAMETER</td> <td></td><td></td> </tr> <tr> <td>DS</td><td>DOWNSPOUT</td> <td>P</td><td>PLUMBING DRAWINGS AND SPECIFICATIONS</td> <td></td><td></td> </tr> <tr> <td>Dtl.</td><td>DETAIL</td> <td>Plywd.</td><td>PLYWOOD</td> <td></td><td></td> </tr> <tr> <td>DW</td><td>DISHWASHER</td> <td>PSI</td><td>POUNDS PER SQUARE INCH</td> <td></td><td></td> </tr> <tr> <td>DWG</td><td>DRAWING</td> <td>PT</td><td>PRESERVATIVE TREATED</td> <td></td><td></td> </tr> <tr> <td>E</td><td>ELECTRICAL DRAWINGS AND SPECIFICATIONS</td> <td>Ptd.</td><td>PAINTED</td> <td></td><td></td> </tr> <tr> <td>EIFS</td><td>EXTERIOR INSULATING FINISH SYSTEM</td> <td>PVC</td><td>POLYVINYL CHLORIDE</td> <td></td><td></td> </tr> <tr> <td>EJ</td><td>EXPANSION JOINT</td> <td>R/A</td><td>RETURN AIR</td> <td></td><td></td> </tr> <tr> <td>Elec.</td><td>ELECTRIC(AL)</td> <td>Ref.</td><td>REFRIGERATOR</td> <td></td><td></td> </tr> <tr> <td>Elev.</td><td>ELEVATION</td> <td>Rehab.</td><td>REHABILITATION</td> <td></td><td></td> </tr> <tr> <td>EQ</td><td>EQUAL</td> <td>REHAB</td><td>REHABILITATION</td> <td></td><td></td> </tr> <tr> <td>Exist.</td><td>EXISTING</td> <td>Reqd</td><td>REQUIRED</td> <td></td><td></td> </tr> <tr> <td>Ext.</td><td>EXTERIOR</td> <td>RH</td><td>ROUGH HEAD (ROUGH HEADER)</td> <td></td><td></td> </tr> <tr> <td>FE</td><td>FIRE EXTINGUISHER</td> <td>RJ</td><td>ROUGH JAMB</td> <td></td><td></td> </tr> <tr> <td>FJ</td><td>FINGER-JOINED PINE OR FIR</td> <td>RM</td><td>ROOM</td> <td></td><td></td> </tr> <tr> <td>Ft.</td><td>FOOT (FEET)</td> <td>RO</td><td>ROUGH OPENING</td> <td></td><td></td> </tr> <tr> <td>Galv.</td><td>GALVANIZED</td> <td></td><td></td> <td></td><td></td> </tr> <tr> <td>GE-</td><td>GENERAL NOTE FOR EXTERIOR WORK</td> <td></td><td></td> <td></td><td></td> </tr> </table>	Abv.	ABOVE	GFI	GROUND FAULT CIRCUIT INTERRUPTER	SBO	SUPPLIED BY OWNER, INSTALLED BY CONTRACTOR	A/C	AIR CONDITIONING	GFCI	GROUND FAULT CIRCUIT INTERRUPTER	SBC	SUPPLIED BY CONTRACTOR per schedule, INSTALLED BY CONTRACTOR	ADA	AMERICANS WITH DISABILITIES ACT	Gyp.	GYPSUM	Sec.	SECTION	AFF	ABOVE FINISHED FLOOR	HB	HOSE BIB	SEER	SEASONAL ENERGY EFFICIENCY RATIO	AHU	AIR HANDLING UNIT	HC	HOLLOW CORE	Sht.	SHEET	Alum.	ALUMINUM	HdLC	HISTORIC DISTRICT LANDMARKS COMMISSION	Sim.	SIMILAR	Approx.	APPROXIMATE (LY)	Ht.	HEIGHT	Sl.	SLOPE	Apt.	APARTMENT	HVAC	HEATING/VENTILATING/AIR CONDITIONING	SC	SOLID CORE	Arch.	ARCHITECT (URAL)	IBC	INTERNATIONAL BUILDING CODE, 2006 EDITION	Spec.	SPECIFICATION, SPECIFIED	ASF	ABOVE SUB-FLOOR	ID	INNER DIAMETER	Sq.	SQUARE	A.T.	ALUMINUM THRESHOLD	IFB	INVITATION FOR BIDS	SS	STAINLESS STEEL	AVA	AUDIO/VISUAL ACCESSIBLE	In.	INCHES	Std.	STANDARD	Bd.	BOARD	insul.	INSULATION, INSULATING	Stl.	STEEL	BdFt	BOARD FEET (OR BOARD FOOT)	Int.	INTERIOR	SV	FISCHER SENIOR VILLAGE SERVICE	BFE	BASE FLOOD ELEVATION	IBC	INTERNATIONAL BUILDING CODE	TBD	TO BE DETERMINED	Bldg.	BUILDING	IRC	INTERNATIONAL RESIDENTIAL CODE	TeL.	TELEPHONE	Blk.	BLOCK (ING)	J-BOX	JUNCTION BOX	T&G	TONGUE AND GROOVE	Bm.	BEAM	Lav.	LAVATORY	Thk.	THICK (NESS)	Btm.	BOTTOM	Lb.	POUND (S)	TV	TELEVISION	Btwn.	BETWEEN	LEED	LEADERSHIP IN ENERGY & ENVIRONMENTAL DESIGN	Typ.	TYPICAL	Cab.	CABINET	M	MECHANICAL DRAWINGS AND SPECIFICATIONS	VCT	VINYL COMPOSITION TILE	Cem.	CEMENT	Max.	MAXIMUM	Vert.	VERTICAL	CJ	CONTROL JOINT	MECH	MECHANICAL	VIF	VERIFY IN FIELD	CL	CENTERLINE	MEP	MECHANICAL/ELECTRICAL/PLUMBING	W	WASHING MACHINE	Clg.	CEILING	MH	MOUNTING HEIGHT	WA	WHEELCHAIR ACCESSIBLE	CMU	CONCRETE MASONRY UNIT	Min.	MINIMUM	W/	WITH	Col.	COLUMN	Misc.	MISCELLANEOUS	Wd.	WOOD	Conc.	CONCRETE	MO	MASONRY OPENING	Wdw.	WINDOW	Cont.	CONTINUOUS	MPE	MECHANICAL/PLUMBING/ELECTRICAL	WH	WATER HEATER	Cu Yds	CUBIC YARDS	MR	MOISTURE RESISTANT	W/O	WITHOUT	D	DRYER	M.T.	MARBLE THRESHOLD	WP	WATERPROOF	Dbl.	DOUBLE	MtL.	METAL	WWM	WELDED WIRE MESH (AKA: WELDED WIRE FABRIC)	Demo.	DEMOLISH, DEMOLITION	NIC	NOT IN CONTRACT	Yr.	YEAR (S)	Diag.	DIAGONAL	NFPA	NFPA CODES, 2006 EDITIONS			Dim.	DIMENSION	NTS	NOT TO SCALE			DN	DOWN	OC	ON CENTER (S)			Dr.	DOOR	OD	OUTER DIAMETER			DS	DOWNSPOUT	P	PLUMBING DRAWINGS AND SPECIFICATIONS			Dtl.	DETAIL	Plywd.	PLYWOOD			DW	DISHWASHER	PSI	POUNDS PER SQUARE INCH			DWG	DRAWING	PT	PRESERVATIVE TREATED			E	ELECTRICAL DRAWINGS AND SPECIFICATIONS	Ptd.	PAINTED			EIFS	EXTERIOR INSULATING FINISH SYSTEM	PVC	POLYVINYL CHLORIDE			EJ	EXPANSION JOINT	R/A	RETURN AIR			Elec.	ELECTRIC(AL)	Ref.	REFRIGERATOR			Elev.	ELEVATION	Rehab.	REHABILITATION			EQ	EQUAL	REHAB	REHABILITATION			Exist.	EXISTING	Reqd	REQUIRED			Ext.	EXTERIOR	RH	ROUGH HEAD (ROUGH HEADER)			FE	FIRE EXTINGUISHER	RJ	ROUGH JAMB			FJ	FINGER-JOINED PINE OR FIR	RM	ROOM			Ft.	FOOT (FEET)	RO	ROUGH OPENING			Galv.	GALVANIZED					GE-	GENERAL NOTE FOR EXTERIOR WORK				
Abv.	ABOVE	GFI	GROUND FAULT CIRCUIT INTERRUPTER	SBO	SUPPLIED BY OWNER, INSTALLED BY CONTRACTOR																																																																																																																																																																																																																																																																																																																																
A/C	AIR CONDITIONING	GFCI	GROUND FAULT CIRCUIT INTERRUPTER	SBC	SUPPLIED BY CONTRACTOR per schedule, INSTALLED BY CONTRACTOR																																																																																																																																																																																																																																																																																																																																
ADA	AMERICANS WITH DISABILITIES ACT	Gyp.	GYPSUM	Sec.	SECTION																																																																																																																																																																																																																																																																																																																																
AFF	ABOVE FINISHED FLOOR	HB	HOSE BIB	SEER	SEASONAL ENERGY EFFICIENCY RATIO																																																																																																																																																																																																																																																																																																																																
AHU	AIR HANDLING UNIT	HC	HOLLOW CORE	Sht.	SHEET																																																																																																																																																																																																																																																																																																																																
Alum.	ALUMINUM	HdLC	HISTORIC DISTRICT LANDMARKS COMMISSION	Sim.	SIMILAR																																																																																																																																																																																																																																																																																																																																
Approx.	APPROXIMATE (LY)	Ht.	HEIGHT	Sl.	SLOPE																																																																																																																																																																																																																																																																																																																																
Apt.	APARTMENT	HVAC	HEATING/VENTILATING/AIR CONDITIONING	SC	SOLID CORE																																																																																																																																																																																																																																																																																																																																
Arch.	ARCHITECT (URAL)	IBC	INTERNATIONAL BUILDING CODE, 2006 EDITION	Spec.	SPECIFICATION, SPECIFIED																																																																																																																																																																																																																																																																																																																																
ASF	ABOVE SUB-FLOOR	ID	INNER DIAMETER	Sq.	SQUARE																																																																																																																																																																																																																																																																																																																																
A.T.	ALUMINUM THRESHOLD	IFB	INVITATION FOR BIDS	SS	STAINLESS STEEL																																																																																																																																																																																																																																																																																																																																
AVA	AUDIO/VISUAL ACCESSIBLE	In.	INCHES	Std.	STANDARD																																																																																																																																																																																																																																																																																																																																
Bd.	BOARD	insul.	INSULATION, INSULATING	Stl.	STEEL																																																																																																																																																																																																																																																																																																																																
BdFt	BOARD FEET (OR BOARD FOOT)	Int.	INTERIOR	SV	FISCHER SENIOR VILLAGE SERVICE																																																																																																																																																																																																																																																																																																																																
BFE	BASE FLOOD ELEVATION	IBC	INTERNATIONAL BUILDING CODE	TBD	TO BE DETERMINED																																																																																																																																																																																																																																																																																																																																
Bldg.	BUILDING	IRC	INTERNATIONAL RESIDENTIAL CODE	TeL.	TELEPHONE																																																																																																																																																																																																																																																																																																																																
Blk.	BLOCK (ING)	J-BOX	JUNCTION BOX	T&G	TONGUE AND GROOVE																																																																																																																																																																																																																																																																																																																																
Bm.	BEAM	Lav.	LAVATORY	Thk.	THICK (NESS)																																																																																																																																																																																																																																																																																																																																
Btm.	BOTTOM	Lb.	POUND (S)	TV	TELEVISION																																																																																																																																																																																																																																																																																																																																
Btwn.	BETWEEN	LEED	LEADERSHIP IN ENERGY & ENVIRONMENTAL DESIGN	Typ.	TYPICAL																																																																																																																																																																																																																																																																																																																																
Cab.	CABINET	M	MECHANICAL DRAWINGS AND SPECIFICATIONS	VCT	VINYL COMPOSITION TILE																																																																																																																																																																																																																																																																																																																																
Cem.	CEMENT	Max.	MAXIMUM	Vert.	VERTICAL																																																																																																																																																																																																																																																																																																																																
CJ	CONTROL JOINT	MECH	MECHANICAL	VIF	VERIFY IN FIELD																																																																																																																																																																																																																																																																																																																																
CL	CENTERLINE	MEP	MECHANICAL/ELECTRICAL/PLUMBING	W	WASHING MACHINE																																																																																																																																																																																																																																																																																																																																
Clg.	CEILING	MH	MOUNTING HEIGHT	WA	WHEELCHAIR ACCESSIBLE																																																																																																																																																																																																																																																																																																																																
CMU	CONCRETE MASONRY UNIT	Min.	MINIMUM	W/	WITH																																																																																																																																																																																																																																																																																																																																
Col.	COLUMN	Misc.	MISCELLANEOUS	Wd.	WOOD																																																																																																																																																																																																																																																																																																																																
Conc.	CONCRETE	MO	MASONRY OPENING	Wdw.	WINDOW																																																																																																																																																																																																																																																																																																																																
Cont.	CONTINUOUS	MPE	MECHANICAL/PLUMBING/ELECTRICAL	WH	WATER HEATER																																																																																																																																																																																																																																																																																																																																
Cu Yds	CUBIC YARDS	MR	MOISTURE RESISTANT	W/O	WITHOUT																																																																																																																																																																																																																																																																																																																																
D	DRYER	M.T.	MARBLE THRESHOLD	WP	WATERPROOF																																																																																																																																																																																																																																																																																																																																
Dbl.	DOUBLE	MtL.	METAL	WWM	WELDED WIRE MESH (AKA: WELDED WIRE FABRIC)																																																																																																																																																																																																																																																																																																																																
Demo.	DEMOLISH, DEMOLITION	NIC	NOT IN CONTRACT	Yr.	YEAR (S)																																																																																																																																																																																																																																																																																																																																
Diag.	DIAGONAL	NFPA	NFPA CODES, 2006 EDITIONS																																																																																																																																																																																																																																																																																																																																		
Dim.	DIMENSION	NTS	NOT TO SCALE																																																																																																																																																																																																																																																																																																																																		
DN	DOWN	OC	ON CENTER (S)																																																																																																																																																																																																																																																																																																																																		
Dr.	DOOR	OD	OUTER DIAMETER																																																																																																																																																																																																																																																																																																																																		
DS	DOWNSPOUT	P	PLUMBING DRAWINGS AND SPECIFICATIONS																																																																																																																																																																																																																																																																																																																																		
Dtl.	DETAIL	Plywd.	PLYWOOD																																																																																																																																																																																																																																																																																																																																		
DW	DISHWASHER	PSI	POUNDS PER SQUARE INCH																																																																																																																																																																																																																																																																																																																																		
DWG	DRAWING	PT	PRESERVATIVE TREATED																																																																																																																																																																																																																																																																																																																																		
E	ELECTRICAL DRAWINGS AND SPECIFICATIONS	Ptd.	PAINTED																																																																																																																																																																																																																																																																																																																																		
EIFS	EXTERIOR INSULATING FINISH SYSTEM	PVC	POLYVINYL CHLORIDE																																																																																																																																																																																																																																																																																																																																		
EJ	EXPANSION JOINT	R/A	RETURN AIR																																																																																																																																																																																																																																																																																																																																		
Elec.	ELECTRIC(AL)	Ref.	REFRIGERATOR																																																																																																																																																																																																																																																																																																																																		
Elev.	ELEVATION	Rehab.	REHABILITATION																																																																																																																																																																																																																																																																																																																																		
EQ	EQUAL	REHAB	REHABILITATION																																																																																																																																																																																																																																																																																																																																		
Exist.	EXISTING	Reqd	REQUIRED																																																																																																																																																																																																																																																																																																																																		
Ext.	EXTERIOR	RH	ROUGH HEAD (ROUGH HEADER)																																																																																																																																																																																																																																																																																																																																		
FE	FIRE EXTINGUISHER	RJ	ROUGH JAMB																																																																																																																																																																																																																																																																																																																																		
FJ	FINGER-JOINED PINE OR FIR	RM	ROOM																																																																																																																																																																																																																																																																																																																																		
Ft.	FOOT (FEET)	RO	ROUGH OPENING																																																																																																																																																																																																																																																																																																																																		
Galv.	GALVANIZED																																																																																																																																																																																																																																																																																																																																				
GE-	GENERAL NOTE FOR EXTERIOR WORK																																																																																																																																																																																																																																																																																																																																				

Painting Notes
<ol style="list-style-type: none"> <li>See General Note #14 on Sheet T1 regarding lead-based paint.</li> <li>All paint and primer products shall be Benjamin Moore or Sherwin Williams unless otherwise permitted in writing by the Architect. Specific products shall be selected and used according to the product labels for specific substrates.</li> <li>All interior paint products shall be labeled by the manufacturer as "low VOC", "no VOC", or "zero VOC" products.</li> <li>Paint all exposed interior wood (including engineered wood) and gypsum surfaces at walls, ceilings, doors, and windows, unless noted otherwise. 2 finish coats, minimum.</li> <li>Paint all exposed exterior wood (including engineered wood), fiber cement, and PVC surfaces unless noted otherwise. 2 finish coats, minimum.</li> <li>Paint all exposed ferrous metal surfaces unless noted otherwise. Remove all rust prior to painting. 2 finish coats, minimum.</li> <li>Paint colors and sheens shall be selected by the Architect from manufacturer's standard color offerings or Architect will provide color samples to match.</li> </ol>

Insulation Notes
<ol style="list-style-type: none"> <li>ATTIC: Insulation is existing. Inspect attic and provide a Change Order cost proposal for any recommended attic insulation improvements.</li> <li>EXTERIOR WALLS: Insulation is presumed to be existing. Report any observations of uninsulated exterior wall cavities to the Architect.</li> <li>INTERIOR WALLS: Provide unfaced mineral wool insulation at all new interior walls (for sound isolation), thickness as required to fill wall cavities.</li> <li>FLOOR: Spray foam insulation is existing under the floor. Patch insulation at areas of new work with new closed-cell spray foam insulation, R-9 minimum.</li> <li>Insulate water supply pipes, air ducts, refrigerant lines, and other MEP items as required to meet or exceed applicable Code requirements.</li> </ol>

Roofing Notes
<ol style="list-style-type: none"> <li>Re-roof pitched roof. Remove existing asphalt shingles and underlayment. Provide new self-adhering underlayment; GAF Storm Guard or as otherwise approved by the Architect. Provide new 30-year fiberglass-reinforced dimensional asphalt shingles as recommended by the shingle manufacturer for areas with a 130 mile-per-hour Basic Wind Speed. Provide 6 nails minimum per shingle.</li> <li>Re-roof low-slope roof. Remove existing roofing and underlayment. Provide new torch-down roof roofing with granular coating over new base ply.</li> <li>As part of the re-roofing process for pitched and low-slope roofs, inspect existing roof sheathing and report condition to Architect.</li> <li>For all metal flashings, metal gutters, metal downspouts, and any other sheet metal work; comply with the current edition of the Architectural Sheet Metal Manual published by the Sheet Metal and Air Conditioning Contractors' National Association, Inc. (SMACNA).</li> </ol>



Index of Drawings		
G-1	Site Plan, Abbreviations, Index of Drawings, Notes, Miscellaneous	City of New Orleans One Stop drawings submittal
A-1	Floor Plan, Foundation Plan, Rear Deck Framing Plan, Finish Schedule	
A-2	Mechanical/Plumbing/Electrical Plan	
A-3	Details	
A-4	Reserved for Kitchen Enlarged Plan & Interior Elevations,	future drawings, not required for building permit application
A-5	Reserved for Bathrooms Enlarged Plans & Interior Elevations,	
A-6	Reserved for Trim, Door Styles, Door Hardware, & Closet Build-Out	

PROJECT GENERAL NOTES	
1.	The Contractor shall verify all relevant dimensions and field conditions before proceeding and shall notify the Architect of any discrepancies between existing field conditions and how they are portrayed in these drawings. Contractor shall verify the fit of all proposed construction. All dimensions given for existing construction are approximate; they are not precise.
2.	The Contractor shall make a reasonable effort to prevent hazards & inconveniences to neighbors, residents, guests, and the general public. The Contractor shall make a reasonable effort to provide for the safety of persons on the public right of way and shall secure any necessary City permits for barricades, signs, covered walks or other safety features. Such safety features, as deemed to be reasonable, shall be within the Contractor's scope of work.
3.	The Contractor shall ensure that all workers are provided with reasonable gear and equipment for personal safety and that all workers on the site have had reasonable training in safety procedures. The Contractor shall ensure that all workers at the project site are covered with Workers' Compensation insurance.
4.	The Contractor shall provide reasonable protection to prevent damage to all new (and existing to remain) work, materials, equipment, and existing structures, finishes, plants, soil, grading, and furnishings. The Contractor shall also take reasonable precautions to protect adjacent City property and utilities. Any damaged items shall be replaced or repaired by the Contractor at no additional cost to the Owner.
5.	All materials, fixtures, etc. shall be new unless otherwise specified and shall be handled & installed according to all of the manufacturers' instructions & recommendations. Should the Contractor discover an apparent discrepancy between the manufacturer's instructions & recommendations and the Architect's instructions (including these documents), the Contractor shall bring the discrepancy to the Architect's attention.
6.	The work shall comply with all applicable codes & laws. Should the Contractor discover an apparent discrepancy between applicable codes & laws and the Architect's instructions (including these documents), the Contractor shall bring the discrepancy to the Architect's attention.
7.	The Contractor shall price and perform all work necessary to legally complete the work as described in this drawing set, whether or not such work is specifically called for in this drawing set. That is, all prerequisite work and incidental work shall be performed by the Contractor at no additional cost to the Owner.
8.	The Contractor shall provide security measures during construction as required to reasonably protect the project areas from vandals and theft.
9.	The Contractor shall promptly notify the Architect if any discrepancies within the Contract Documents are discovered.
10.	In these Drawing sheets, "See . . ." means "See and comply with . . .".
11.	The Contractor shall perform a final cleaning of the project area.
12.	In addition to other applicable quality standards, the Contractor shall comply with the quality standards published by the National Association of Home Builders (NAHB) in the current edition of its <i>Residential Construction Performance Guidelines</i> .
13.	Prior to any on-site work, the Contractor shall provide the Owner and the Architect with Certificates of Insurance, naming them as insured under the Contractor's insurance policy.
14.	The project area may contain materials regulated by the Louisiana Department of Environmental Quality and the EPA, including asbestos and lead-containing paint. Identification, handling, encapsulation, and disposal of such items in compliance with applicable regulations shall be the responsibility of the Contractor. The Contractor shall perform the Work in compliance with the Environmental Protection Agency's Renovation, Repair, and Painting (RRP) regulations and shall perform the Work only with an RRP Certification. A copy of the RRP Certification document(s) shall be kept on site during the work, and another copy shall be provided to the Architect prior to any on-site work. In the absence of definitive information to the contrary, it shall be assumed that existing paint on site includes lead above regulatory limits. The Contractor shall comply with all applicable government regulations, including Environmental Protection Agency (EPA) regulations and Louisiana Department of Environmental Quality (LA DEQ) regulations.



Project Information, Misc.
<p>PROPERTY DESCRIPTION: District 3, Square 471, Lot D</p> <p>ZONING DISTRICT: HU-RD2, Historic Urban Two-Family Residential District</p> <p>BOUNDING STREETS: Marais St., France St., Urquhart St. St, Mazant St.</p> <p>OCCUPANCY TYPE: One-Family dwelling (Existing and Proposed.)</p> <p>PRIMARY CONSTRUCTION TYPE: Light wood frame</p> <p>FOUNDATION TYPE: masonry piers on grade beams and spread footings</p> <p>NO. OF STORIES: 1 (Existing and Proposed.)</p> <p>GROSS INTERIOR FLOOR AREA: 1,783 SF (Existing and Proposed)</p>

Project Directory		
<p><b>OWNER:</b> Daniel Askin</p>	<p><b>ARCHITECT:</b> Michael Cajski &amp; Van Tran Volume Zero LLC 1034 Joliet St. New Orleans, LA 70118  office phone: (504) 864-9909 michael@volumezero.com van@volumezero.com</p>	<p><b>CONTRACTOR (PENDING AGREEMENT):</b>  to be determined</p>



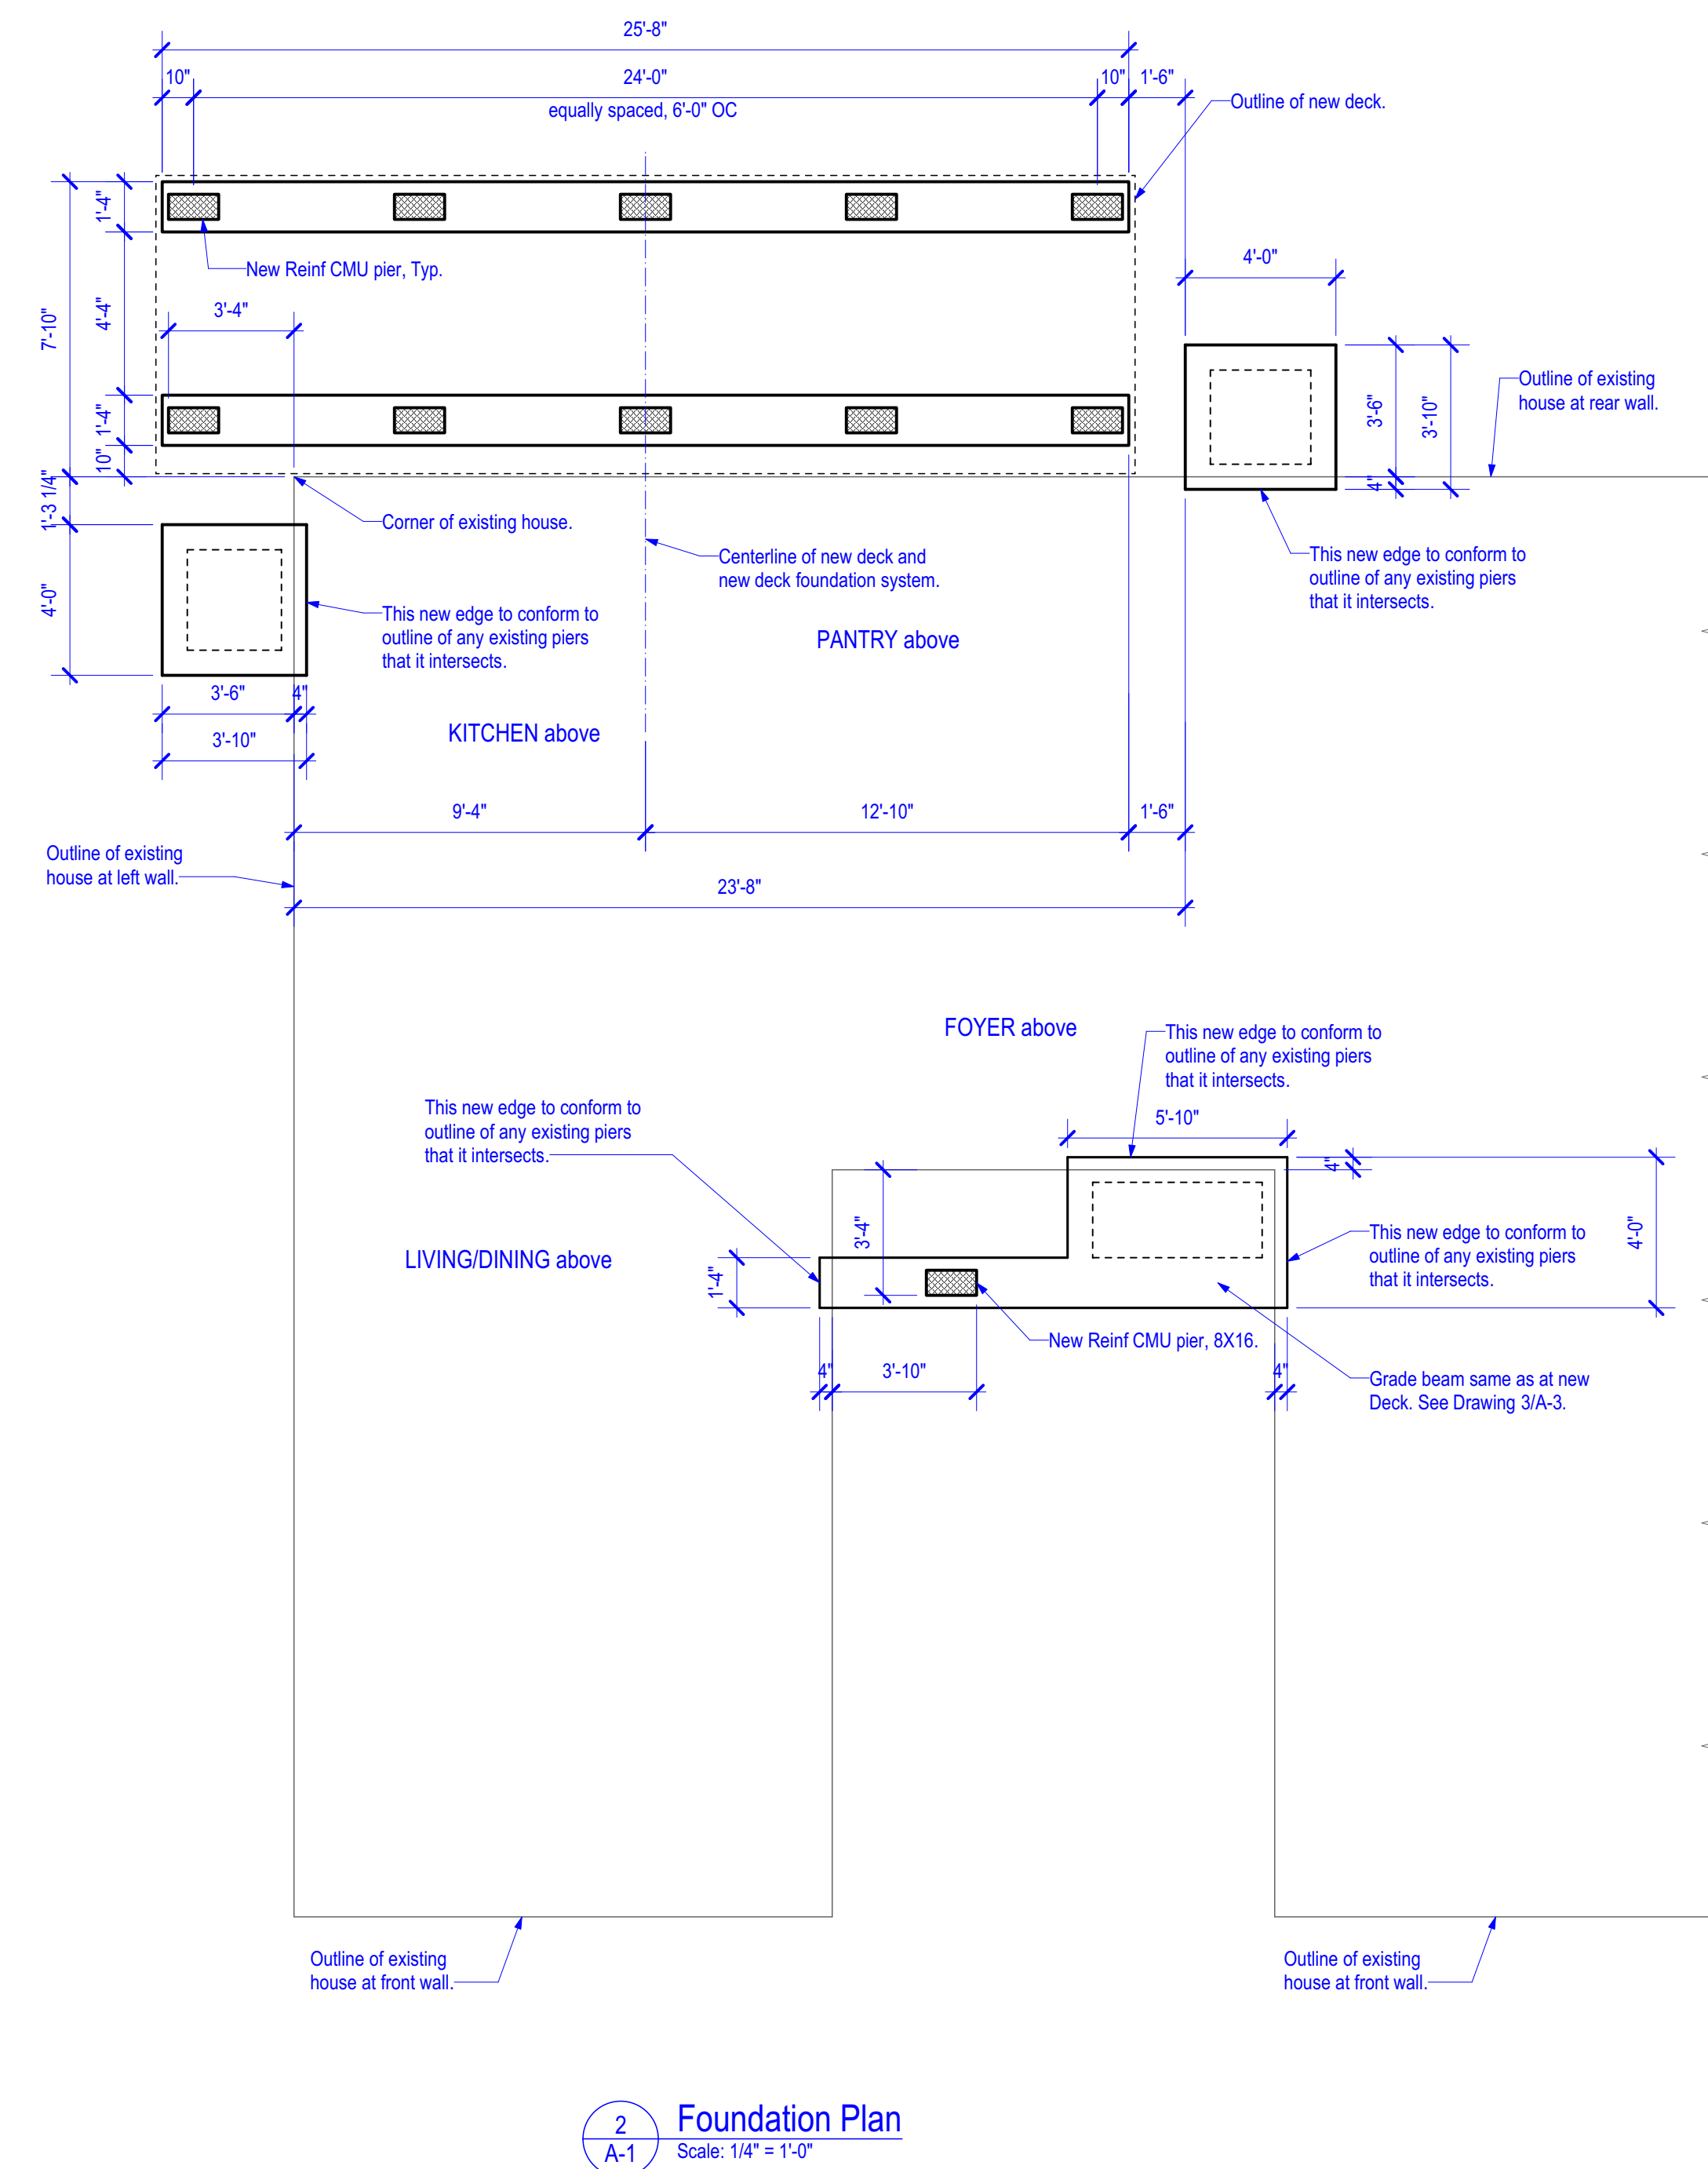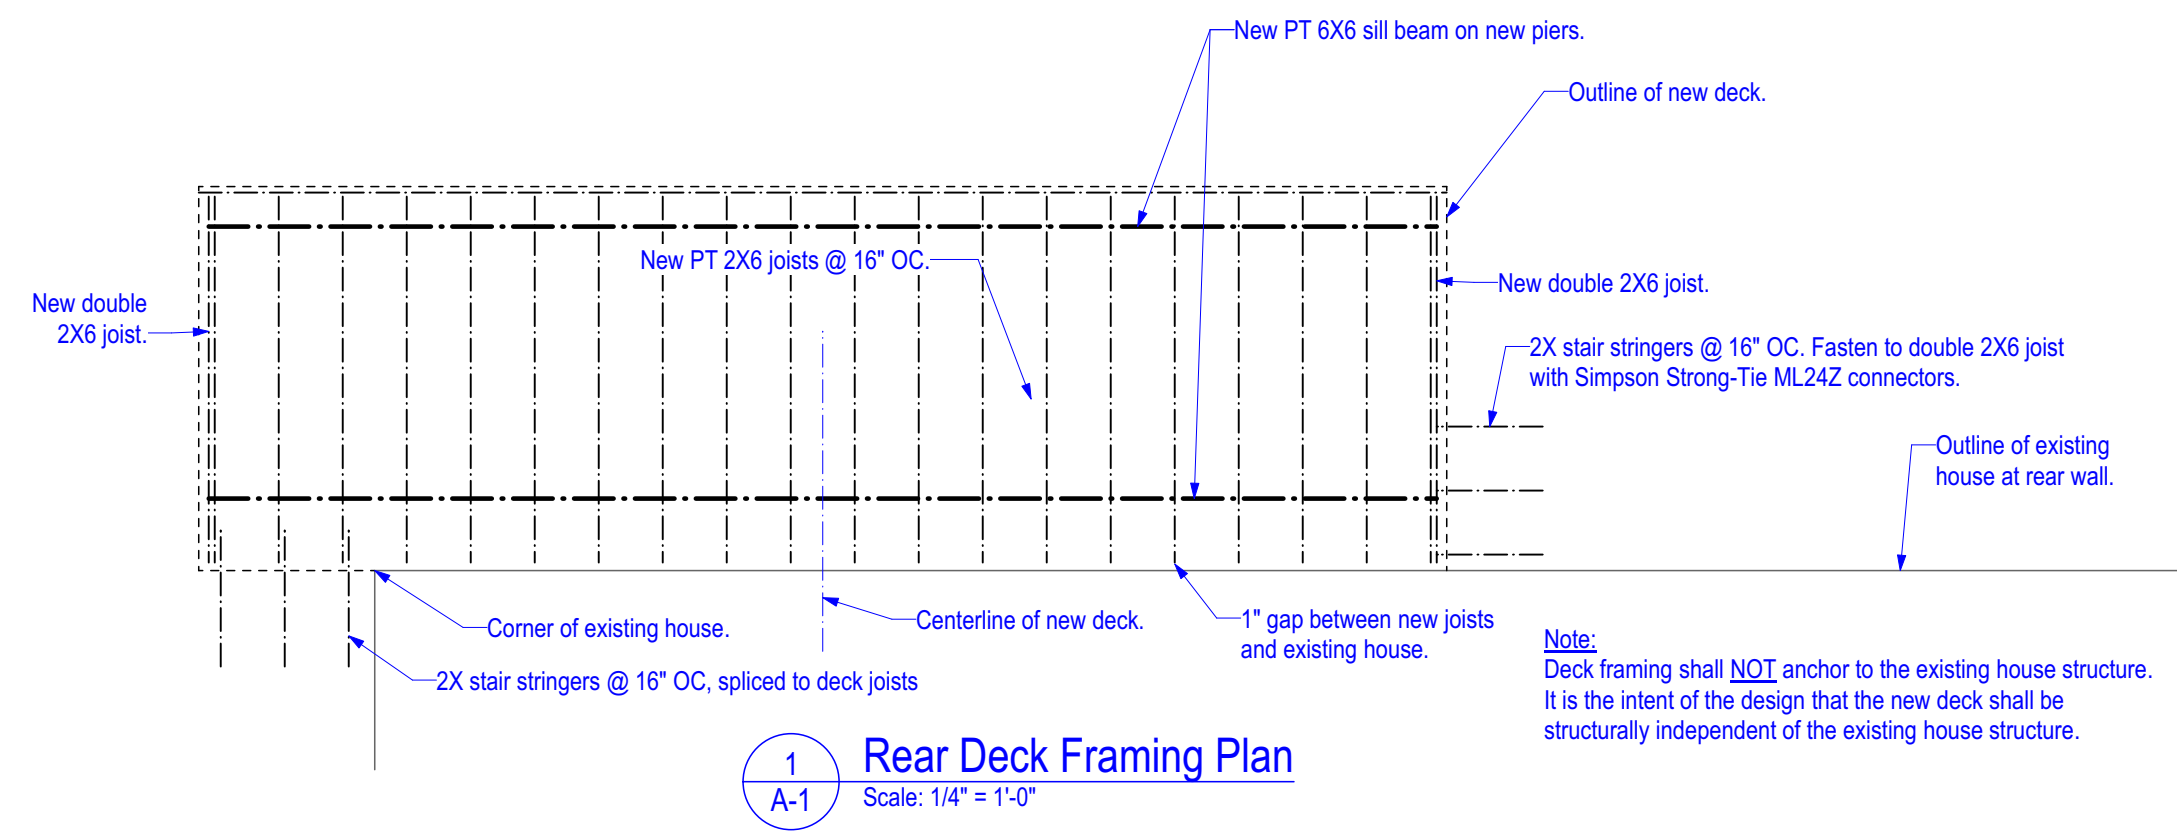


ROOM / AREA	FLOOR	WALLS	CEILING	MISC REMARKS
Master Bathroom, Bathroom 2, and Powder Room	New porcelain tile	5/8" Gypsum Bd. moisture-resistant	5/8" Gypsum Bd. moisture-resistant	
Laundry Closet	New T&G plank flooring, pre-finished	5/8" Gypsum Bd. moisture-resistant	5/8" Gypsum Bd. moisture-resistant	
all other rooms	New T&G plank flooring, pre-finished	5/8" Gypsum Bd.	5/8" Gypsum Bd.	

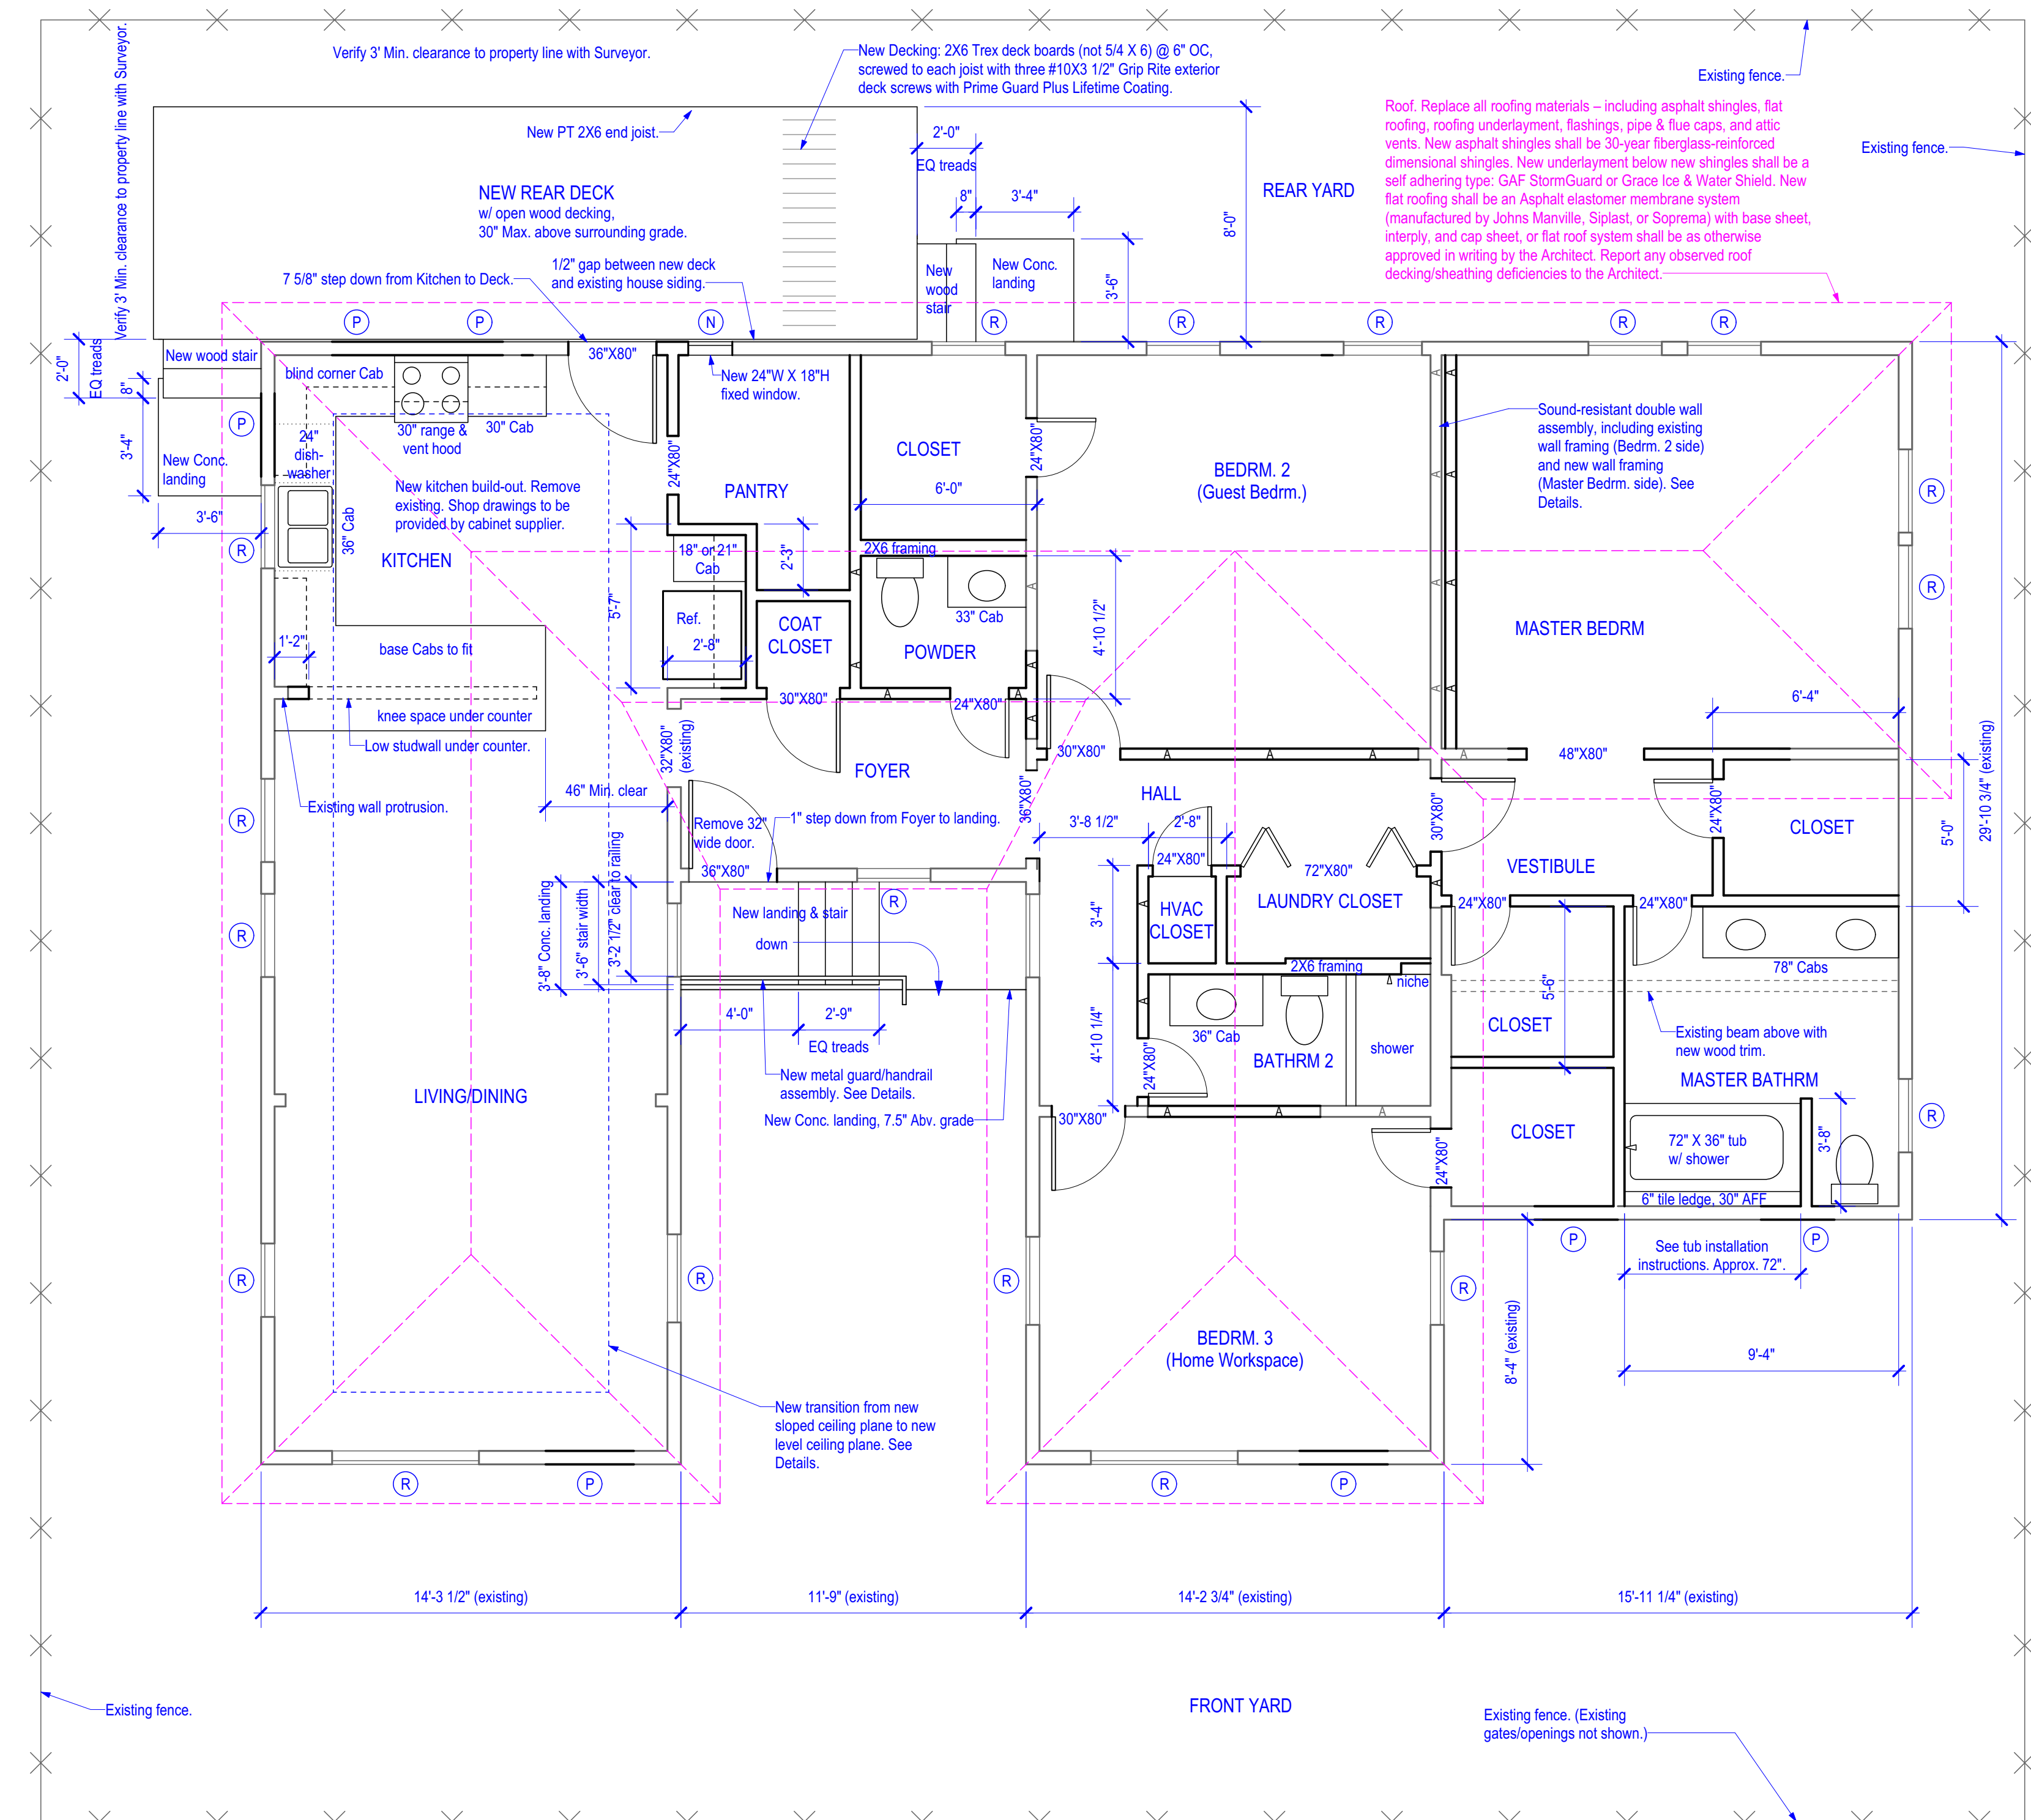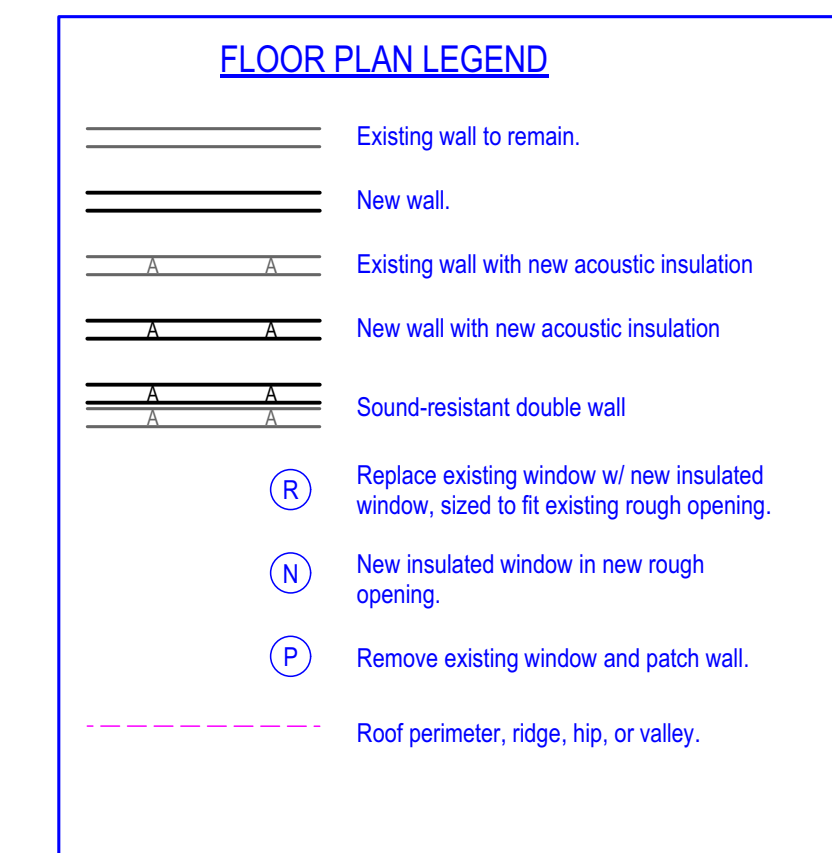

RENOVATIONS AND ADDITION  
**4123 & 4125 MARAIS STREET**  
New Orleans, Louisiana 70117

Issue and print dates:  
October 8, 2021: Initial Design Proposal. Preliminary, not for construction  
December 24, 2021: Preliminary, awaiting Survey Documents.  
January 7, 2022: Preliminary, awaiting Survey Documents.  
February 19, 2022: Building Permit Application

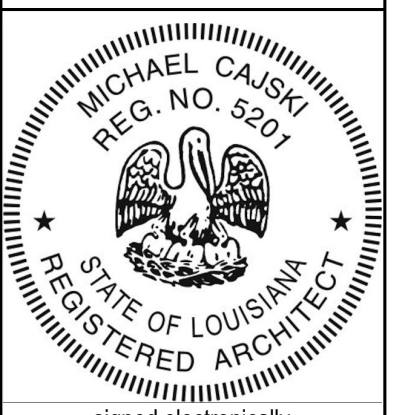

signed electronically  
Michael Cajski  
Registered Architect #5201  
February 19, 2022

RENOVATIONS AND ADDITION  
**4123 & 4125 MARAIS STREET**  
New Orleans, Louisiana 70117

Issue and print dates:  
October 8, 2021: Initial Design Proposal. Preliminary, not for construction  
December 24, 2021: Preliminary, awaiting Survey Documents.  
January 7, 2022: Preliminary, awaiting Survey Documents.  
February 19, 2022: Building Permit Application



signed electronically  
Michael Cajski  
Registered Architect #5201  
February 19, 2022



Vol. 0 project no. 21-013  
drawn by MC

sheet no.

**A-2**

**MECHANICAL & ELECTRICAL  
SYMBOL LEGEND**

- GRILLE, CEILING
- GRILLE, FLOOR
- GRILLE, WALL
- FIRE SPRINKLER, CEILING
- FIRE SPRINKLER, WALL
- THERMOSTAT
- SMOKE DETECTOR/ALARM, CEILING
- SMOKE DETECTOR/ALARM, WALL
- SPEAKER, CEILING
- SPEAKER, WALL
- ELEC. PANEL BOX
- ELEC. RECEPTACLE, SIMPLEX
- ELEC. RECEPTACLE, DUPLEX
- ELEC. RECEPTACLE, QUAD
- ELEC. SWITCH
- LIGHT FIXTURE, WALL SURFACE-MOUNTED
- LIGHT FIXTURE, CEILING SURFACE-MOUNTED
- LIGHT FIXTURE, RECESSED IN CEILING
- PHONE/DATA JACK
- COAXIAL CABLE JACK
- ACCESS PANEL
- SECURITY KEYPAD
- UNDERCABINET LIGHT STRIP
- HEATER/VENT/LIGHT/NIGHTLIGHT, RECESSED
- TWIN HEAD SECURITY LIGHT
- RECESSED LIGHT WITH ADJUSTABLE GIMBAL
- WATER HEATER, TANK TYPE
- CEILING FAN WITH LIGHT KIT




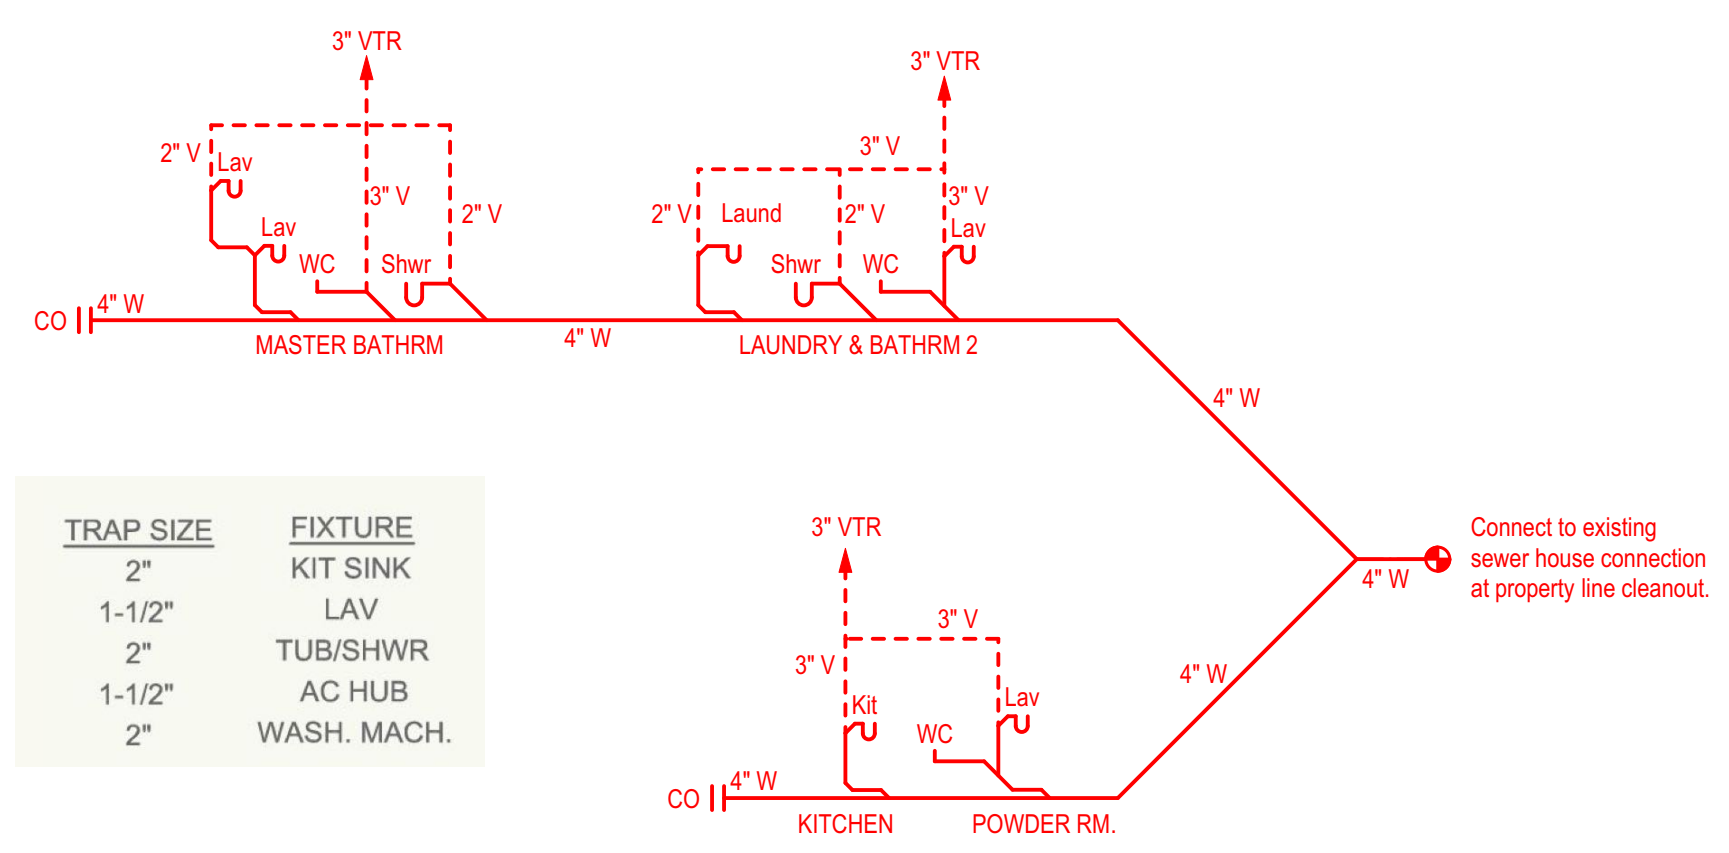
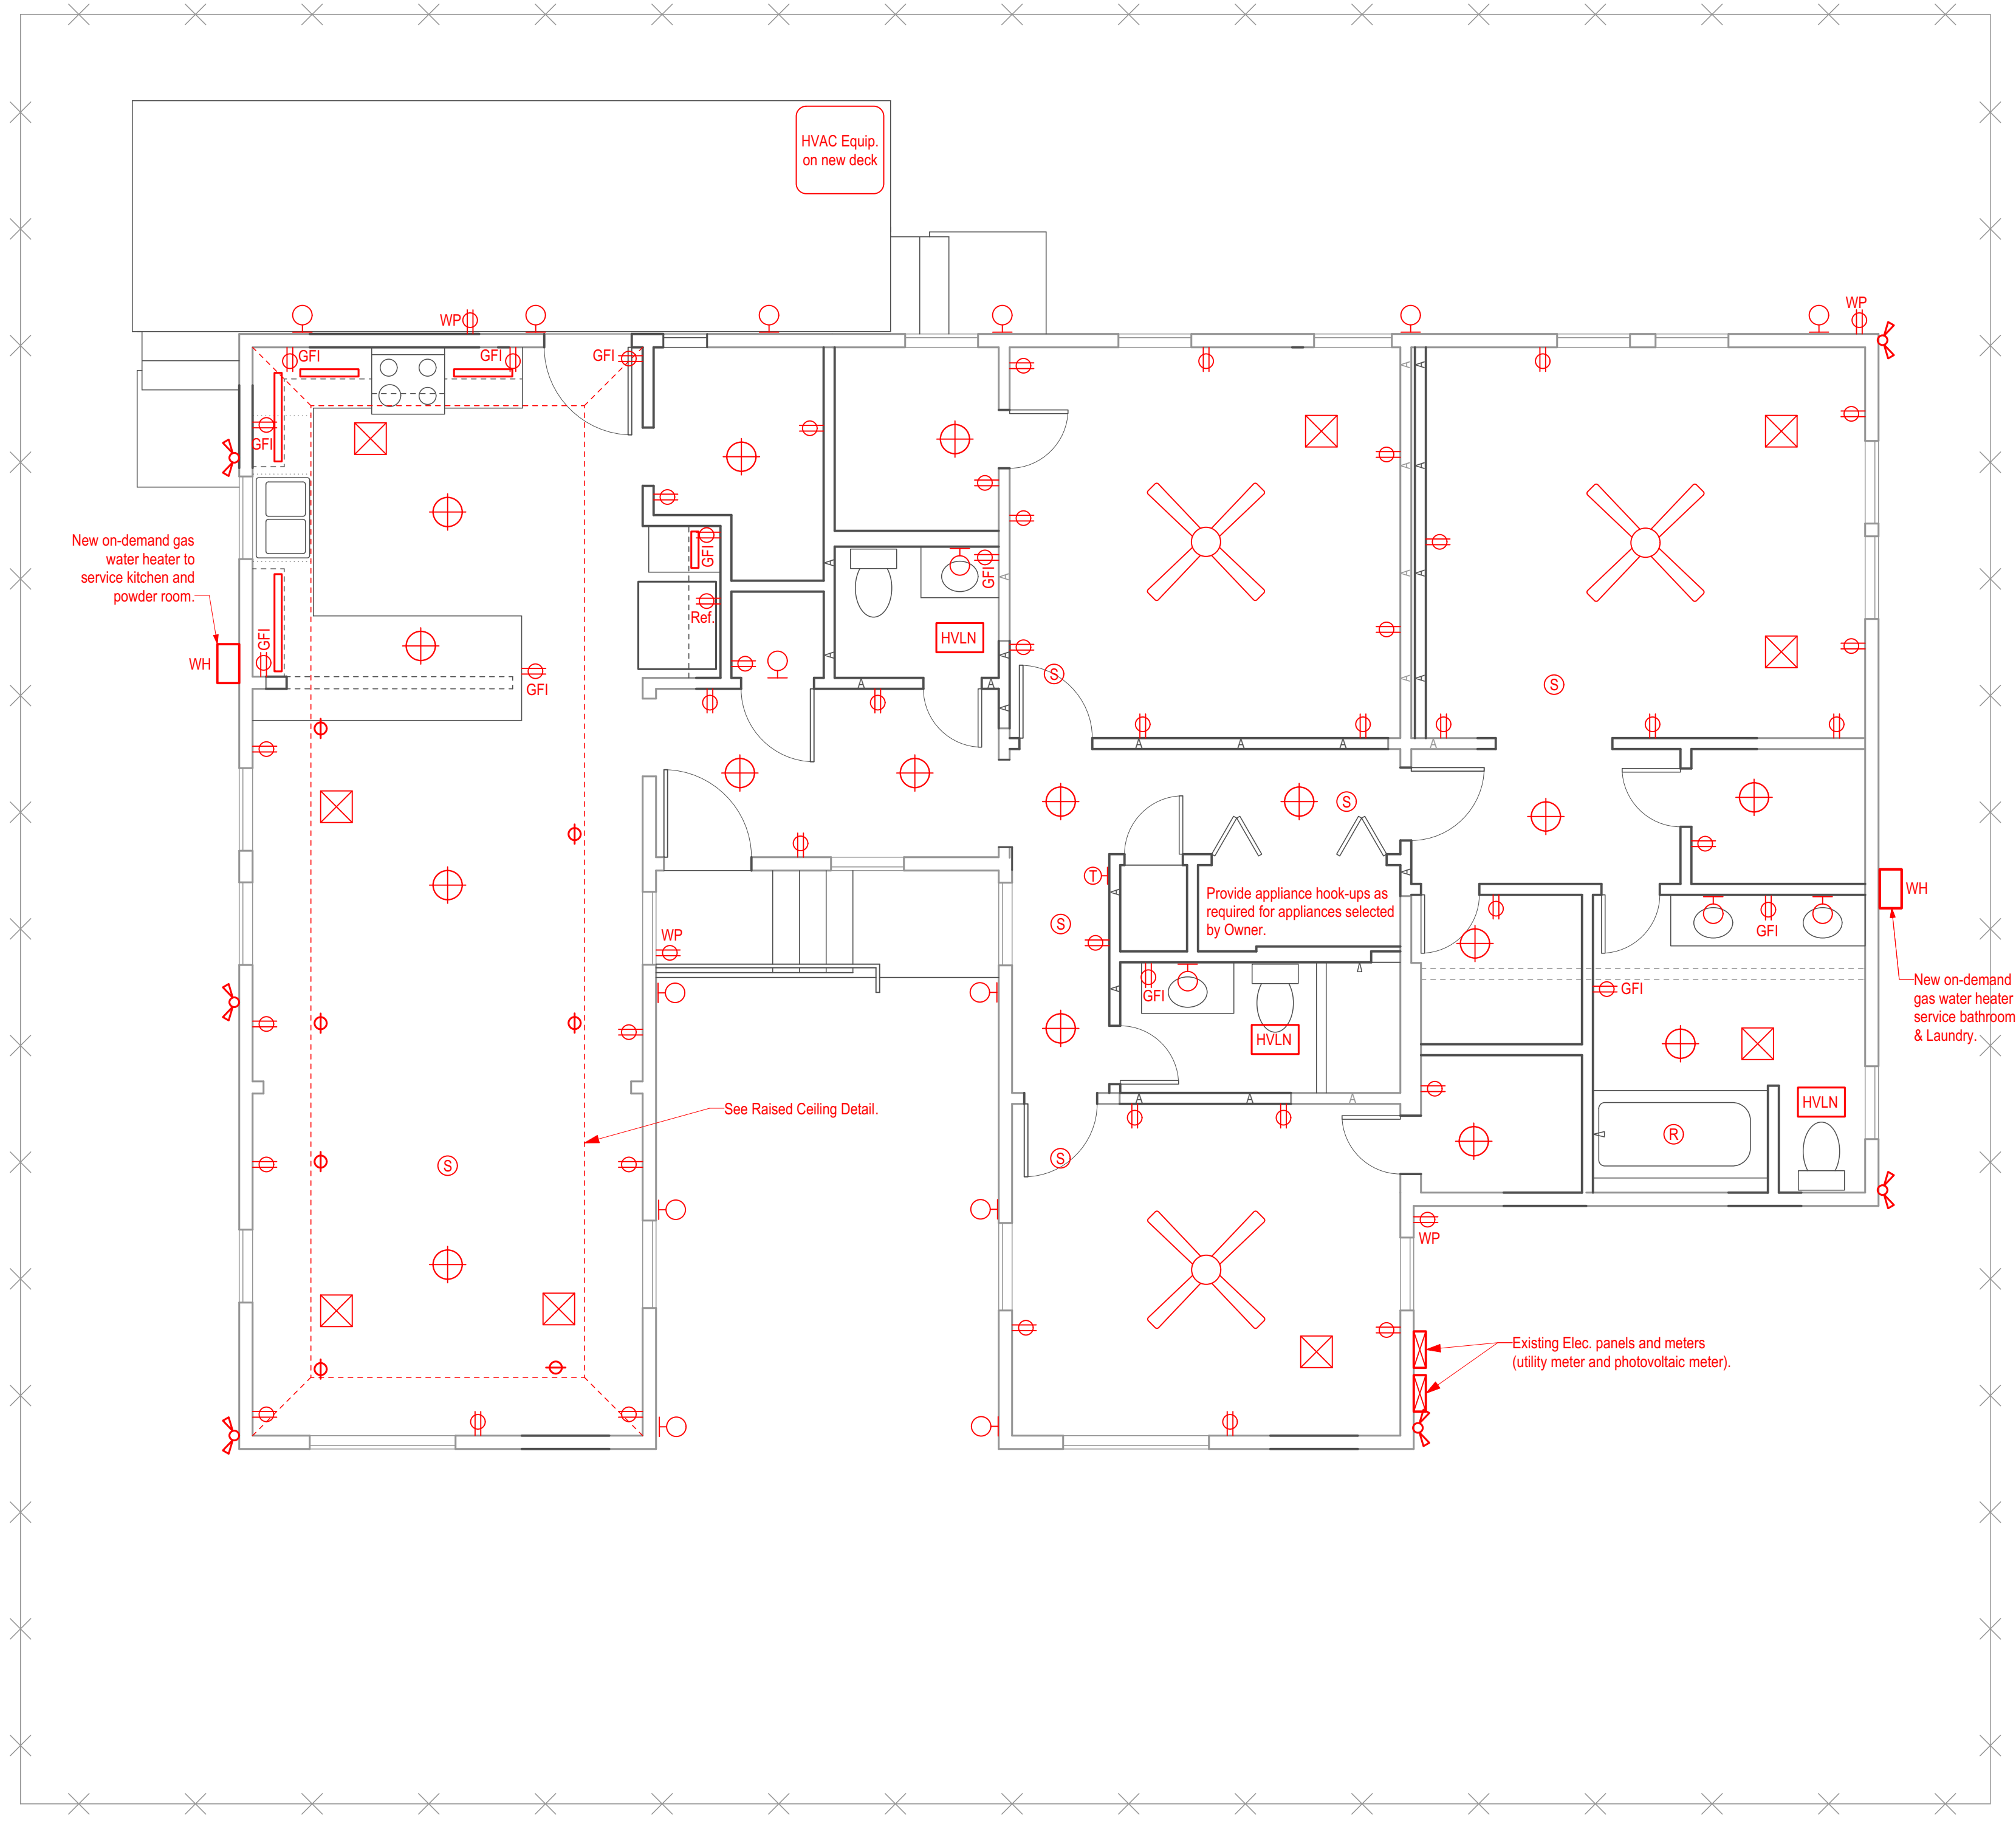


TRAP SIZE	FIXTURE
2"	KIT SINK
1-1/2"	LAV
2"	TUB/SHWR
1-1/2"	AC HUB
2"	WASH. MACH.

**2**  
A-2 Plumbing Riser Diagram  
Scale: 1/4" = 1'-0"

**1**  
A-2 Floor Plan  
Scale: 1/4" = 1'-0"



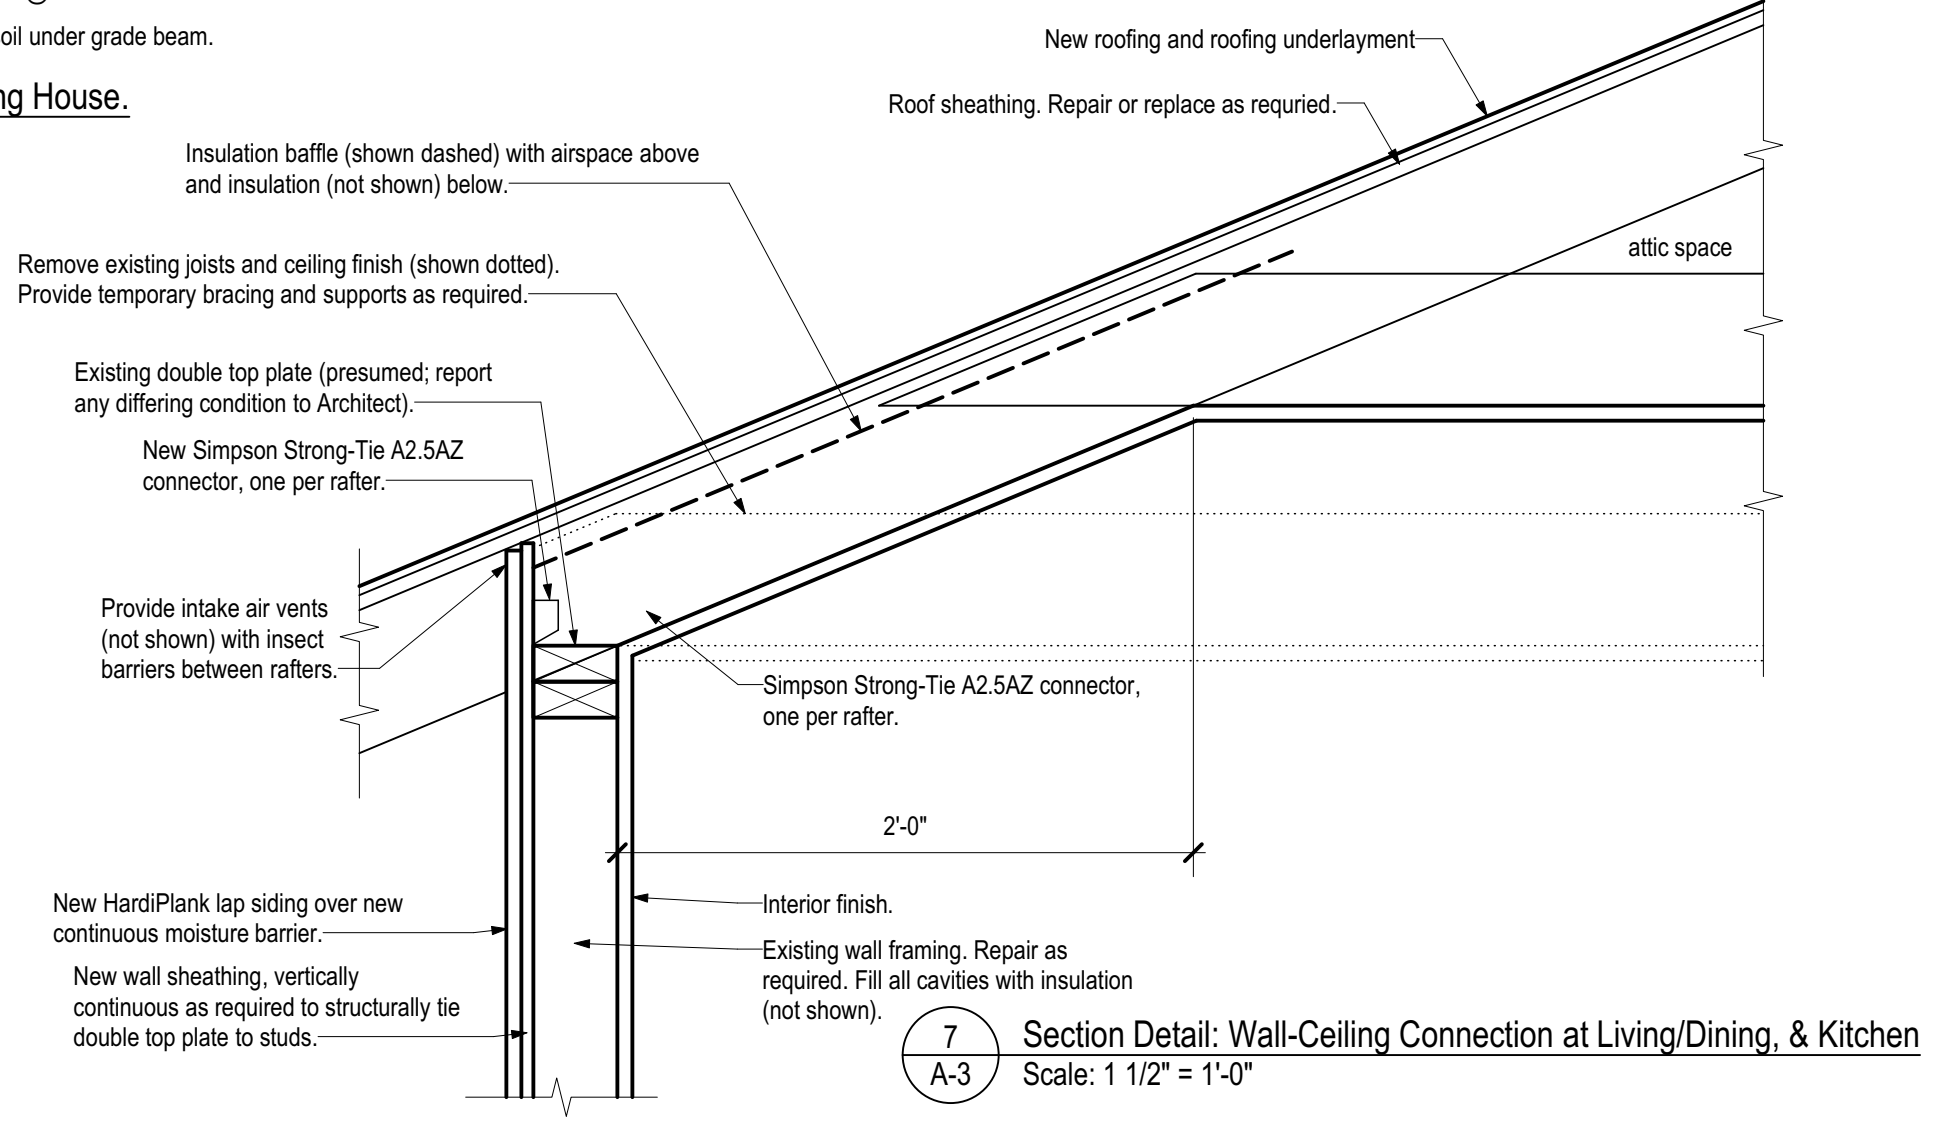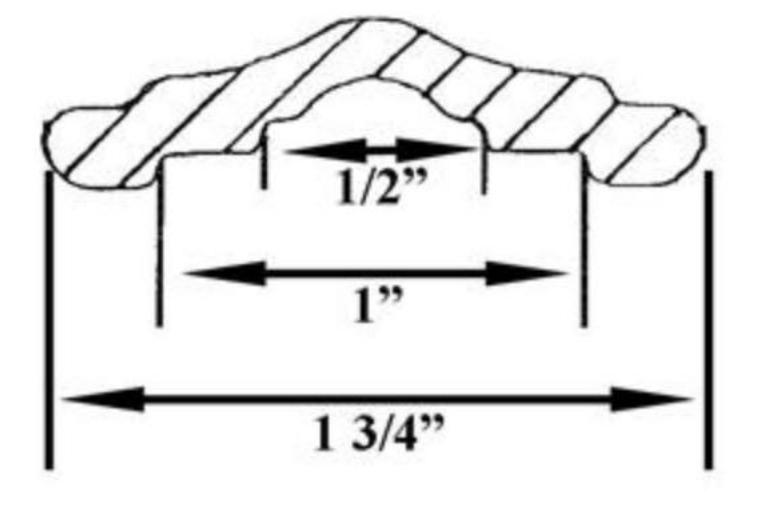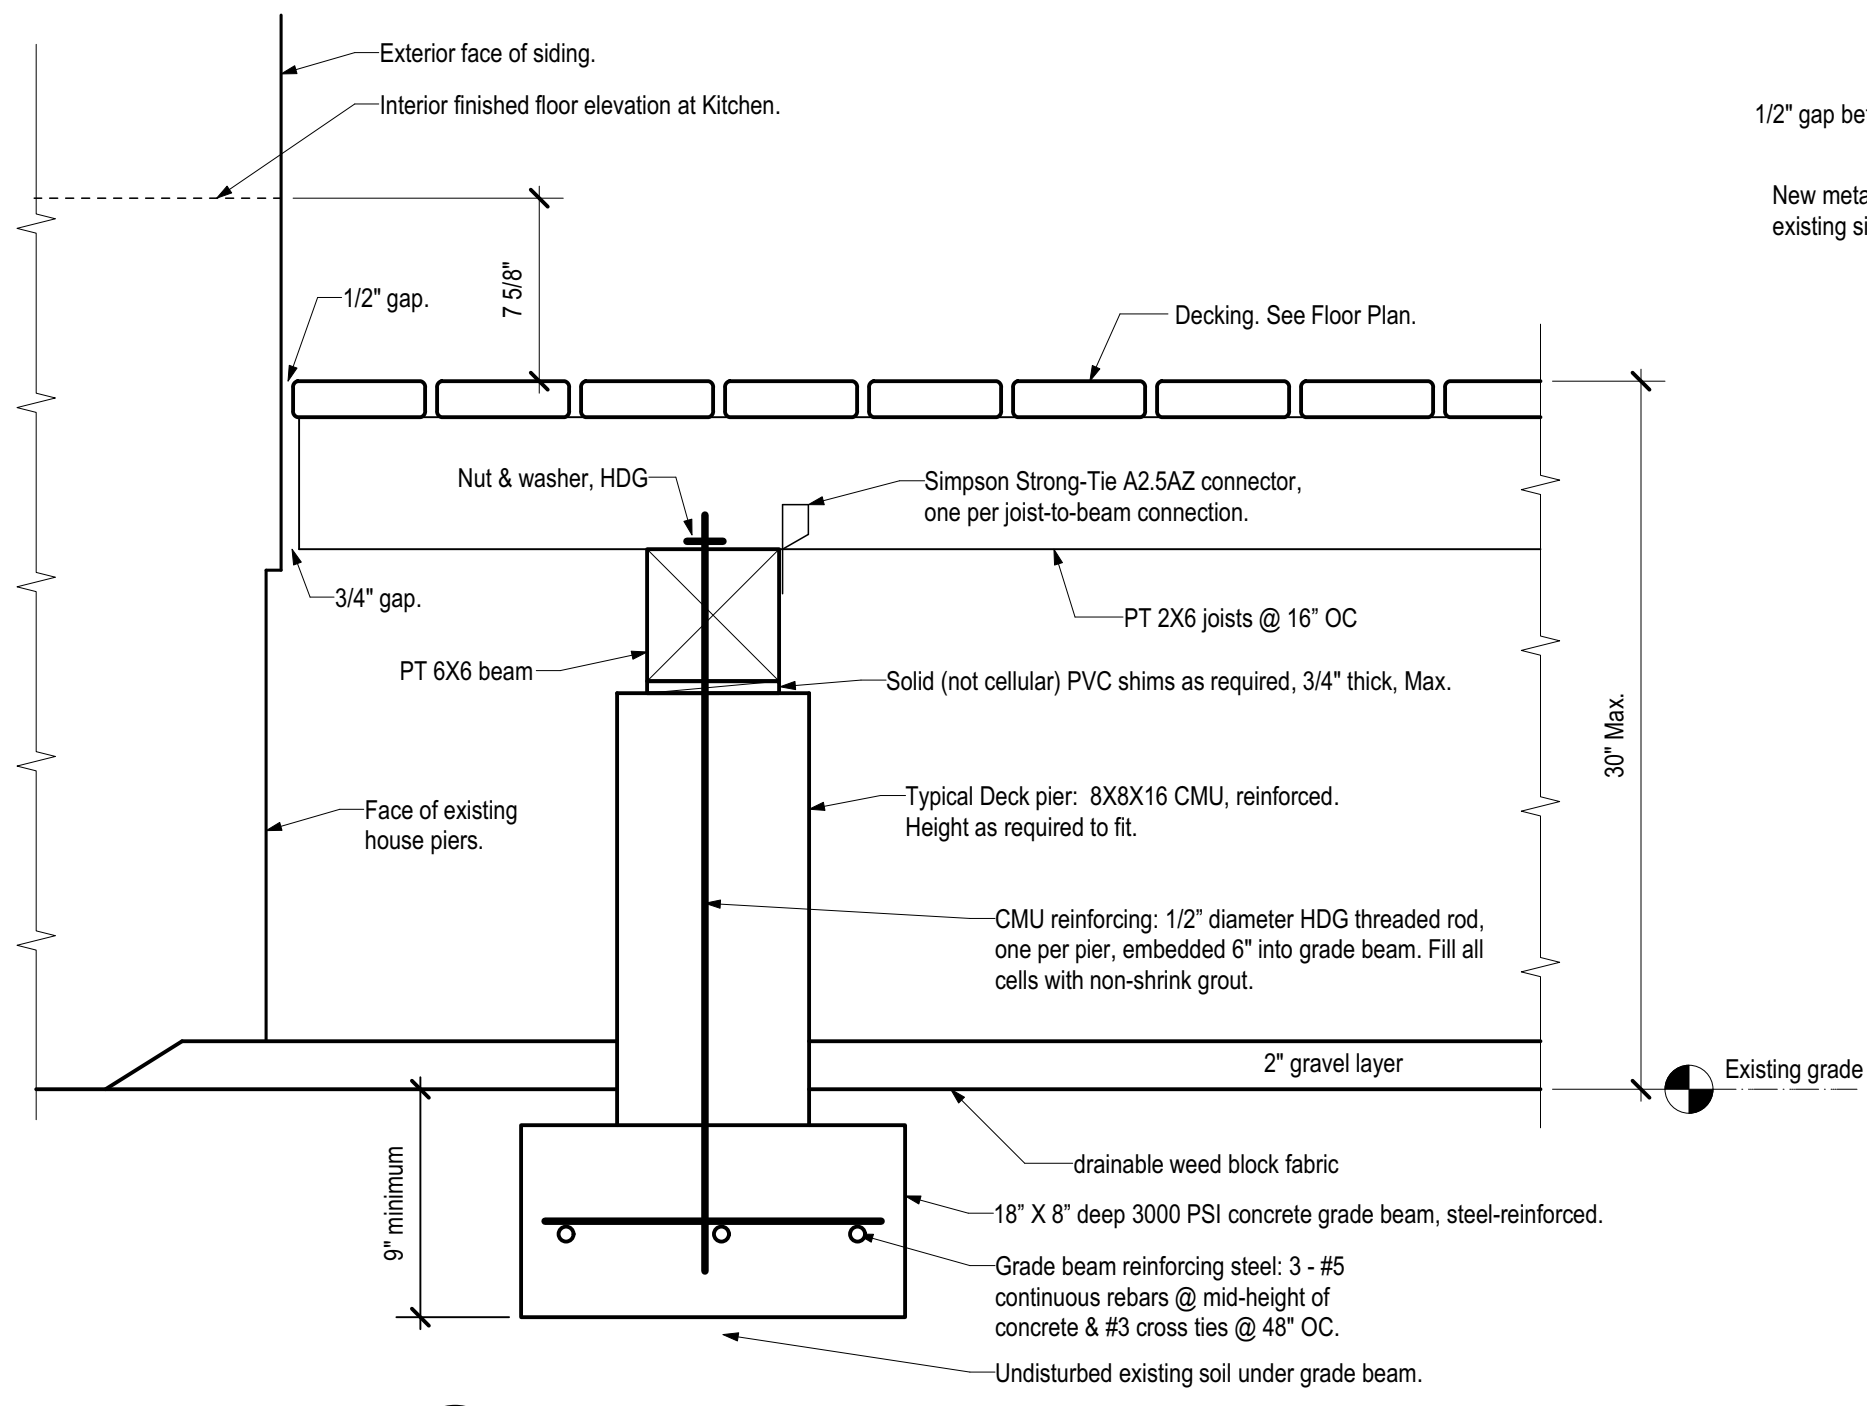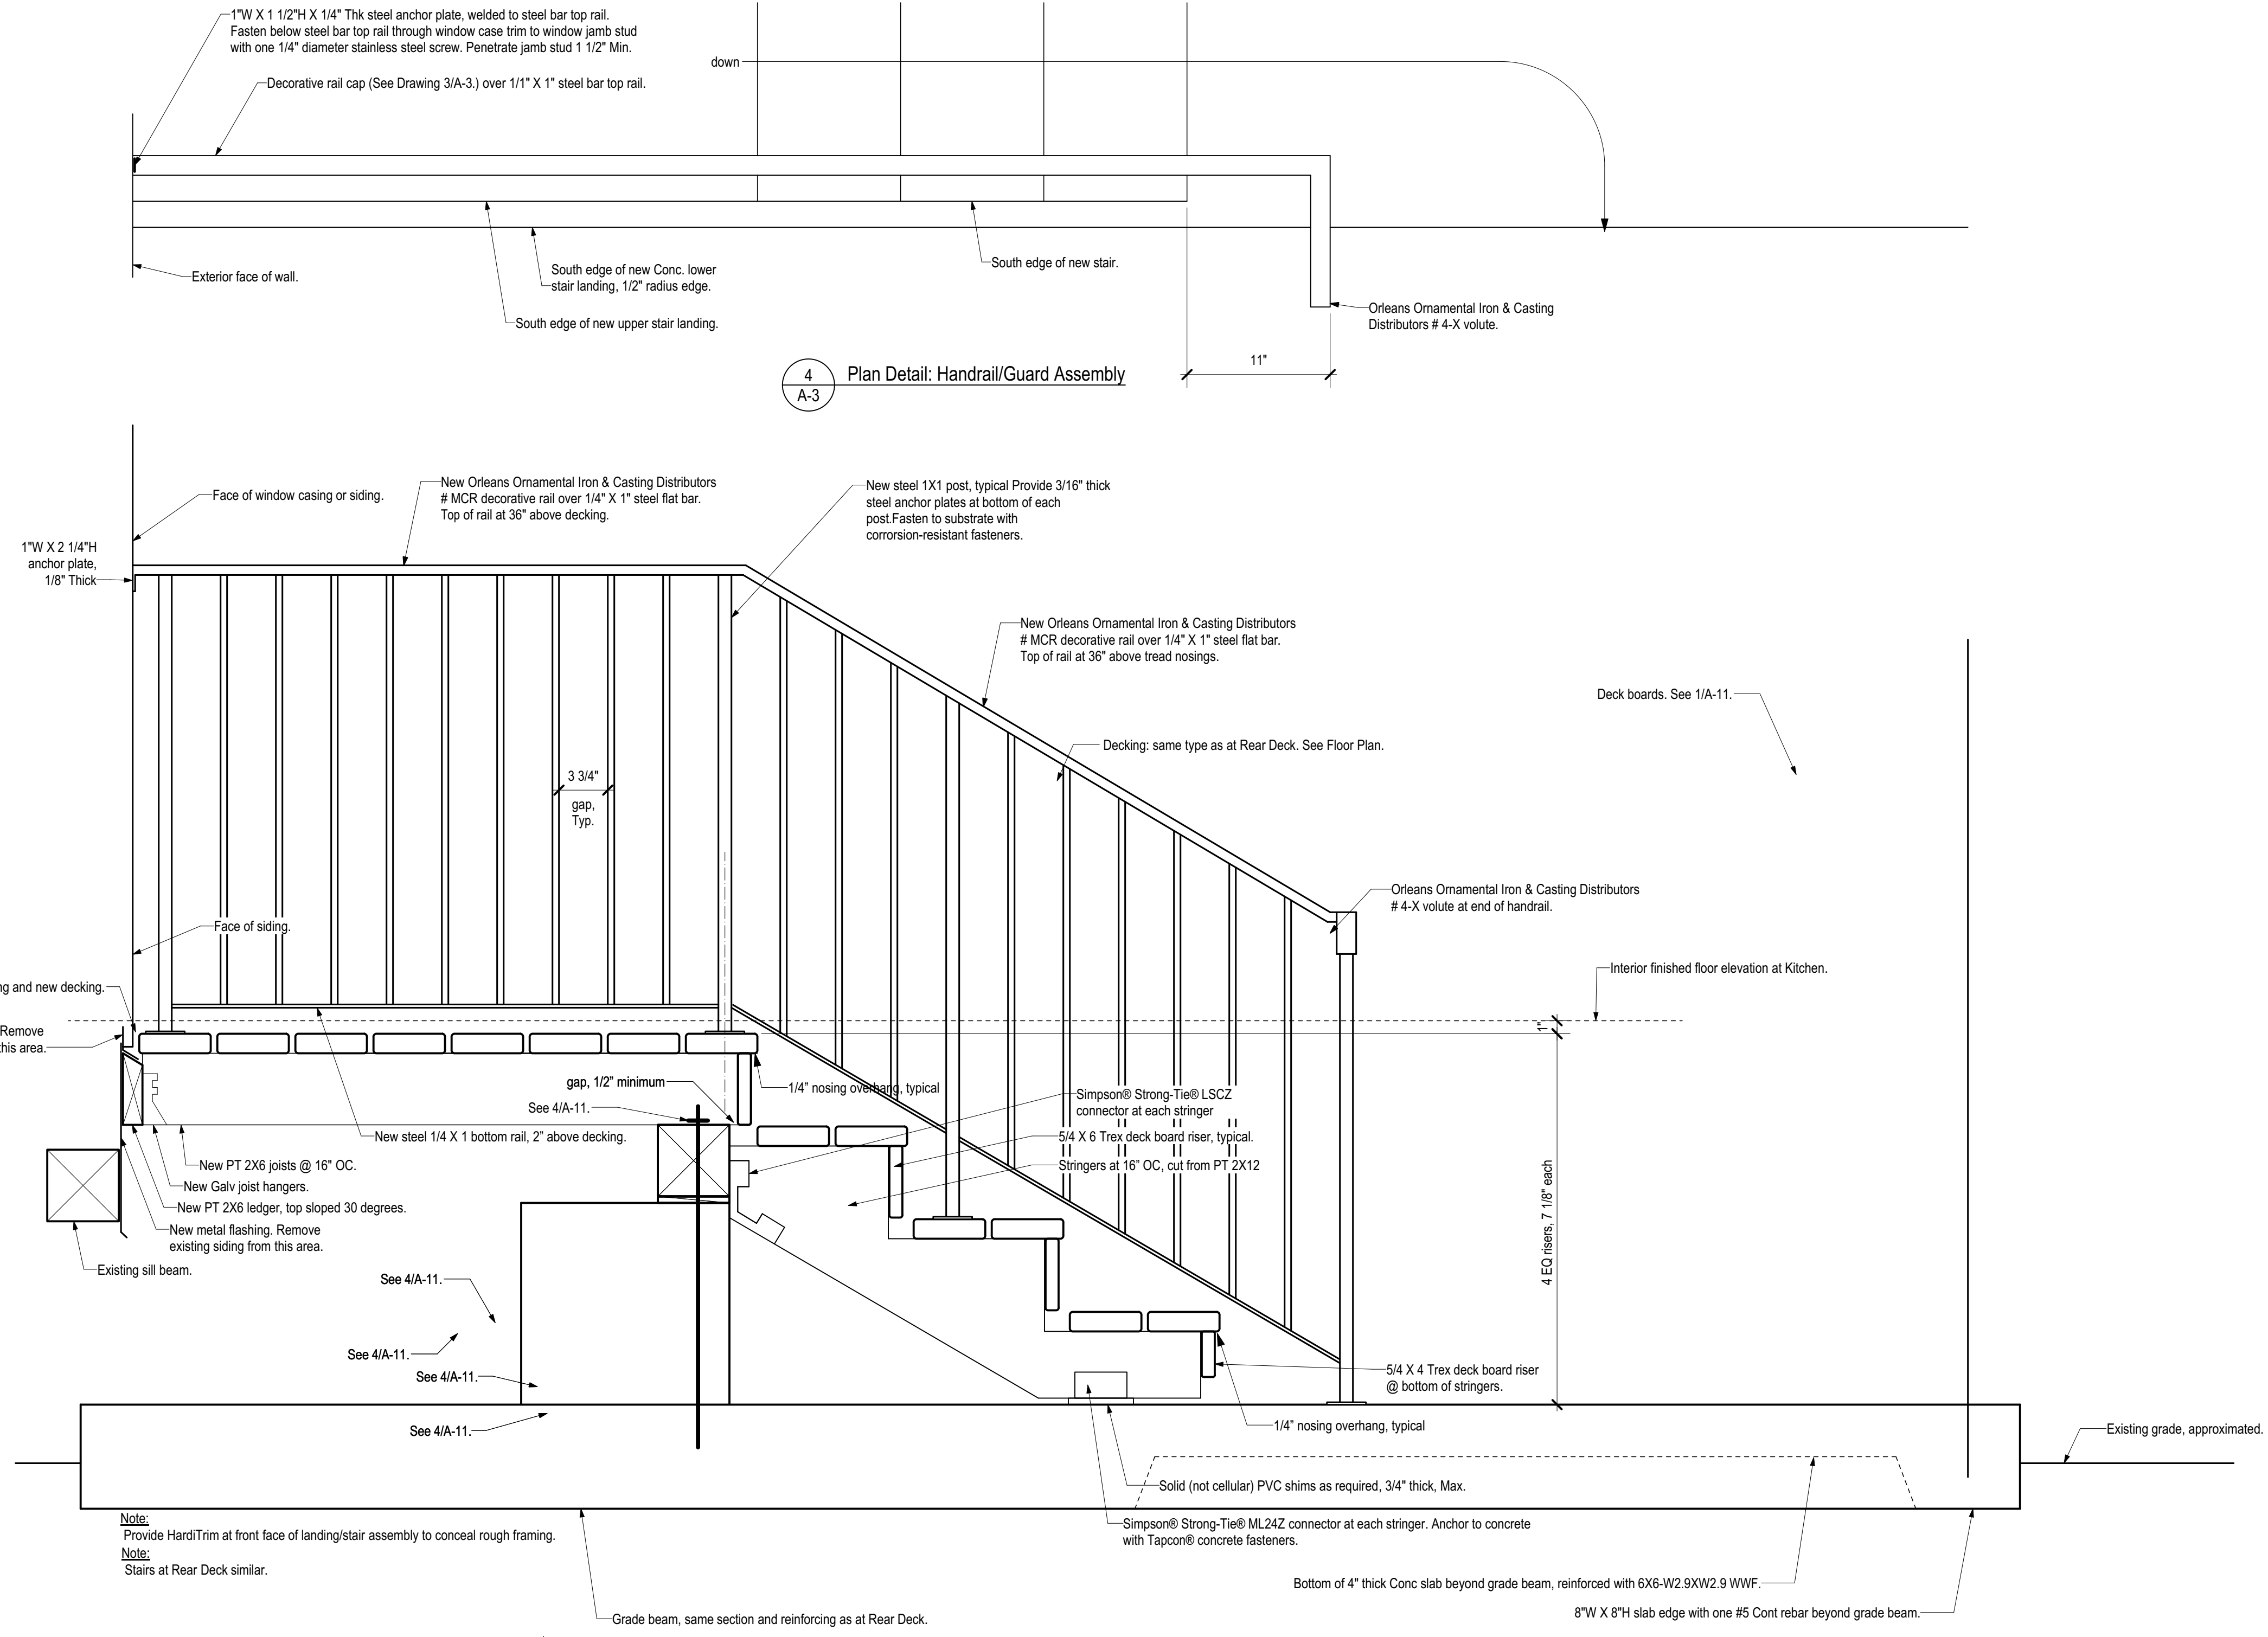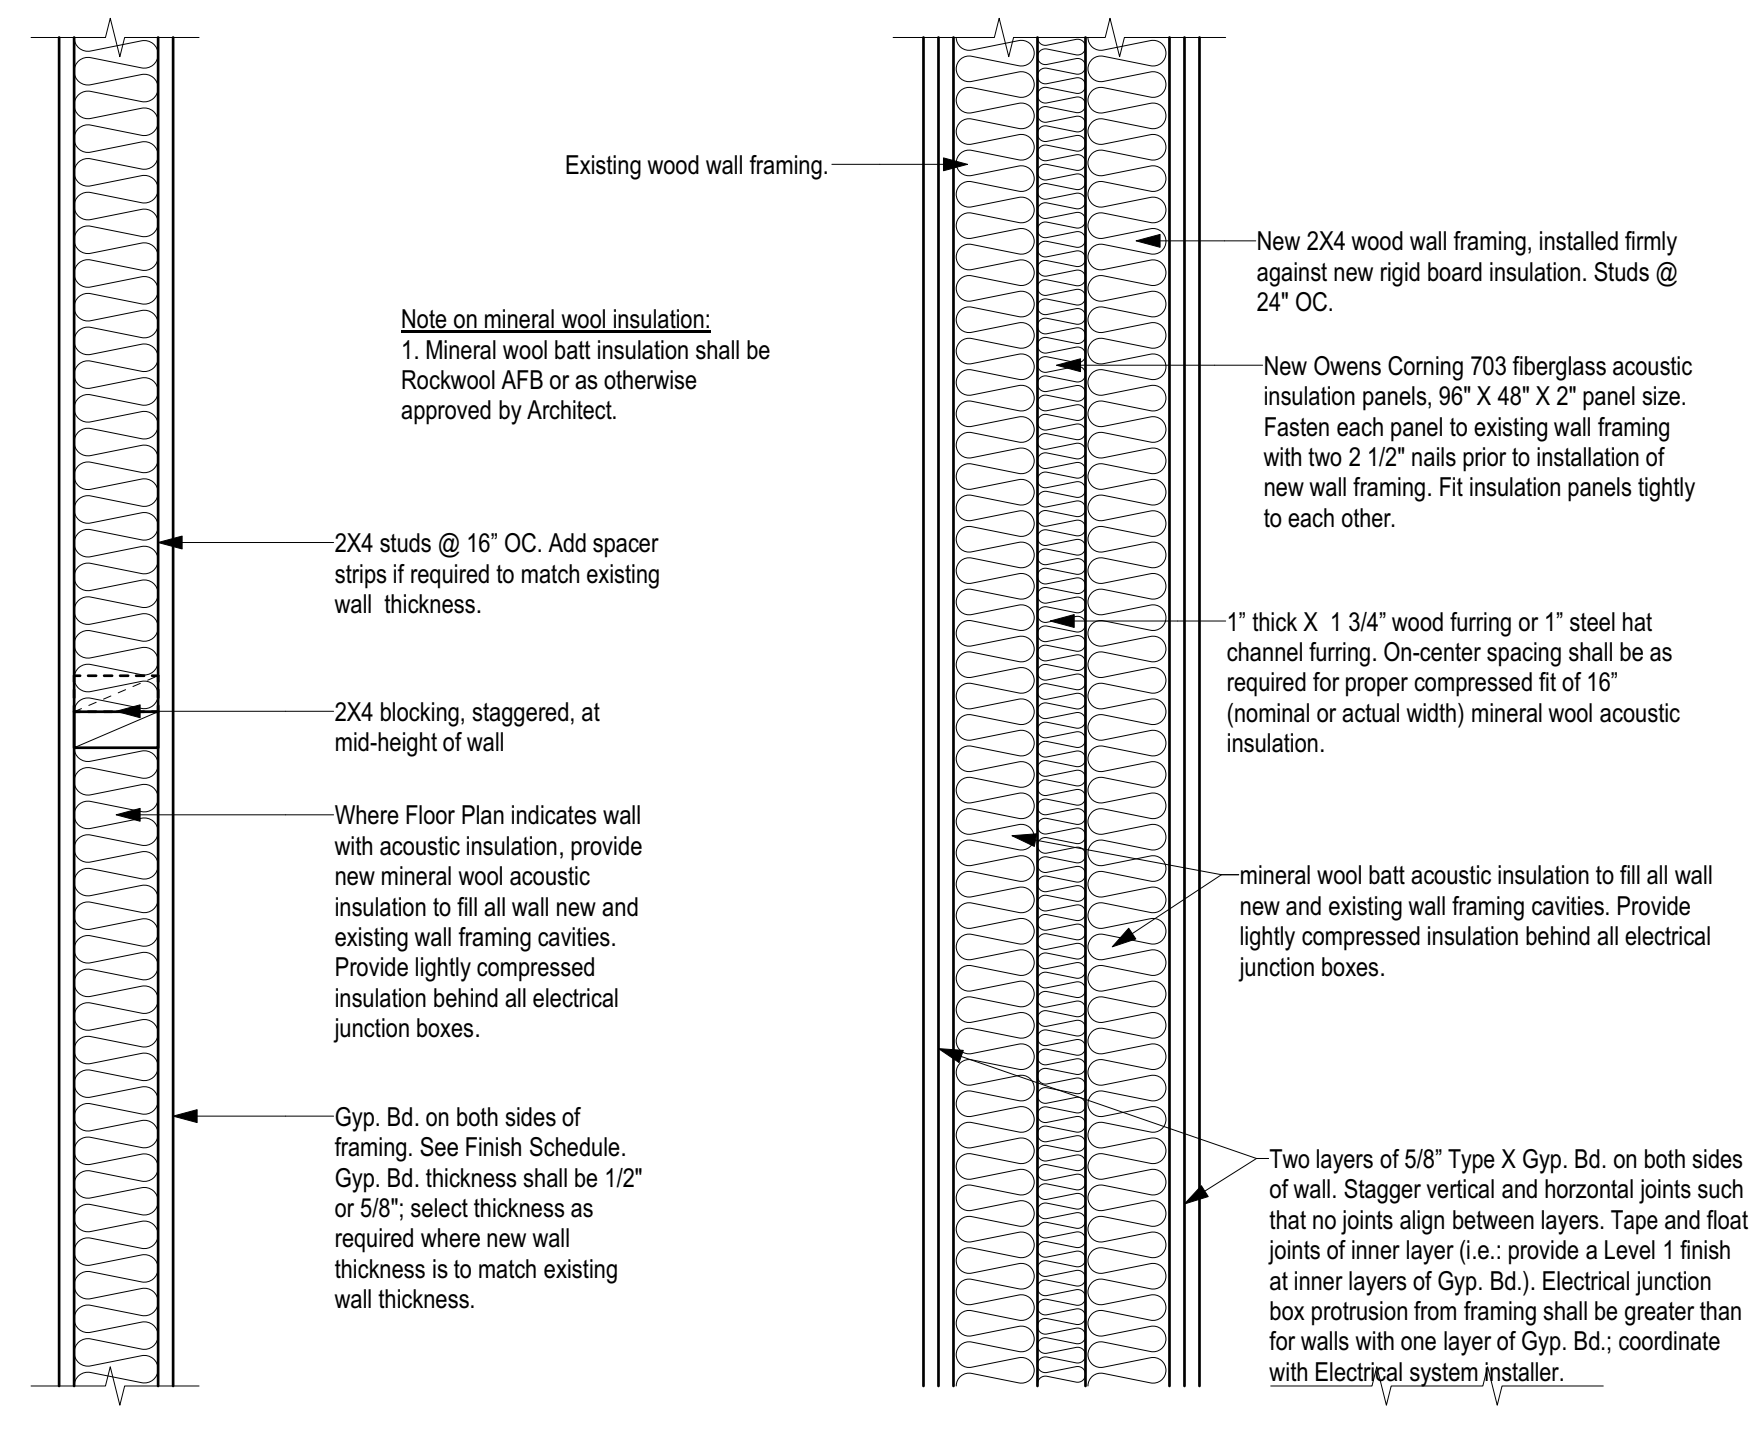

Notes on concrete work:  
 1. All new concrete shall have 3000 PSI minimum compressive strength.  
 2. Concrete walkways and landings shall have broom finish and radius edges.