










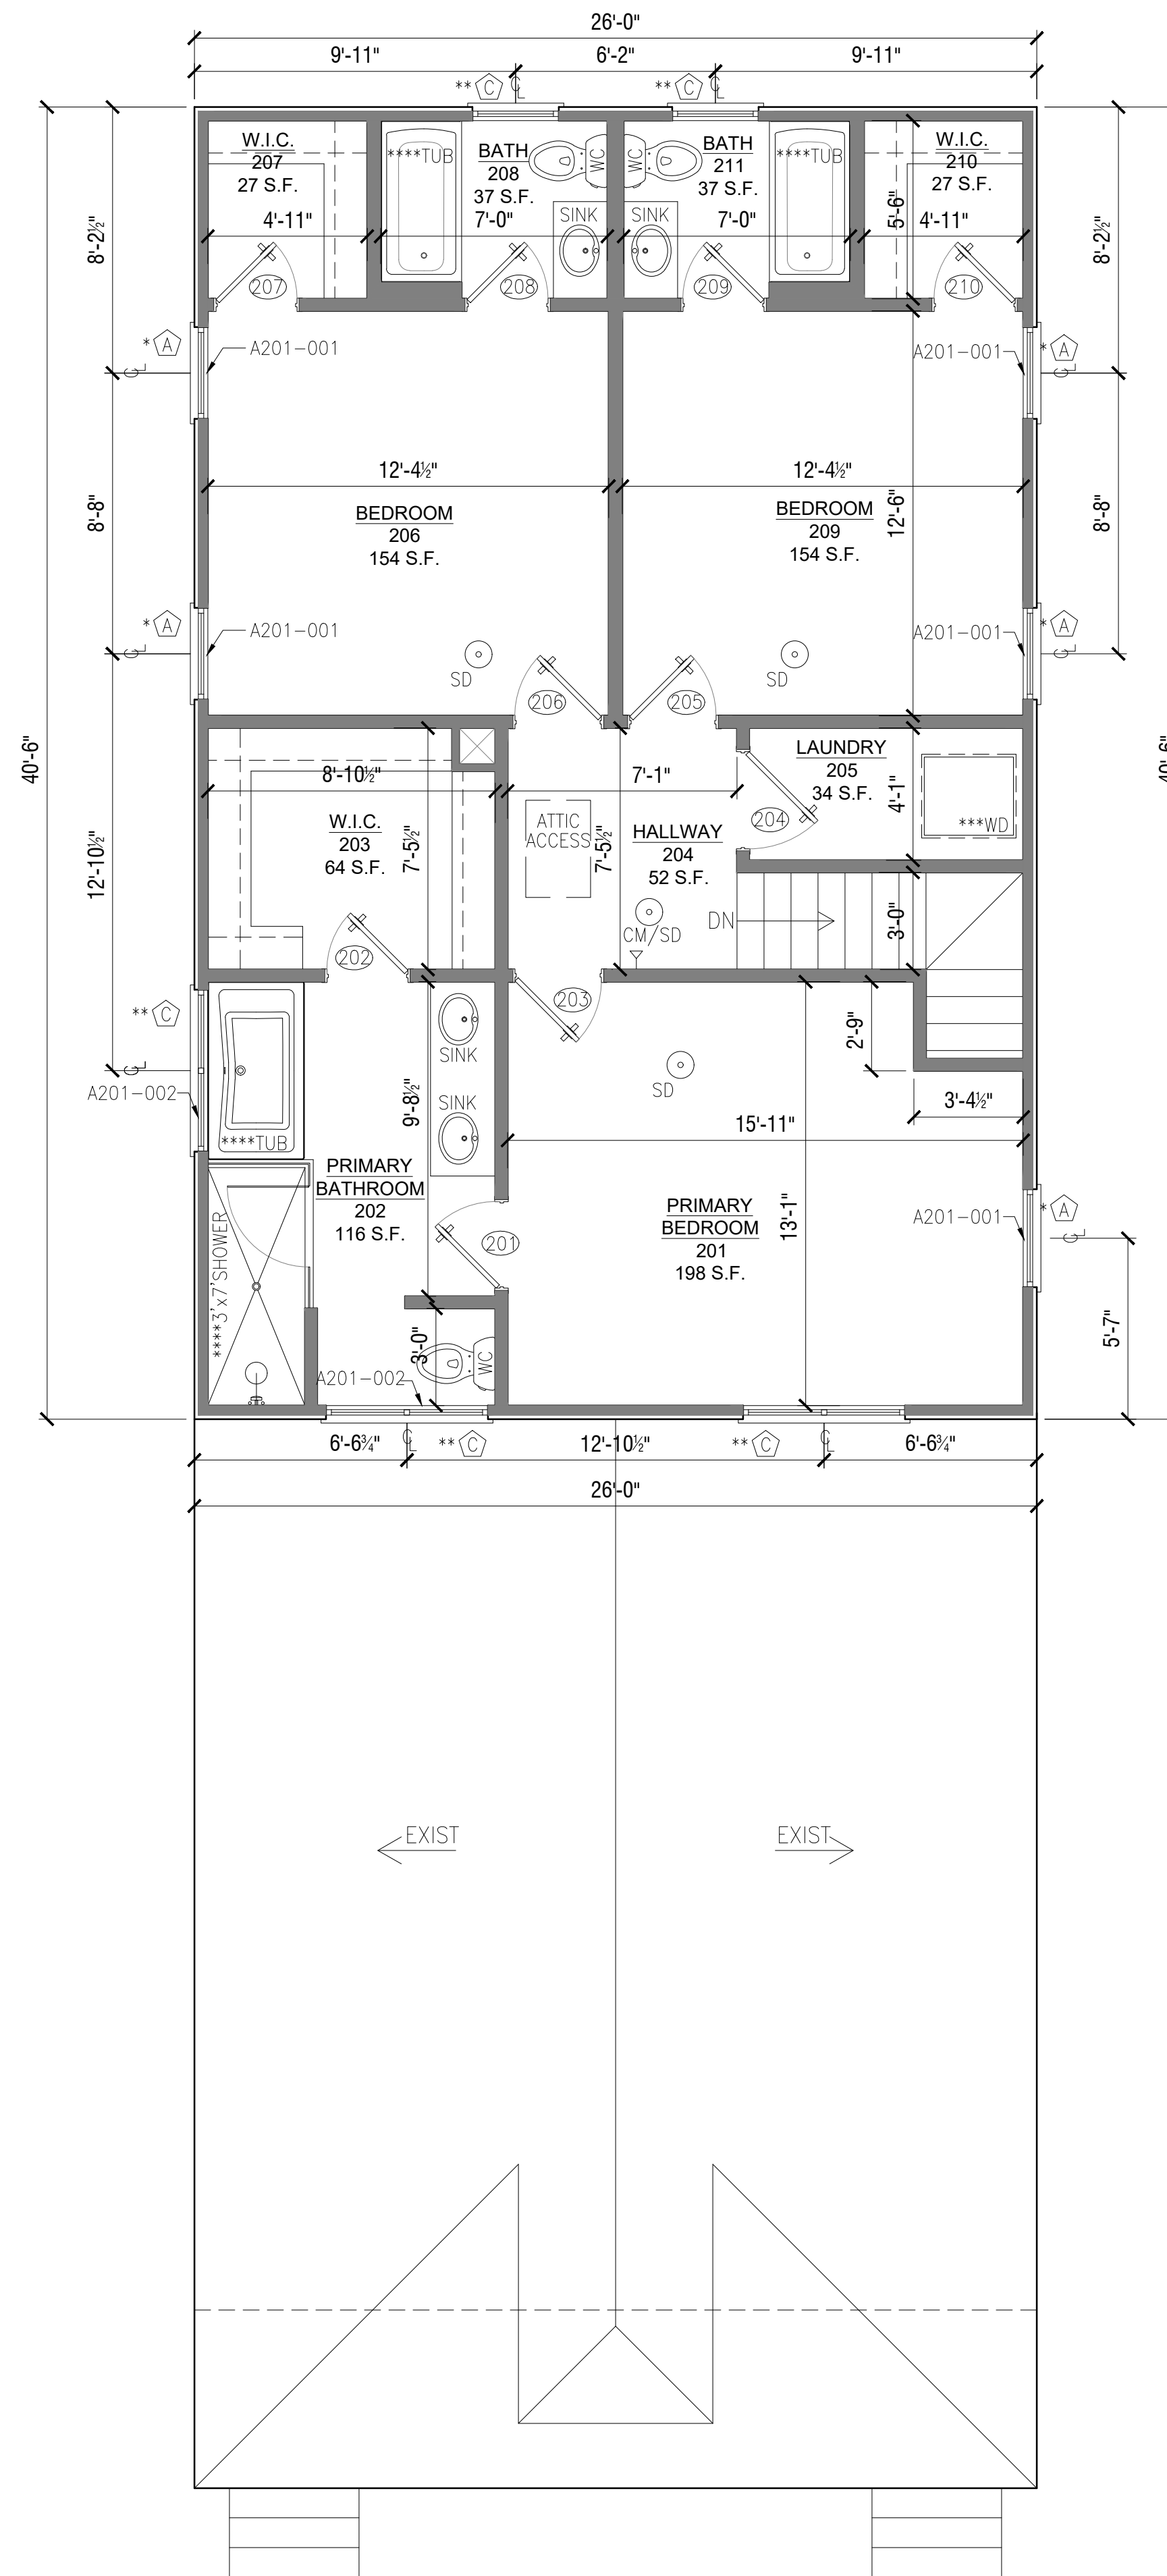
WALL KEY

-  EXIST. WOOD EXTERIOR WALL W/ SIDING
-  NEW WOOD EXTERIOR WALL OR INFILL W/ SIDING
-  EXISTING MASONRY WALL
-  EXIST. WOOD FRAMED WALL
-  NEW WOOD FRAMED INTERIOR WALL W/ 1/2" GYP.

SYMBOLS KEY

-  HOSE BIB
-  THERMOSTAT
-  SMOKE DETECTOR
-  CARBON MONOXIDE/ SMOKE DETECTOR

KEY NOTES	
TAG	DESCRIPTION
A201-001	NEW WINDOW TO MATCH EXISTING WOOD SINGLE-PANE 2/2 WINDOWS.
A201-002	SILL OF WINDOW TO BE MIN. 60" ABOVE FINISHED FLOOR.
A201-003	INFILL FLOORING AT LOCATION OF CHIMNEY REMOVAL. MATCH EXIST. FLOORS & LAP TO BLEND.
A201-004	INFILL EXISTING DOOR OPENING WITH WOOD STUDS & 1/2" GYP. AT INTERIOR & PLYWOOD SHEATHING WITH SIDING AT EXTERIOR. SIDING TO MATCH EXIST. LAP TO BLEND.
A201-005	INFILL EXISTING WINDOW OPENING WITH WOOD STUDS & 1/2" GYP. AT INTERIOR & PLYWOOD SHEATHING WITH SIDING AT EXTERIOR. SIDING TO MATCH EXIST. LAP TO BLEND.
A201-006	PROVIDE LVL BEAM TO SUPPORT CEILING JOISTS AT LOCATION OF CENTER WALL REMOVAL. SEE STRUCTURAL FOR LVL SIZES. WRAP BEAM IN WOOD TO BE PAINTED OR STAINED.
A201-007	PROVIDE DECORATIVE BEAM AT LOCATION OF POCKET DOOR REMOVAL. WRAP BEAM IN WOOD TO BE PAINTED OR STAINED.




2 PROPOSED 2ND FLOOR PLAN

Scale: 1/4"=1'-0"

NOTE: CONTRACTOR TO HIRE STRUCTURAL ENGINEER TO EXAMINE EXISTING FOUNDATION & DETERMINE IF FOUNDATION WORK IS REQUIRED TO SUPPORT NEW SECOND STORY.

- * WINDOW SILL 60" OR GREATER ABOVE FINISHED FLOOR.
 - ** WINDOW MEETS EGRESS REQUIREMENTS.
 - *** PROVIDE OVERFLOW PAN & DRAIN AT WASHER. VENT DRYER DIRECTLY TO OUTSIDE.
 - **** PROVIDE TILE SURROUND AT ALL TUBS AND SHOWERS.
- SEE A301 & A302 FOR MECHANICAL, ELECTRICAL & PLUMBING INFO.
- SEE A203 PLAN NOTES #9 FOR INSULATION REQUIREMENTS
- LOCATE CONDENSING UNITS ON PLATFORM ABOVE BASE FLOOD ELEVATION & MIN. 3'-0" FROM PROPERTY LINE. SEE A100 FOR LOCATION.

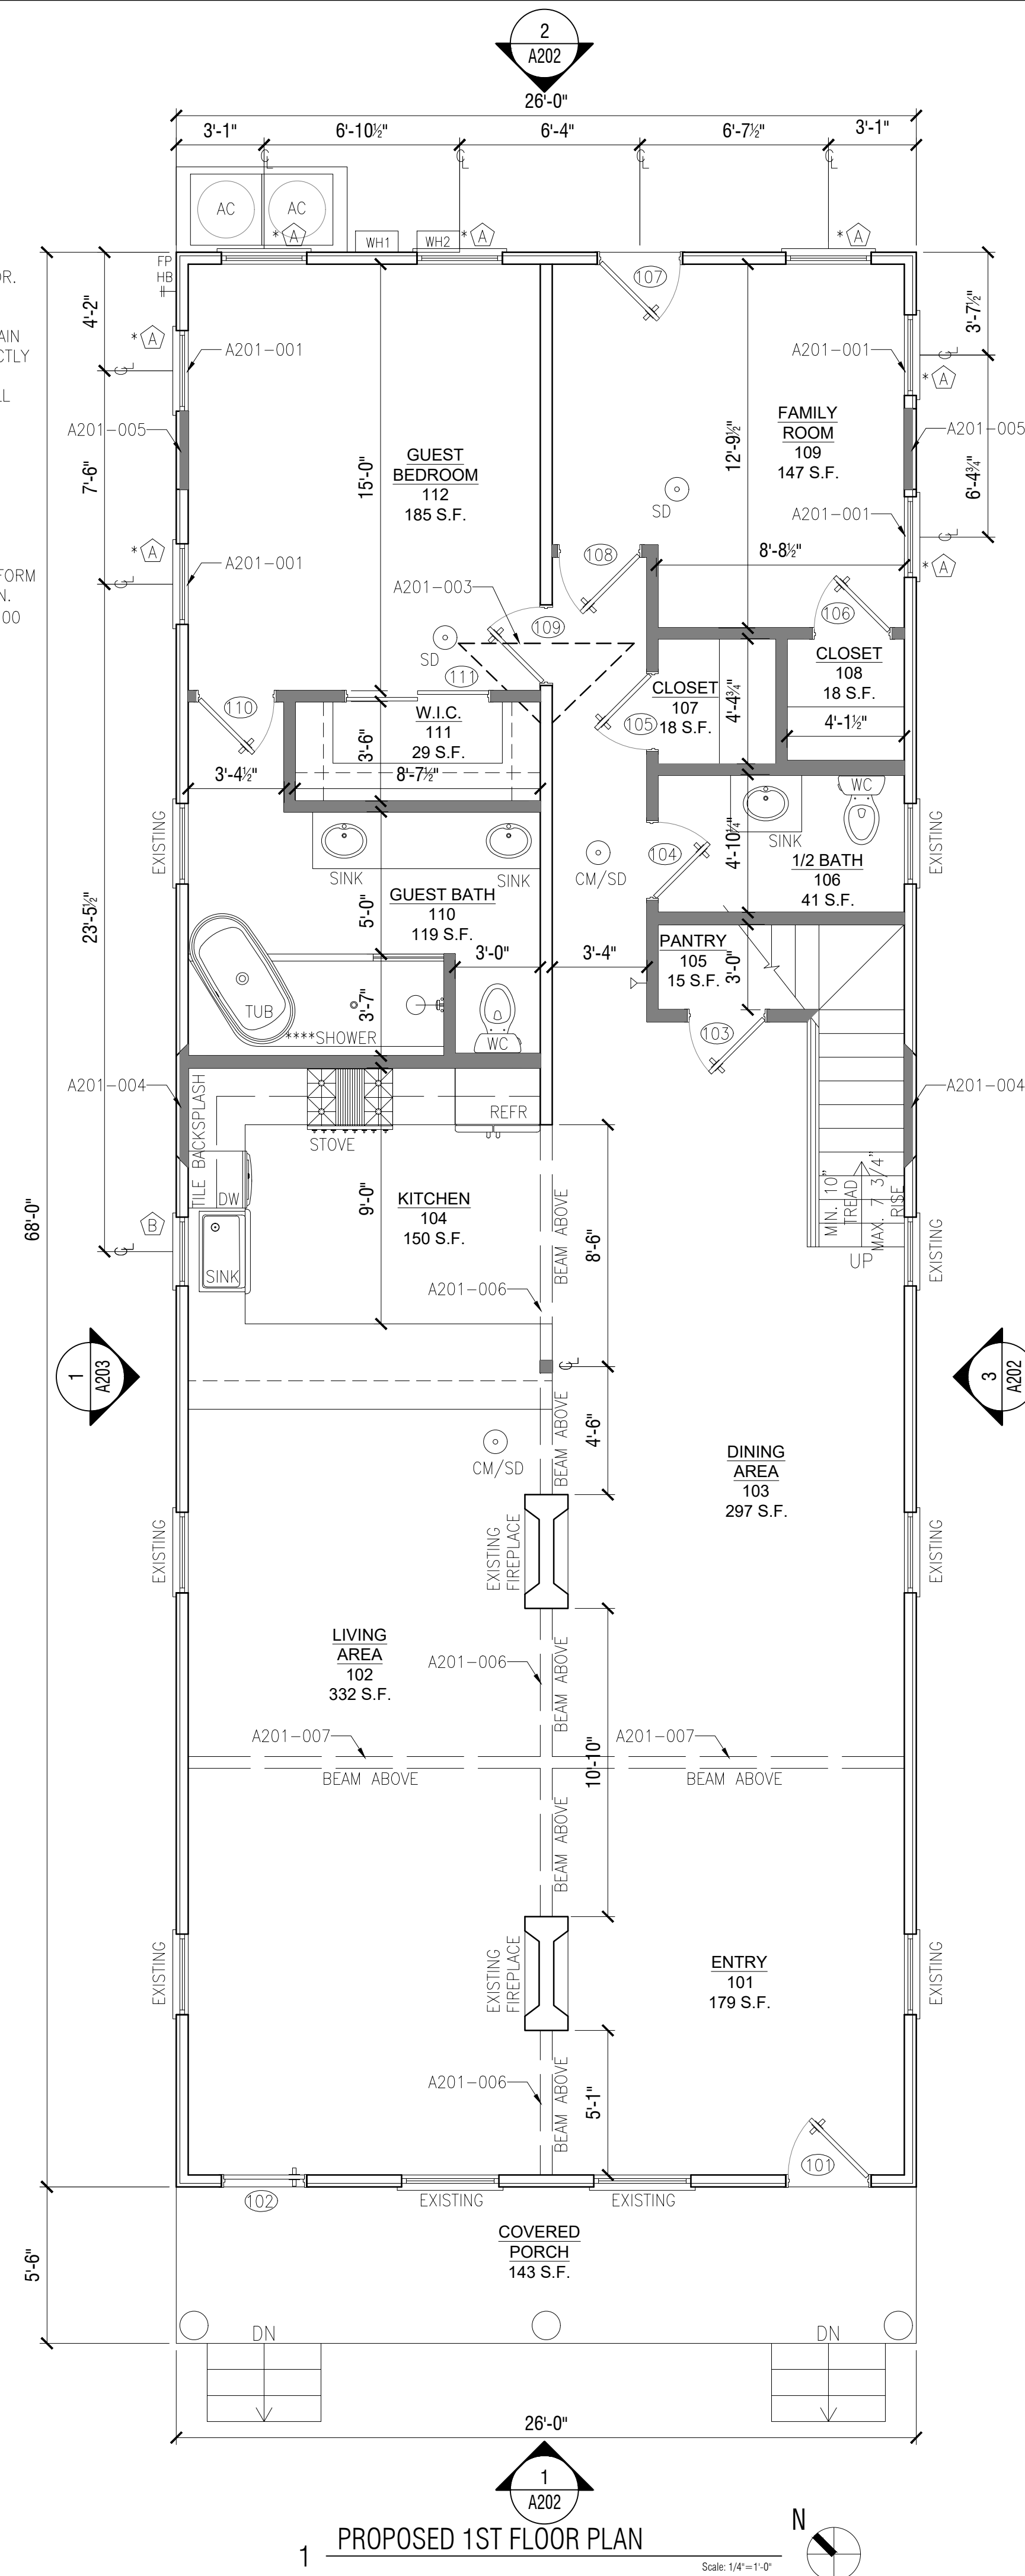


1 PROPOSED 1ST FLOOR PLAN

Scale: 1/4"=1'-0"

DOB STAMP

NO.	REVISIONS/SUBMISSIONS	DATE
	FOR PERMIT	07/28/22

DRAWN BY: KJ

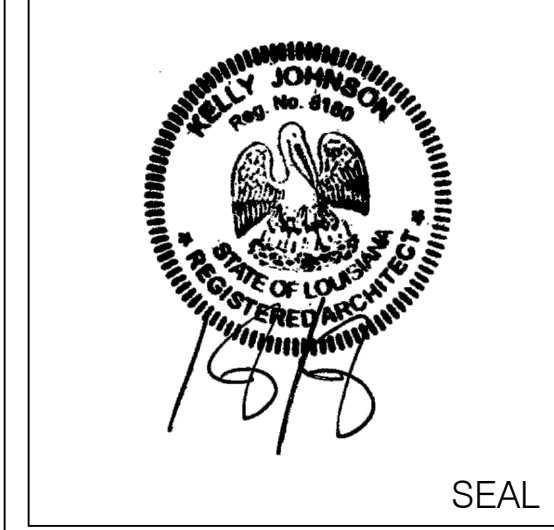

ENGINEER

LOCATION:
PRIVATE RESIDENCE
 5430 LAUREL STREET
 NEW ORLEANS, LA 70115

DRAWING TITLE:
PROPOSED PLANS


PROJECT:
22-R-09

FOR PERMIT


A201
 SHEET

KKJOHNSON ARCHITECTURE & DESIGN
 4618 Camp Street, New Orleans, LA 70115
 e: kjohnson@kjohnsonarchitecture.com
 p: 504.327.9717


KK ARCHITECTURE
 & Design

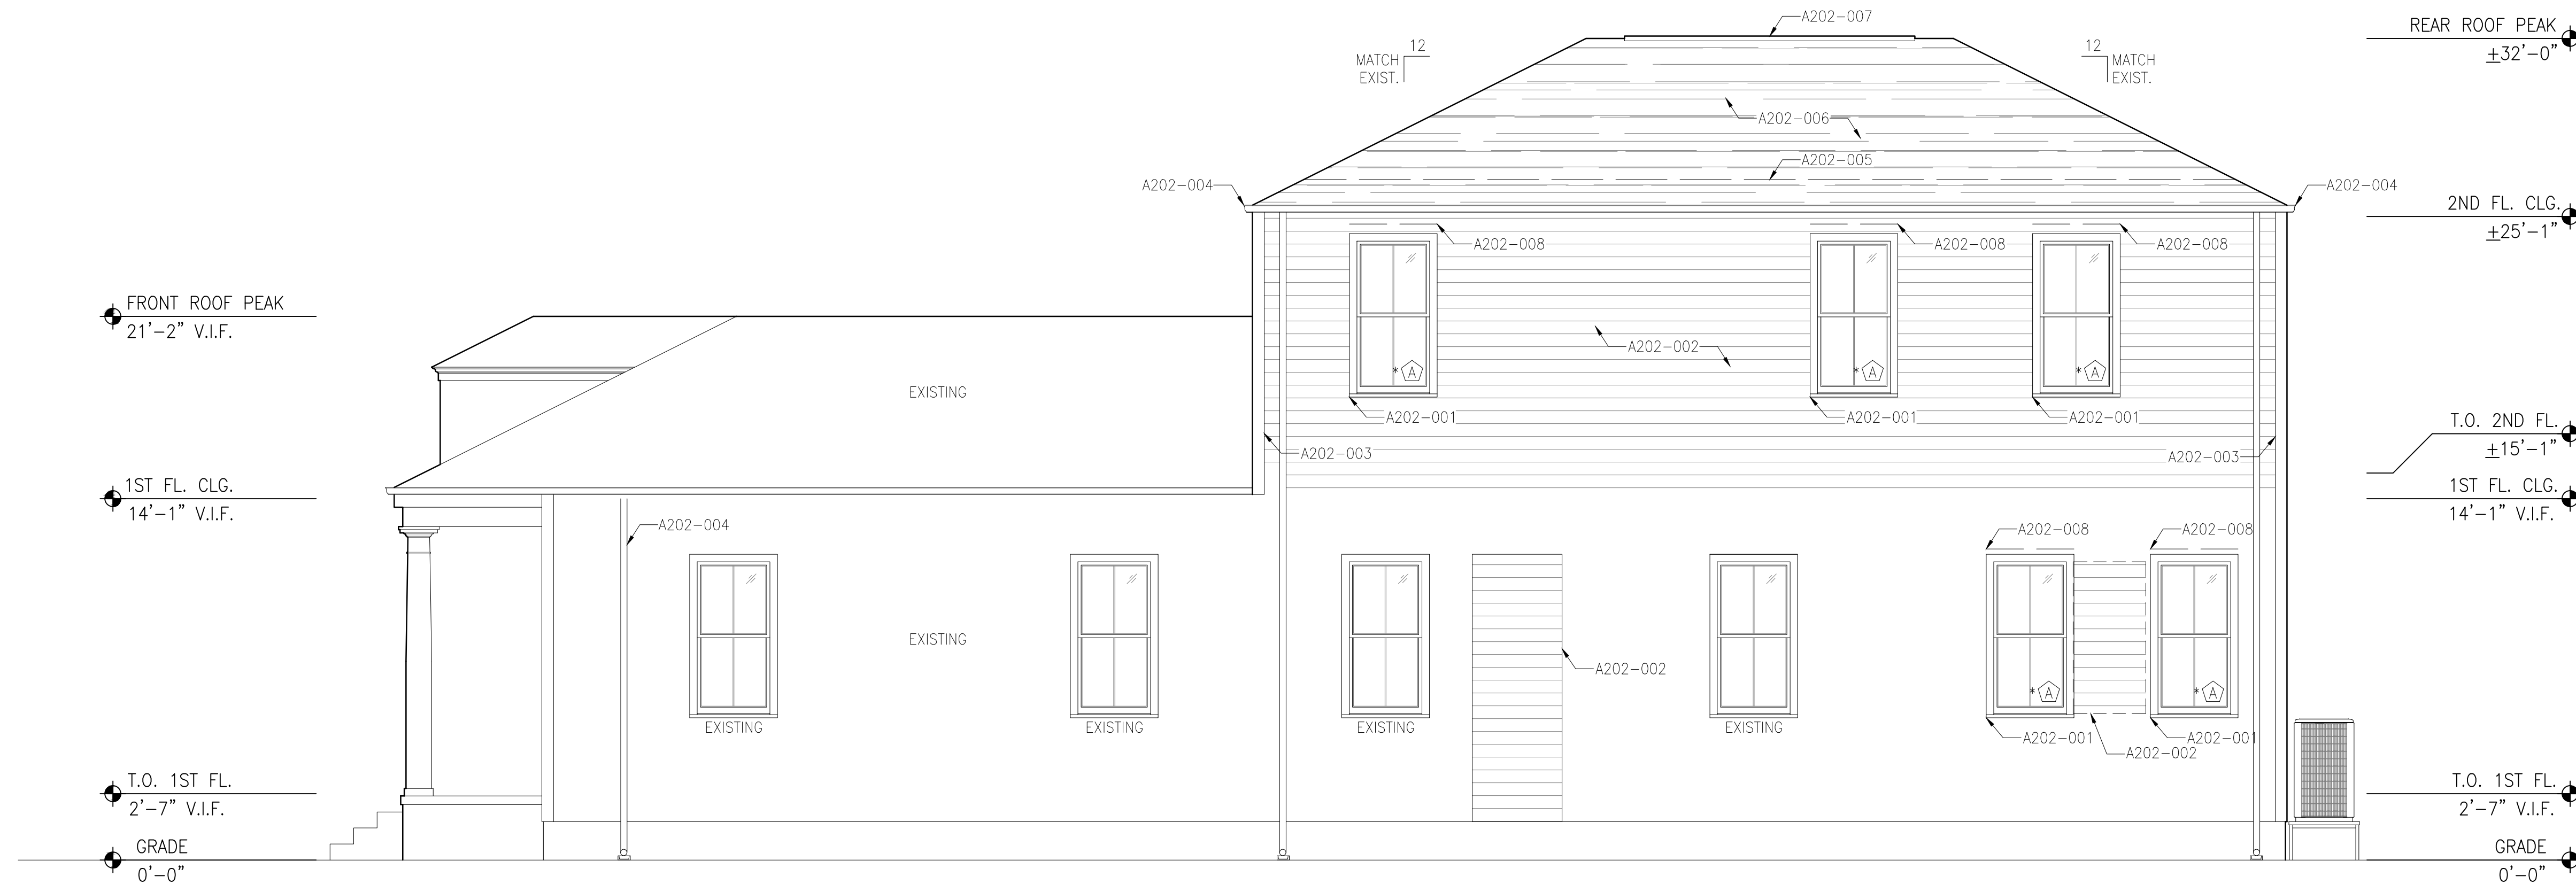

3 PROPOSED SIDE ELEVATION
Scale: 1/4"=1'-0"

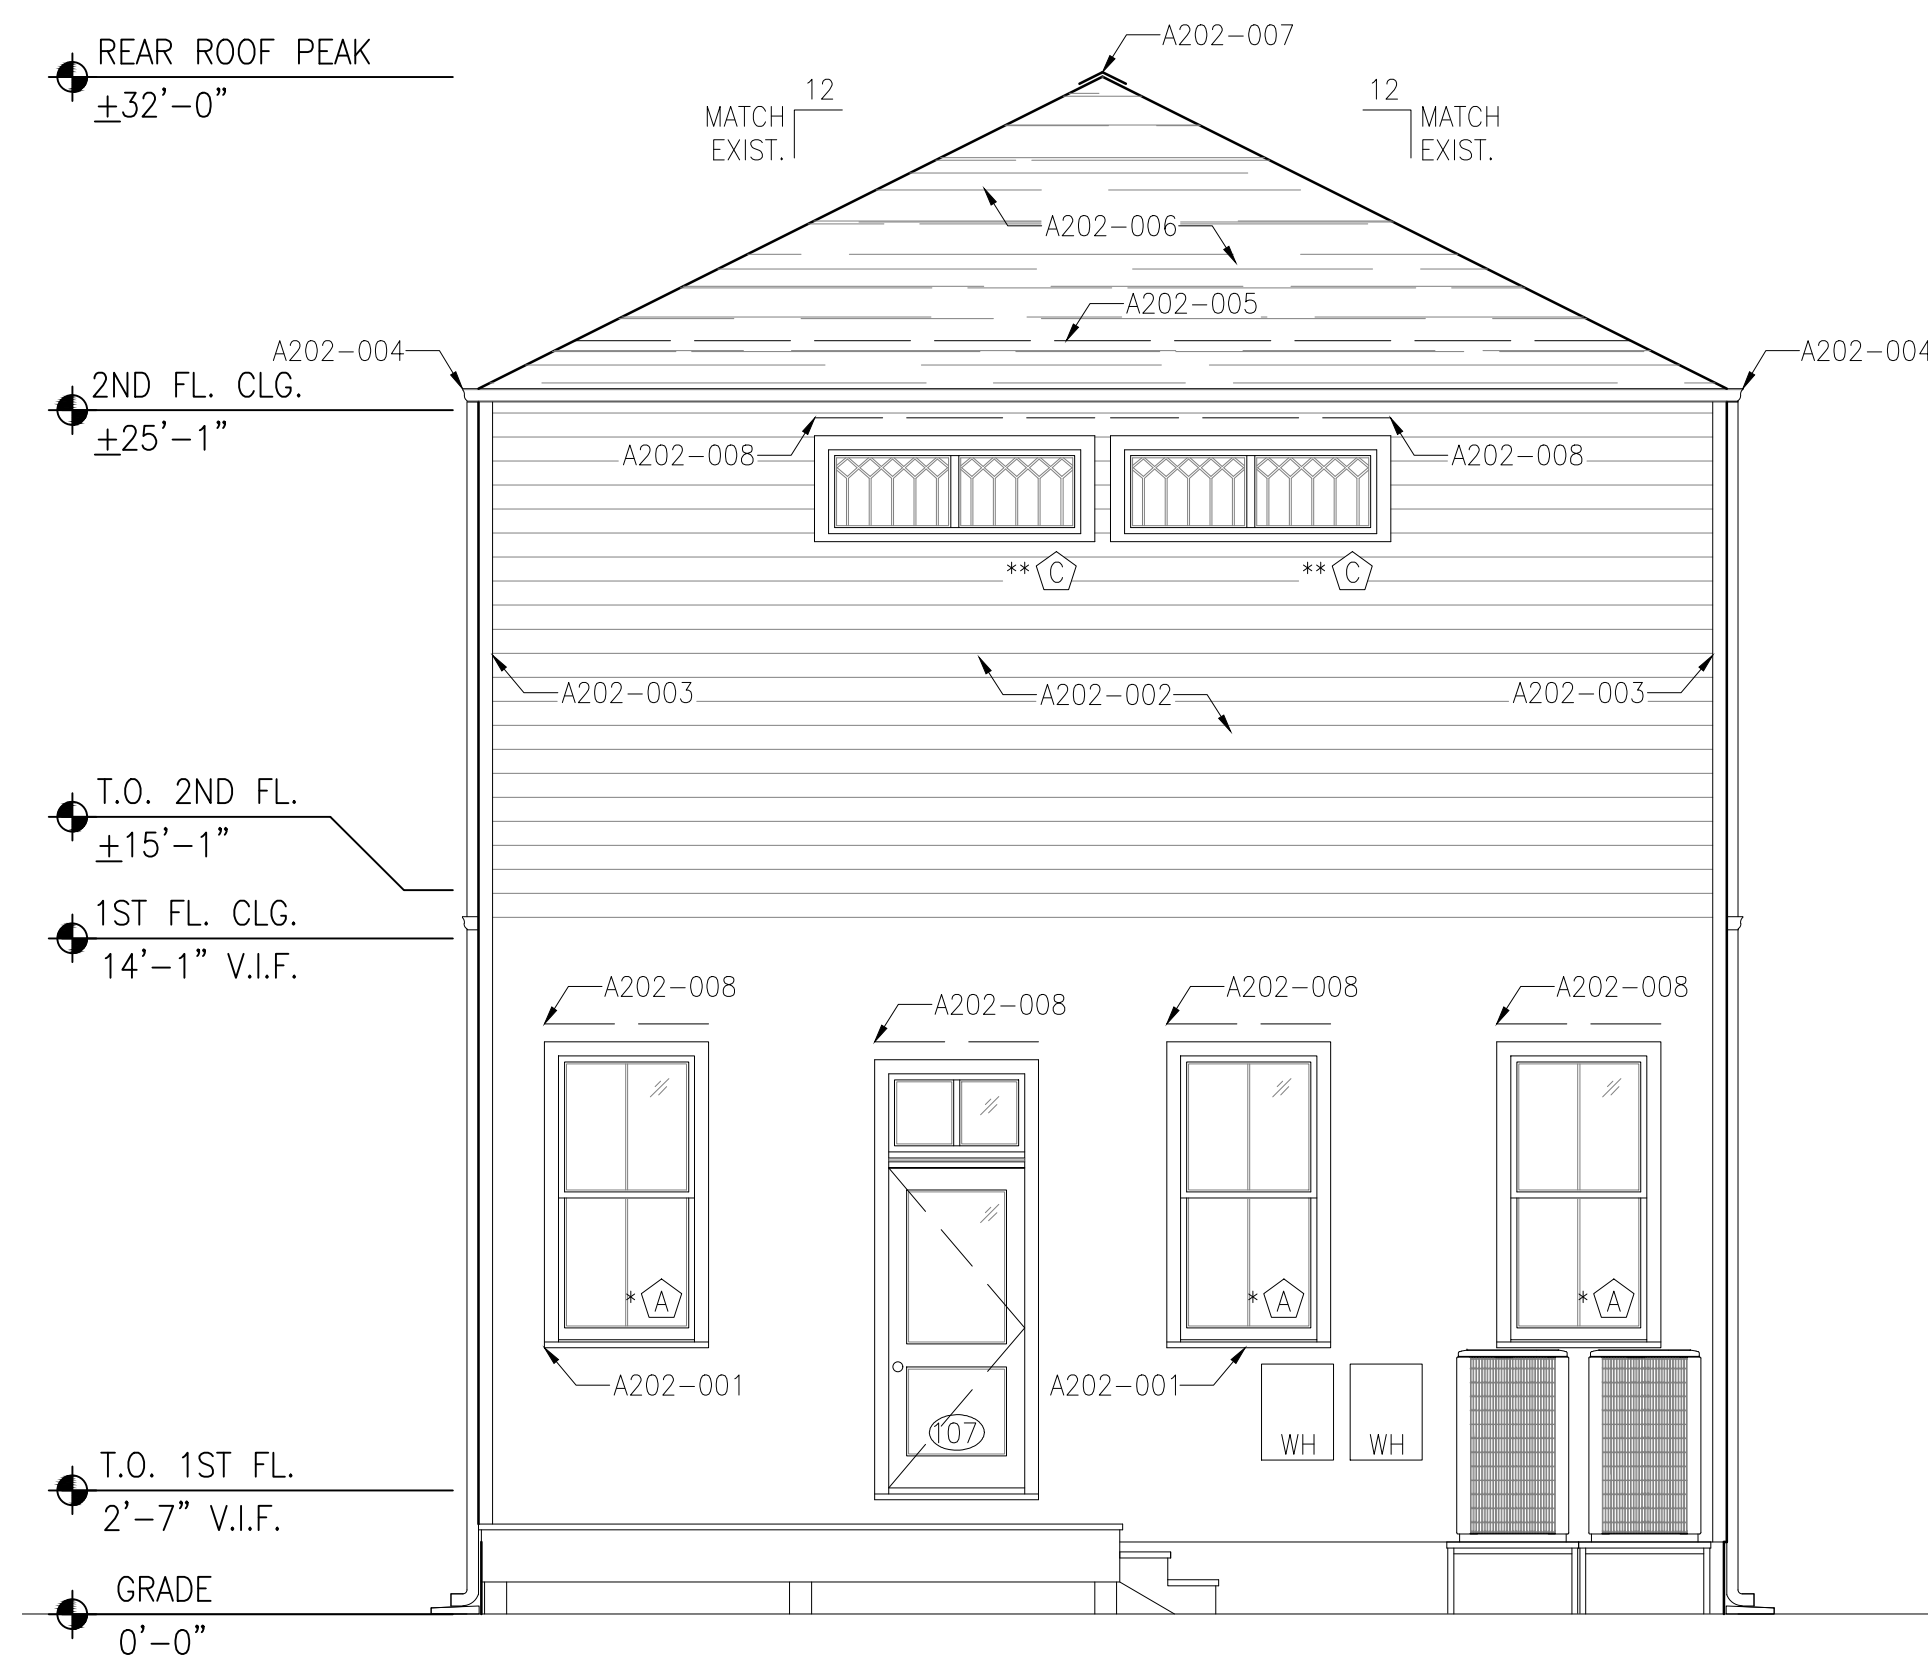

2 PROPOSED REAR ELEVATION
Scale: 1/4"=1'-0"

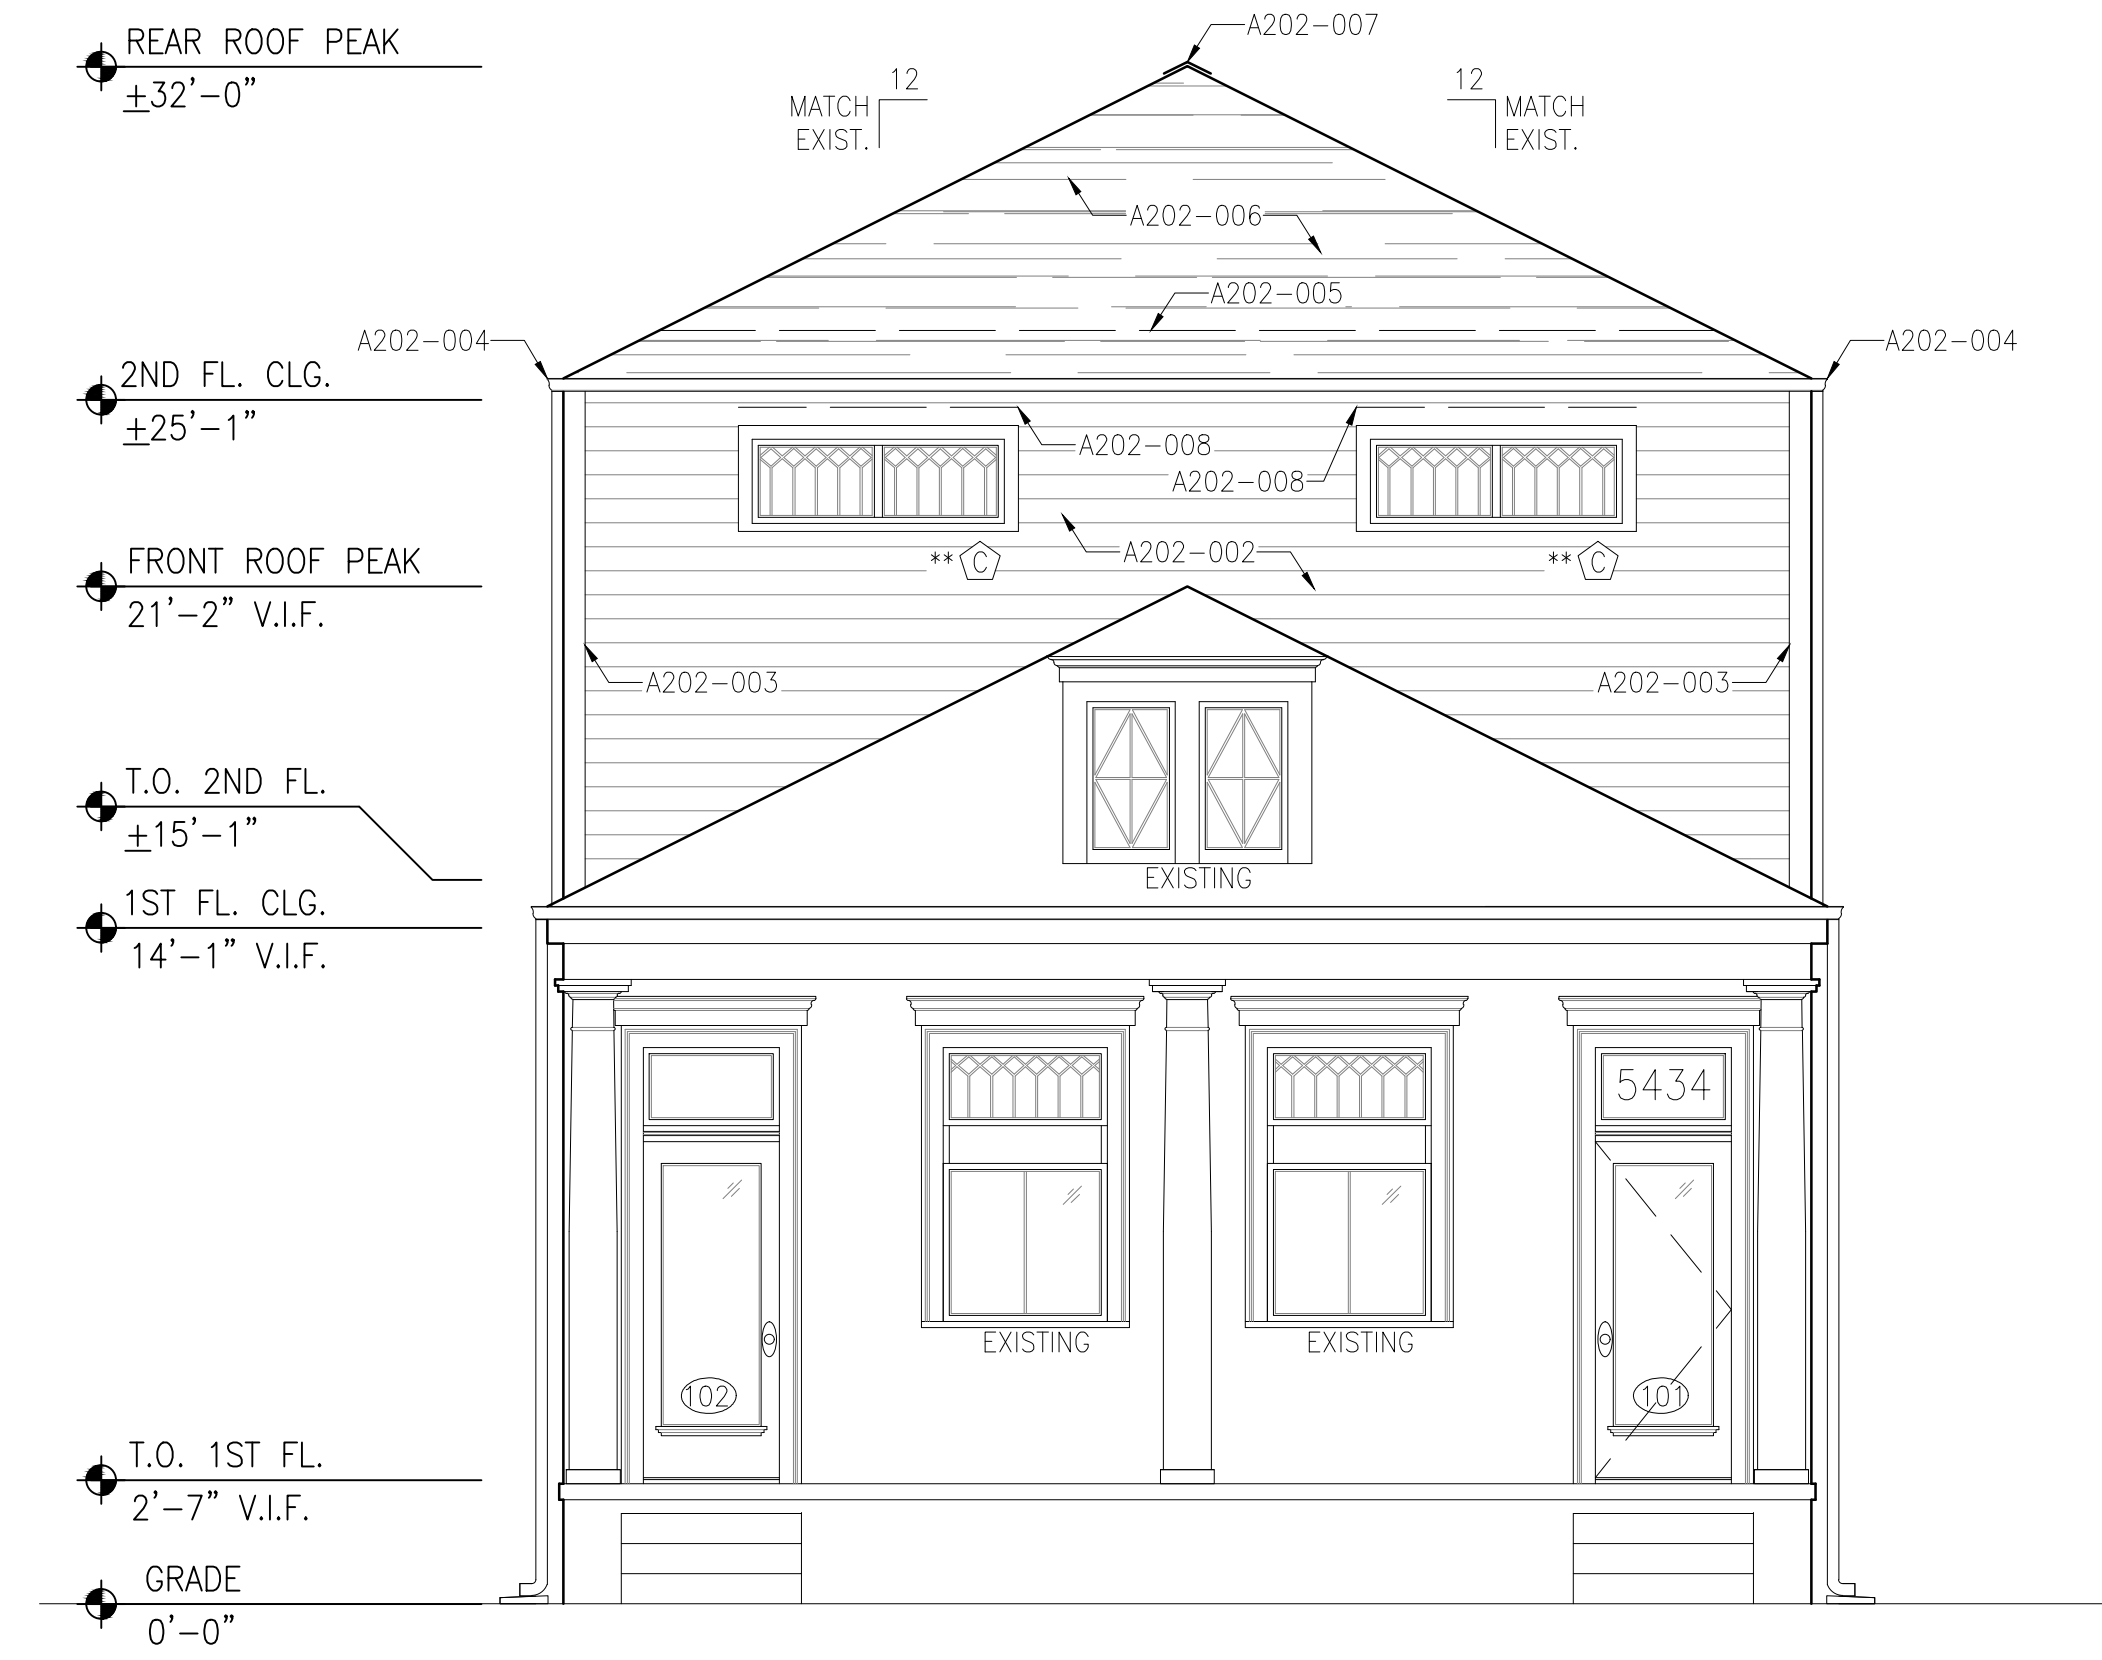


1 PROPOSED FRONT ELEVATION
Scale: 1/4"=1'-0"

KEY NOTES	
TAG	DESCRIPTION
A202-001	NEW WINDOW TO MATCH EXISTING WOOD SINGLE-PANE WINDOWS.
A202-002	NEW SIDING TO MATCH EXISTING. AT INFILL AREAS, LAP SIDING TO BLEND.
A202-003	CORNER TRIM.
A202-004	GUTTER & DOWNSPOUT.
A202-005	PROVIDE FLASHING 12" UP AT ALL ROOF EDGES.
A202-006	NEW SHINGLES TO MATCH EXISTING.
A202-007	PROVIDE RIDGE VENT AT NEW ROOF.
A202-008	PROVIDE FLASHING 6" ABOVE NEW WINDOWS & DOORS.

DOB STAMP

NO.	REVISIONS/SUBMISSIONS	DATE
	FOR PERMIT	07/28/22
DRAWN BY: KJ		

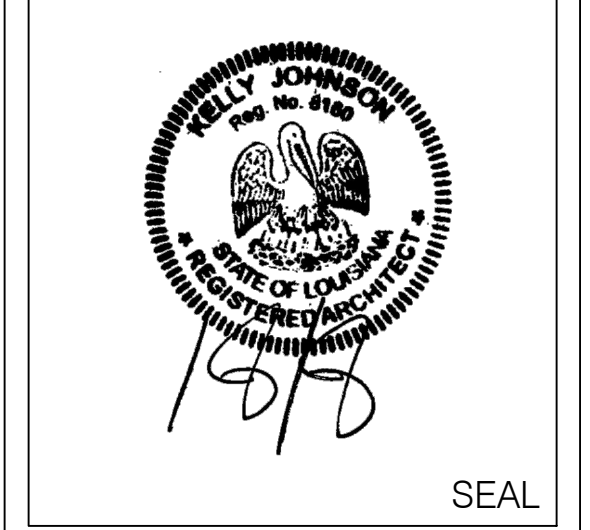

ENGINEER

LOCATION:
PRIVATE RESIDENCE
 5430 LAUREL STREET
 NEW ORLEANS, LA 70115

DRAWING TITLE:
PROPOSED ELEVATIONS

PROJECT:
22-R-09


FOR PERMIT

A202
 SHEET

KK JOHNSON ARCHITECTURE & DESIGN
 4618 Camp Street, New Orleans, LA 70115
 p: 504.327.9717 e: kjohnson@kjohnsonarchitecture.com

KK ARCHITECTURE
 & Design

NOTE: CONTRACTOR TO HIRE STRUCTURAL ENGINEER TO EXAMINE EXISTING FOUNDATION & DETERMINE IF FOUNDATION WORK IS REQUIRED TO SUPPORT NEW SECOND STORY.

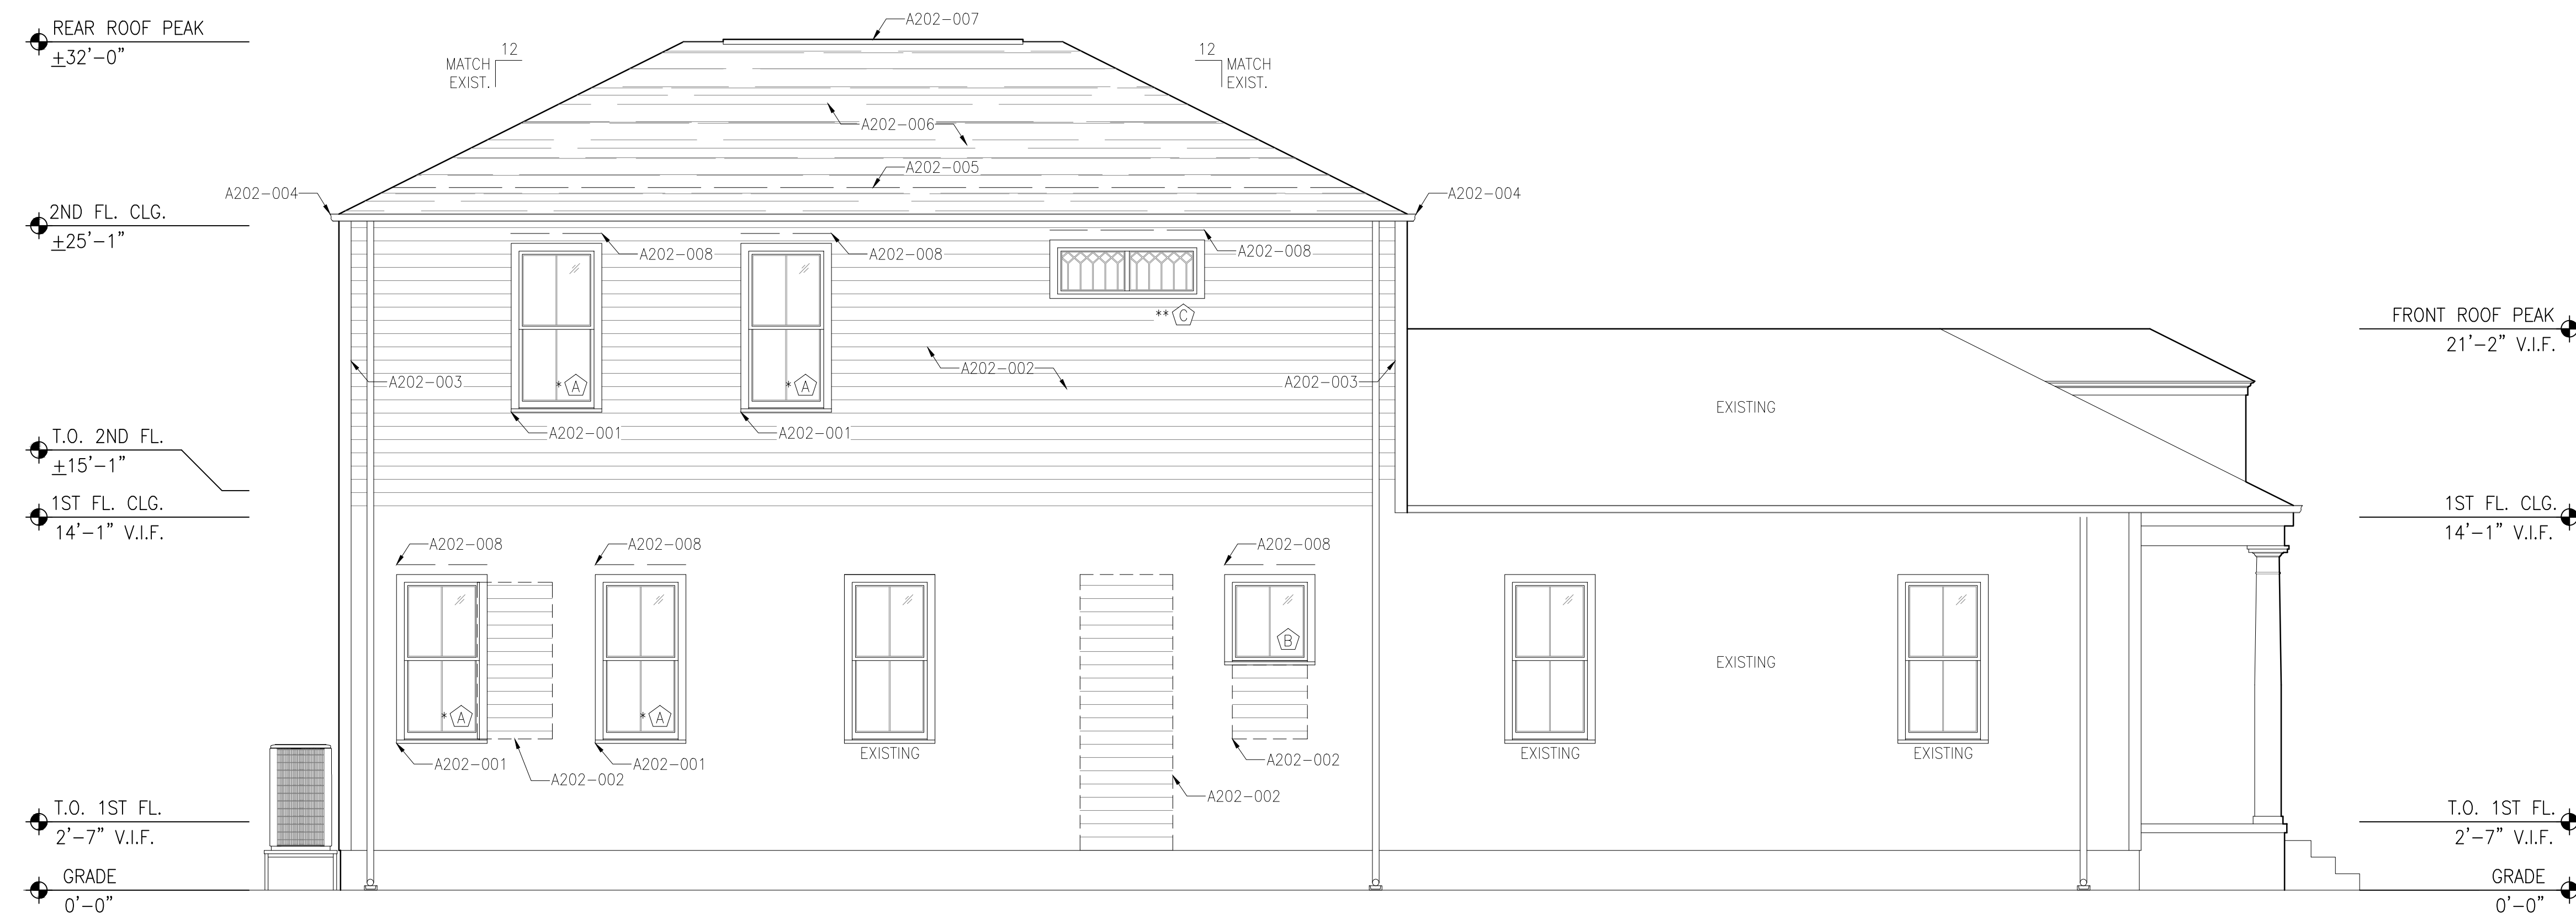

1 PROPOSED SIDE ELEVATION

Scale: 1/4"=1'-0"

PLAN NOTES

- NEW WALLS ARE SHOWN AS 4" WIDE (2x4 STUD WITH 1/2" GYPSUM BOARD EACH SIDE). DIMENSIONS ARE TO FACE OF FINISH UNLESS NOTED OTHERWISE.
- NEW PLUMBING WALLS ARE SHOWN AS 6" WIDE (2x6 STUD WITH 1/2" GYPSUM BOARD OR FIBER CEMENT BOARD IN AREAS THAT ARE TO BE TILED).
- DIMENSIONS OF EXISTING CONDITIONS ARE FOR REFERENCE ONLY. ALL EXISTING DIMENSIONS TO BE FIELD VERIFIED PRIOR TO START OF CONSTRUCTION.
- PROVIDE SMOKE DETECTORS IN ALL SLEEPING AREAS AS REQUIRED BY SECTION R314 IRC 2015 ed.
- PROVIDE A COMBINATION SMOKE DETECTOR/CARBON MONOXIDE MONITOR IN HALLWAY OUTSIDE OF SLEEPING AREAS AS PER SECTION R315 IRC 2015 ed.
- BATHROOMS AND KITCHEN HOODS WILL BE VENTILATED DIRECTLY TO THE OUTDOORS. VENTILATION EQUIPMENT IN BATHROOMS MUST BE INSTALLED IN ACCORDANCE WITH SECTION 1507 OF THE IRC 2015 ED.
- ANY ROTTED OR DAMAGED STUDS DISCOVERED IN THE EXISTING HOUSE DURING RENOVATION SHALL BE REPLACED.
- ANY DAMAGED OR SAGGING FLOOR JOISTS DISCOVERED IN THE EXISTING HOUSE DURING RENOVATION SHALL BE REPLACED OR CORRECTED BY SISTERING.
- HOUSE IS TO BE FULLY INSULATED AS FOLLOWS: R-19 INSULATION IN WALLS, R-13 INSULATION IN FLOOR, R-30 INSULATION IN ATTIC AS REQUIRED BY SECTION 1102 OF IRC 2015 ed.
- ATTIC TO BE VENTILATED AS REQUIRED BY SECTION R806 OF IRC 2015 ed.
- IN COMPLIANCE WITH R311.7.7 IRC 2015 ed., HANDRAILS SHALL BE 34" MINIMUM IN HEIGHT, MEASURED FROM TREAD NOSING, AND TOP RAIL SHALL BE 1 1/2" IN DIAMETER.
- IN COMPLIANCE WITH R312 IRC 2015 ed., GUARDRAILS SHALL BE PROVIDED ALONG OPEN-SIDED WALKING SURFACES, INCLUDING STAIRS, RAMPS AND LANDINGS, THAT ARE MORE THAN 30" ABOVE GRADE. GUARDRAILS SHALL BE 36" MINIMUM IN HEIGHT AND GUARD OPENINGS SHALL NOT ALLOW PASSAGE FOR A 4" SPHERE.
- FOR ANY NEW OR RECONSTRUCTED STAIR, THE MINIMUM STAIR TREAD DEPTH SHALL BE 10" AND MAXIMUM RISER HEIGHT SHALL BE 7 1/2" IN ACCORDANCE WITH R311.7.4 IRC 2015 ed.
- NEW ADDITION AND DECK AT REAR OF HOUSE SHALL BE BUILT WITH DIMENSIONAL LUMBER AND SIMPSON STRONG-TIE H SERIES HANGERS AND ASSEMBLY SHALL RESIST 130 MPH WIND LOADS.
- ALL ROOFING COMPONENTS/MATERIALS SHALL BE INSTALLED ACCORDING TO THE MANUFACTURERS INSTRUCTIONS.
- SEE MECHANICAL & ELECTRICAL DRAWINGS FOR ROOF PENETRATION LOCATIONS.

WINDOW/DOOR NOTES

- ALL GLAZING TO BE PROTECTED FROM WIND-BORNE DEBRIS BY EITHER PLYWOOD PANELS, CUT TO FIT AND STORED UNDER THE HOUSE, OR SHUTTERS IN ACCORDANCE WITH R301.2.1.2 IRC 2015 ed.
- ALL OPERABLE WINDOWS & DOORS TO HAVE FULL-SIZE SCREENS. HALF SCREENS ARE NOT ALLOWED.
- PER IRC 2015 ED, EVERY SLEEPING ROOM SHALL HAVE AT LEAST ONE OPERABLE WINDOW OR EXTERIOR DOOR APPROVED FOR EMERGENCY EGRESS OR RESCUE. UNITS MUST BE OPERABLE FROM THE INSIDE TO FULL CLEAR OPENING WITHOUT THE USE OF SEPARATE TOOLS AND SHALL HAVE SILL HEIGHT OF NOT MORE THAN 44" ABOVE THE FLOOR. ALL EGRESS WINDOWS FROM SLEEPING ROOMS MUST HAVE A MINIMUM NET CLEAR OPENING OF 5.7 SQUARE FEET WITH MINIMUM NET CLEAR HEIGHT OF 24" AND MINIMUM NET CLEAR WIDTH OF 20".
- ANY NEW DOORS TO BE SOLID-CORE WOOD TO MATCH EXISTING, STYLE APPROVED BY OWNER.
- TYPICAL WINDOW AND DOOR CASING TO MATCH EXISTING & BE WOOD ON EXTERIOR.
- ALL DOOR HINGES TO MATCH IN FINISH AND STYLE.
- SHUTTERS (IF ANY) TO BE PAINTED WOOD (EITHER PRESSURE TREATED OR SPANISH CEDAR, BOARD AND BATTEN, WITH GALVANIZED HARDWARE FOR CLOSING AND FOR STAYING CONNECTED TO THE HOUSE WHEN OPEN.

ROOM FINISH SCHEDULE

ROOM NO.	ROOM NAME	FLOORS	BASE	WALLS	CEILINGS	MOLDING TRIM	REMARKS
FIRST FLOOR							
101	ENTRY	HARDWOOD	WOOD	PAINTED GYP. BD	PAINTED GYP. BD	WOOD	CEILING HEIGHT - 11'-6"(EXISTING)
102	LIVING AREA	HARDWOOD	WOOD	PAINTED GYP. BD	PAINTED GYP. BD	WOOD	CEILING HEIGHT - 11'-6"(EXISTING)
103	DINING AREA	HARDWOOD	WOOD	PAINTED GYP. BD	PAINTED GYP. BD	WOOD	CEILING HEIGHT - 11'-6"(EXISTING)
104	KITCHEN	HARDWOOD	WOOD	PAINTED W.R. GYP. BD	PAINTED W.R. GYP. BD	WOOD	CEILING HEIGHT - 11'-6"(EXISTING)
105	PANTRY	HARDWOOD	WOOD	PAINTED GYP. BD	PAINTED GYP. BD	WOOD	CEILING HEIGHT - 11'-6"(EXISTING)
106	1/2 BATH	HARDWOOD	WOOD	PAINTED GYP. BD	PAINTED GYP. BD	WOOD	CEILING HEIGHT - 11'-6"(EXISTING)
107	CLOSET	HARDWOOD	WOOD	PAINTED GYP. BD	PAINTED GYP. BD	WOOD	CEILING HEIGHT - 11'-6"(EXISTING)
108	CLOSET	HARDWOOD	WOOD	PAINTED GYP. BD	PAINTED GYP. BD	WOOD	CEILING HEIGHT - 11'-6"(EXISTING)
109	FAMILY ROOM	HARDWOOD	WOOD	PAINTED GYP. BD	PAINTED GYP. BD	WOOD	CEILING HEIGHT - 11'-6"(EXISTING)
110	GUEST BATH	TILE	WOOD	PAINTED W.R. GYP. BD	PAINTED W.R. GYP. BD	WOOD	CEILING HEIGHT - 11'-6"(EXISTING)
111	WALK-IN CLOSET	HARDWOOD	WOOD	PAINTED GYP. BD	PAINTED GYP. BD	WOOD	CEILING HEIGHT - 11'-6"(EXISTING)
112	GUEST BEDROOM	HARDWOOD	WOOD	PAINTED GYP. BD	PAINTED GYP. BD	WOOD	CEILING HEIGHT - 11'-6"(EXISTING)
SECOND FLOOR							
201	PRIMARY BEDROOM	HARDWOOD	WOOD	PAINTED GYP. BD	PTD. GYP. BD	WOOD	CEILING HEIGHT - 10'-0"
202	PRIMARY BATHROOM	HARDWOOD	WOOD	PAINTED GYP. BD	PTD. GYP. BD	WOOD	CEILING HEIGHT - 10'-0"
203	W.I.C.	HARDWOOD	WOOD	PAINTED GYP. BD	PTD. GYP. BD	WOOD	CEILING HEIGHT - 10'-0"
204	HALLWAY	HARDWOOD	WOOD	PAINTED GYP. BD	PTD. GYP. BD	WOOD	CEILING HEIGHT - 10'-0"
205	LAUNDRY	HARDWOOD/TILE	WOOD	PAINTED W.R. GYP. BD	PAINTED W.R. GYP. BD	WOOD	CEILING HEIGHT - 10'-0"
206	BEDROOM	TILE	WOOD	PAINTED W.R. GYP. BD	PAINTED W.R. GYP. BD	WOOD	CEILING HEIGHT - 10'-0"
207	W.I.C.	HARDWOOD	WOOD	PAINTED GYP. BD	PTD. GYP. BD	WOOD	CEILING HEIGHT - 10'-0"
208	BATHROOM	HARDWOOD	WOOD	PAINTED GYP. BD	PTD. GYP. BD	WOOD	CEILING HEIGHT - 10'-0"
209	BEDROOM	TILE	WOOD	PAINTED W.R. GYP. BD	PAINTED W.R. GYP. BD	WOOD	CEILING HEIGHT - 10'-0"
210	W.I.C.	HARDWOOD	WOOD	PAINTED GYP. BD	PTD. GYP. BD	WOOD	CEILING HEIGHT - 10'-0"
211	BATHROOM	HARDWOOD	WOOD	PAINTED GYP. BD	PTD. GYP. BD	WOOD	CEILING HEIGHT - 10'-0"

NOTE: ALL WALL AND CEILING FINISHES TO BE CLASS 1, FLAME SPREAD RATING OF 0 TO 25, SMOKE DEVELOPED 200 OR LESS. ALL FLOOR COVERINGS TO BE CLASS A, CRITICAL RADIANT FLUX OF 0.45 WATTS/SQ. CM. OR HIGHER.
NOTE: MATERIALS/FINISHES SHOWN IN THIS SCHEDULE ARE GENERAL. OWNER TO SELECT FINAL MATERIALS.

WINDOW SCHEDULE

MARK	SIZE (WxH)	HEAD HEIGHT	DESCRIPTION	COUNT
*A	2'-10"x6'-0"	MATCH EXISTING	NEW OR RELOCATED WOOD SINGLE PANE 2/2 WINDOW TO MATCH EXIST.	12
B	2'-10"x3'-0"	MATCH EXISTING	NEW WOOD SINGLE PANE DIVIDED FIXED WINDOW	1
**C	5'-0"x1'-6"	9'-0"	NEW WOOD TRANSOM WINDOW	5

* MEETS EGRESS REQUIREMENTS, PER SECTION R310 OF IRC 2015 ed.
** GLAZING IS GREATER THAN 60" AFF.


DOOR SCHEDULE

DOOR #	DOOR SIZE(WxH)	DESCRIPTION	FINISH	FRAMING			HRD.WARE	REMARKS
				MATERIAL	HEAD & JAMB	FINISH		
101	2'-10"x7'-0"	EXIST. SOLID WOOD W. GLASS	WOOD	WOOD	WOOD	WOOD	EXIST.	KEYED ---
102	2'-10"x7'-0"	EXIST. SOLID WOOD W. GLASS	WOOD	WOOD	WOOD	WOOD	EXIST.	FIXED ---
103	2'-8"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	WOOD	PAINT	LEVER ---
104	2'-8"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	WOOD	PAINT	PRIVACY ---
105	2'-8"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	WOOD	PAINT	LEVER ---
106	2'-8"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	WOOD	PAINT	LEVER ---
107	2'-10"x7'-0"	EXIST. SOLID WOOD W. GLASS	WOOD	WOOD	WOOD	WOOD	PAINT	KEYED ---
108	2'-10"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	WOOD	PAINT	LEVER ---
109	2'-8"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	WOOD	PAINT	PRIVACY ---
110	2'-8"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	WOOD	PAINT	PRIVACY ---
111	(2)2'-6"x6'-8"	WOOD SLIDING DOORS	WOOD	WOOD	WOOD	WOOD	PAINT	PULLS ---
201	2'-8"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	WOOD	PAINT	PRIVACY ---
202	2'-8"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	WOOD	PAINT	LEVER ---
203	2'-8"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	WOOD	PAINT	PRIVACY ---
204	3'-0"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	WOOD	PAINT	LEVER ---
205	2'-8"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	WOOD	PAINT	PRIVACY ---
206	2'-8"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	WOOD	PAINT	PRIVACY ---
207	2'-8"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	WOOD	PAINT	LEVER ---
208	2'-6"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	WOOD	PAINT	PRIVACY ---
209	2'-6"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	WOOD	PAINT	PRIVACY ---
210	2'-6"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	WOOD	PAINT	LEVER ---

DOB STAMP

NO.	REVISIONS/SUBMISSIONS	DATE
	FOR PERMIT	07/28/22

DRAWN BY: KJ

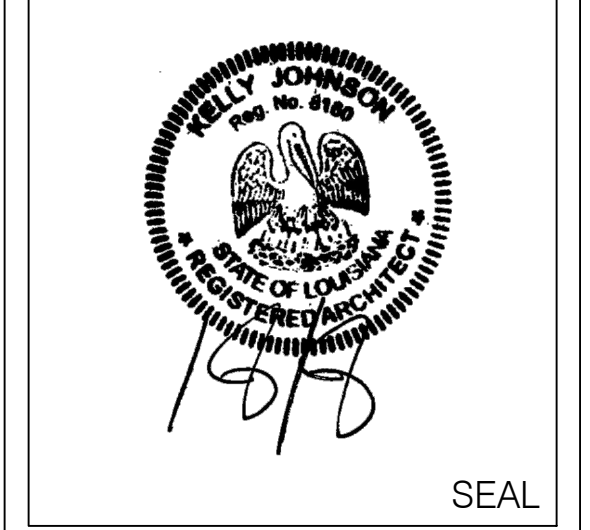

ENGINEER

LOCATION:
PRIVATE RESIDENCE
5430 LAUREL STREET
NEW ORLEANS, LA 70115


DRAWING TITLE:
NOTES & SCHEDULES

PROJECT:
22-R-09

FOR PERMIT

A203
SHEET

KK JOHNSON ARCHITECTURE & DESIGN
4618 Camp Street, New Orleans, LA 70115
e: kjohnson@kjohnsonarchitecture.com
p: 504.327.9717

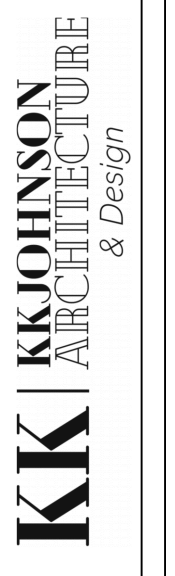

PLAN NOTES

1. ALL NEW OUTLETS TO BE GROUND FAULT INTERRUPTED IN ALL WET LOCATIONS.
2. OWNER TO PROVIDE ALL NEW LIGHTING FIXTURES EXCEPT CANS. VERIFY TYPES AND LOCATIONS WITH OWNER PRIOR TO WIRING AND INSTALLATION.
3. PROVIDE OVERFLOW PANS AT FURNACES & WATER HEATERS W. FLOOR DRAIN. PROVIDE OPEN SITE DRAIN FOR CONDENSATE.
4. PROVIDE DISCONNECT FOR DISHWASHER AND AIR CONDENSER.

ELECTRICAL/LIGHTING NOTES

1. OWNER TO PROVIDE ALL FIXTURES EXCEPT RECESSED CANS.
2. OWNER TO VERIFY LOCATION OF ALL FIXTURES PRIOR TO INSTALLATION.
3. ALL PERMITS AND INSPECTIONS TO BE OBTAINED BY ELECTRICIAN AS REQUIRED BY LOCAL CODES AND NEC.
4. RECEPTACLES IN WET AREAS (BATHROOMS AND KITCHENS) SHALL BE LOCATED IN ACCORDANCE WITH NEC AND SHALL BE GROUND FAULT CIRCUITED (GFI).
5. RECEPTACLES IN BEDROOMS SHALL BE LOCATED IN ACCORDANCE WITH NEC AND SHALL BE ARC-FAULT CIRCUITED (AFI).
6. VERIFY SWITCH AND OUTLET LOCATIONS WITH OWNER PRIOR TO INSTALLATION.

MECHANICAL/PLUMBING NOTES


1. INSTALL NEW BATHROOM DUCTS FOR VENTILATION. ALL VENTILATION EQUIPMENT SHALL BE INSTALLED IN ACCORDANCE WITH SECTION 1307 OF THE IBC 2015.
2. KITCHEN HOODS TO VENT THROUGH ROOF.
3. CONDENSING UNITS TO BE LOCATED ON PLATFORM ABOVE BASE FLOOR ELEVATION.
4. WHOLE-HOUSE GAS ON DEMAND HOT WATER SYSTEM TO BE INSTALLED IN ATTIC. EQUIPMENT SHALL BE 9.5 RUDD OUTDOOR TANKLESS WATER HEATER OR APPROVED EQUAL.
5. ANY PLUMBING PIPES UNDER HOUSE OR OUTSIDE OF CONDITIONED SPACE TO BE INSULATED R-4 MINIMUM.

SYMBOLS KEY



- ⊙ 4" RECESSED CAN LIGHT FIXTURE
- ⊕ W/ DAYLIGHT LED LIGHTS
- ⊕ DECORATIVE CEILING MOUNT FIXTURE
- ⊕ DECORATIVE WALL MOUNT FIXTURE
- ⊕ VENT LIGHT
- LED STRIP
- ⊕ LIGHT SWITCH
- ⊕ THREE-WAY LIGHT SWITCH
- ⊕ SMOKE DETECTOR
- ⊕ OUTLET
- ⊕ OUTLET, COUNTER HEIGHT
- ⊕ OUTLET, WET LOCATION
- ⊕ GFCI
- ⊕ CEILING FAN
- ⊕ DISCONNECT
- ⊕ THERMOSTAT
- ⊕ HOSE BIB
- ⊕ CARBON MONOXIDE/ SMOKE DETECTOR

KEYED NOTES


1. PROVIDE POWER AND DISCONNECT FOR ALL BATHROOM EXHAUST FANS. VENT BATHROOM EXHAUST THROUGH ROOF.
2. VERIFY WATER HEATER LOCATION WITH PLUMBING CONTRACTOR.
3. VENT DRYER THROUGH ROOF.
4. PROVIDE OVERFLOW PAN AND F.D. FOR WASHER.
5. PROVIDE POWER AND DISCONNECT FOR DISHWASHER.
6. NOT USED.
7. VERIFY LOCATION AND HEIGHT OF TV CONNECTIONS WITH OWNER.
8. VERIFY NEW FURNACE UNIT SIZE AND LOCATION WITH HVAC CONTRACTOR. PROVIDE POWER AND DISCONNECT FOR FURNACE.

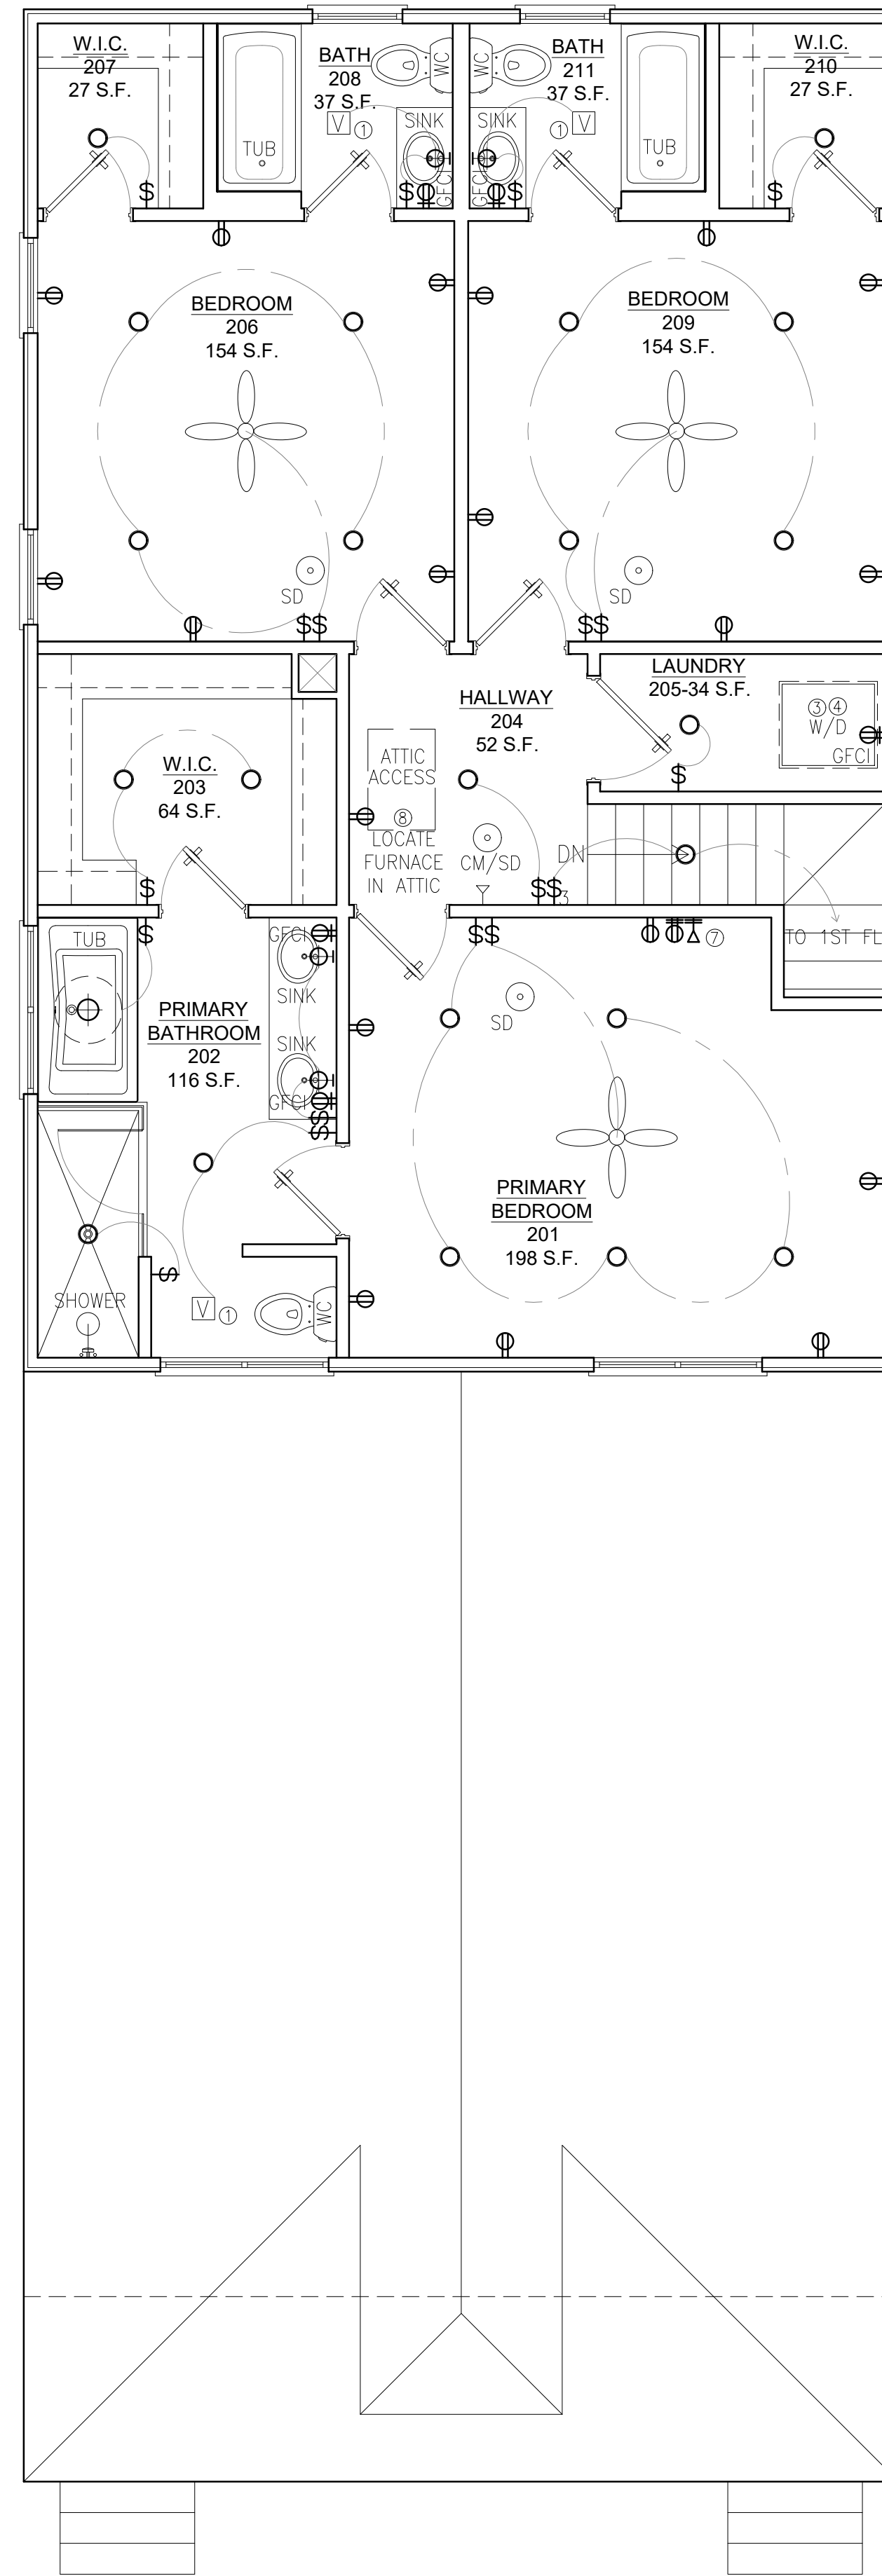

2 PROPOSED 2ND FLOOR PLAN

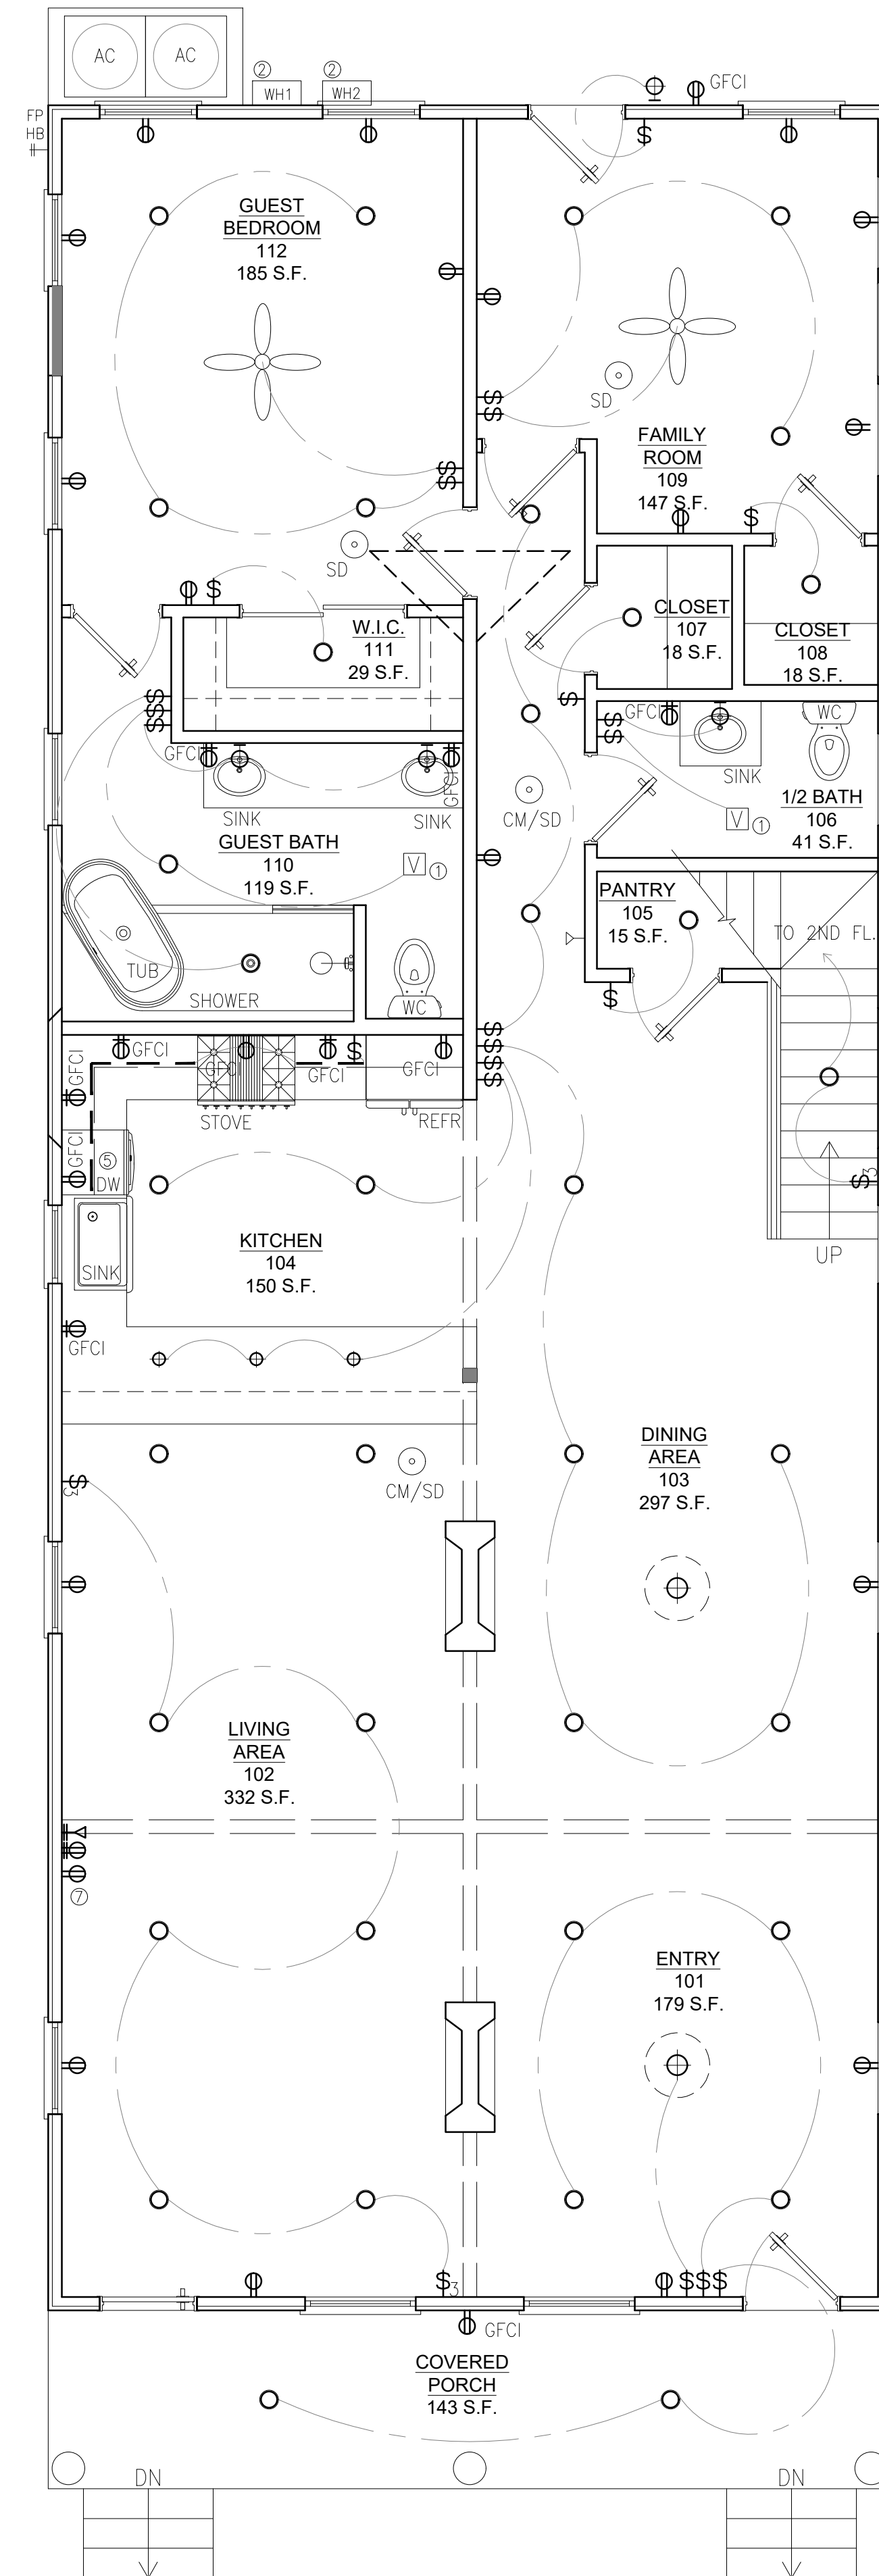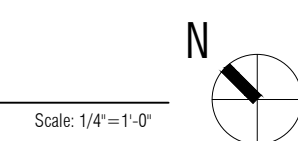


1 PROPOSED 1ST FLOOR PLAN

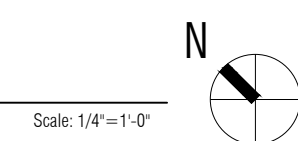

DOB STAMP

NO.	REVISIONS/SUBMISSIONS	DATE
	FOR PERMIT	07/28/22

DRAWN BY: KJ

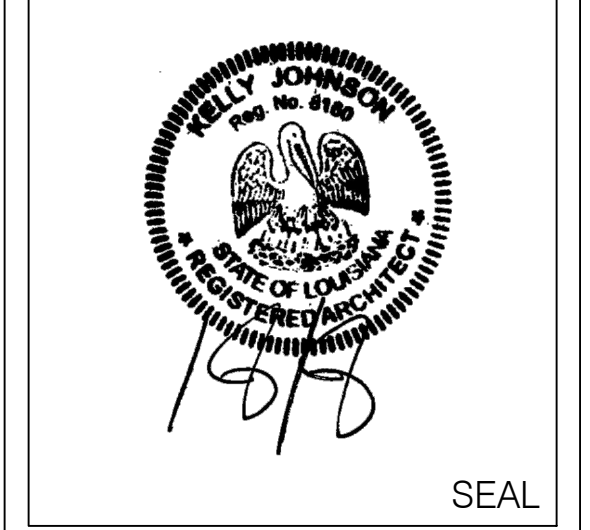

ENGINEER

LOCATION:
PRIVATE RESIDENCE
 5430 LAUREL STREET
 NEW ORLEANS, LA 70115

DRAWING TITLE:
LIGHTING & ELECTRICAL PLAN

PROJECT:
22-R-09

FOR PERMIT

A301
 SHEET

KKJOHNSON ARCHITECTURE & DESIGN
 4618 Camp Street, New Orleans, LA 70115
 p: 504.327.9717 e: kjohnson@kjohnsonarchitecture.com



DOB STAMP

NO.	REVISIONS/SUBMISSIONS	DATE
	FOR PERMIT	07/28/22

DRAWN BY: KJ




SEAL

ENGINEER


PLUMBING ABBREVIATIONS	
DW	DISHWASHER
ICE	ICE MAKER
LAV	LAVATORY SINK
REFR	REFRIGERATOR
SHWR	SHOWER
SINK	KITCHEN SINK
TUB	TUB/SHOWER
WC	WATER CLOSET
WD	WASHER/DRYER
WH	WATER HEATER
HB	FIRE PROOF HOSE BIB

KEYNOTE LEGEND	
A302-B001	CONNECT TO SEWER PIPE.
A302-B002	PROPOSED HOT WATER HEATER; PROVIDE THERMAL TRAP.
A302-B003	RELIEF VALVE.
A302-B004	CONNECT TO EXISTING DOMESTIC WATER SERVICE; CONTRACTOR TO V.I.F.
A302-B005	SHUT-OFF VALVE

APPROVED
maevans , 8/12/2022 ,10:57:31 AM

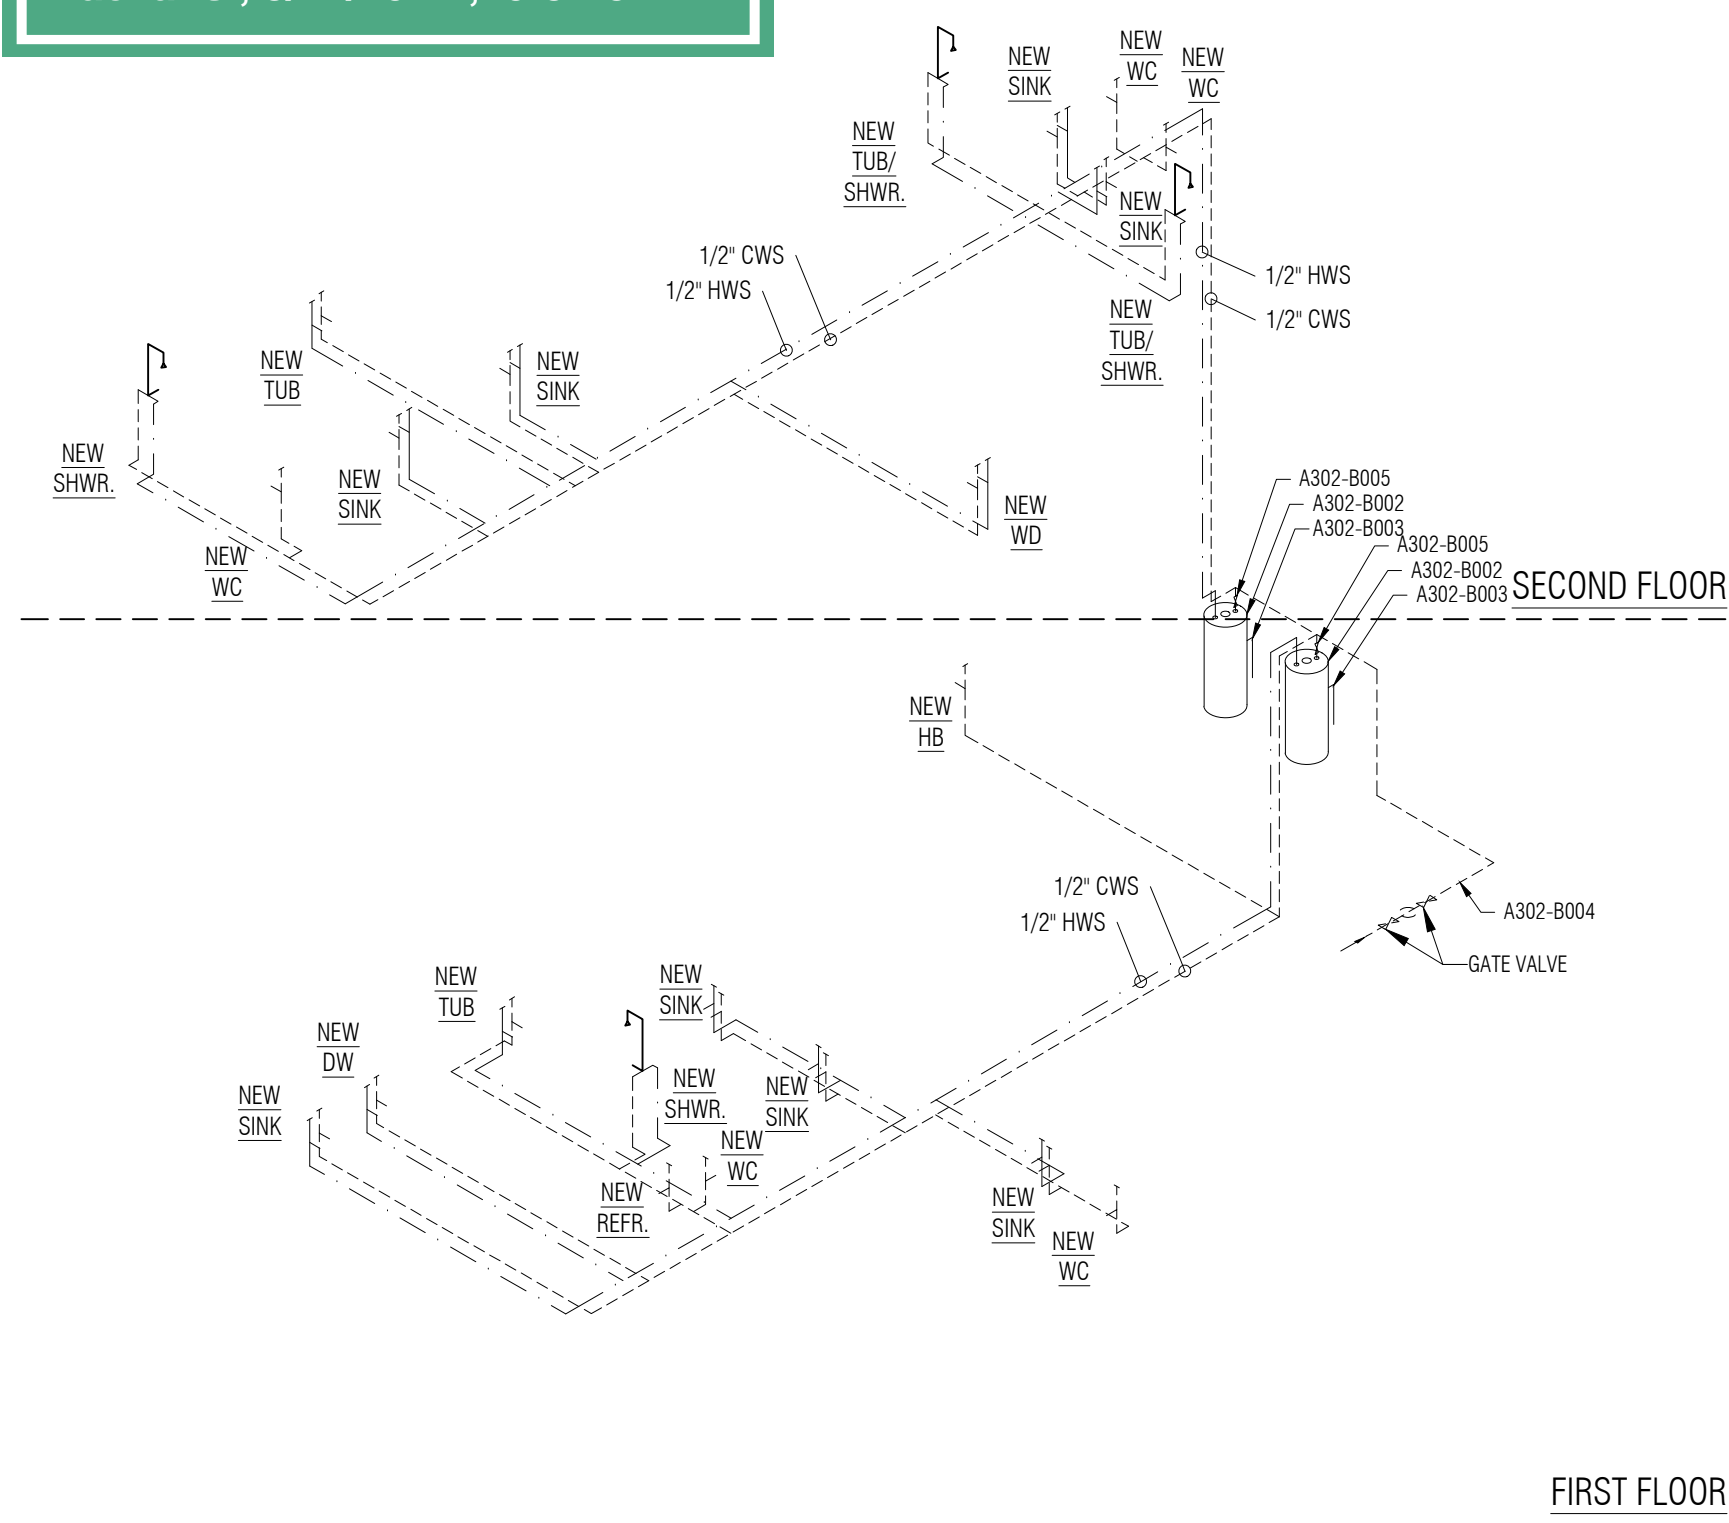

2 SUPPLY PIPE DIAGRAM
NOT TO SCALE

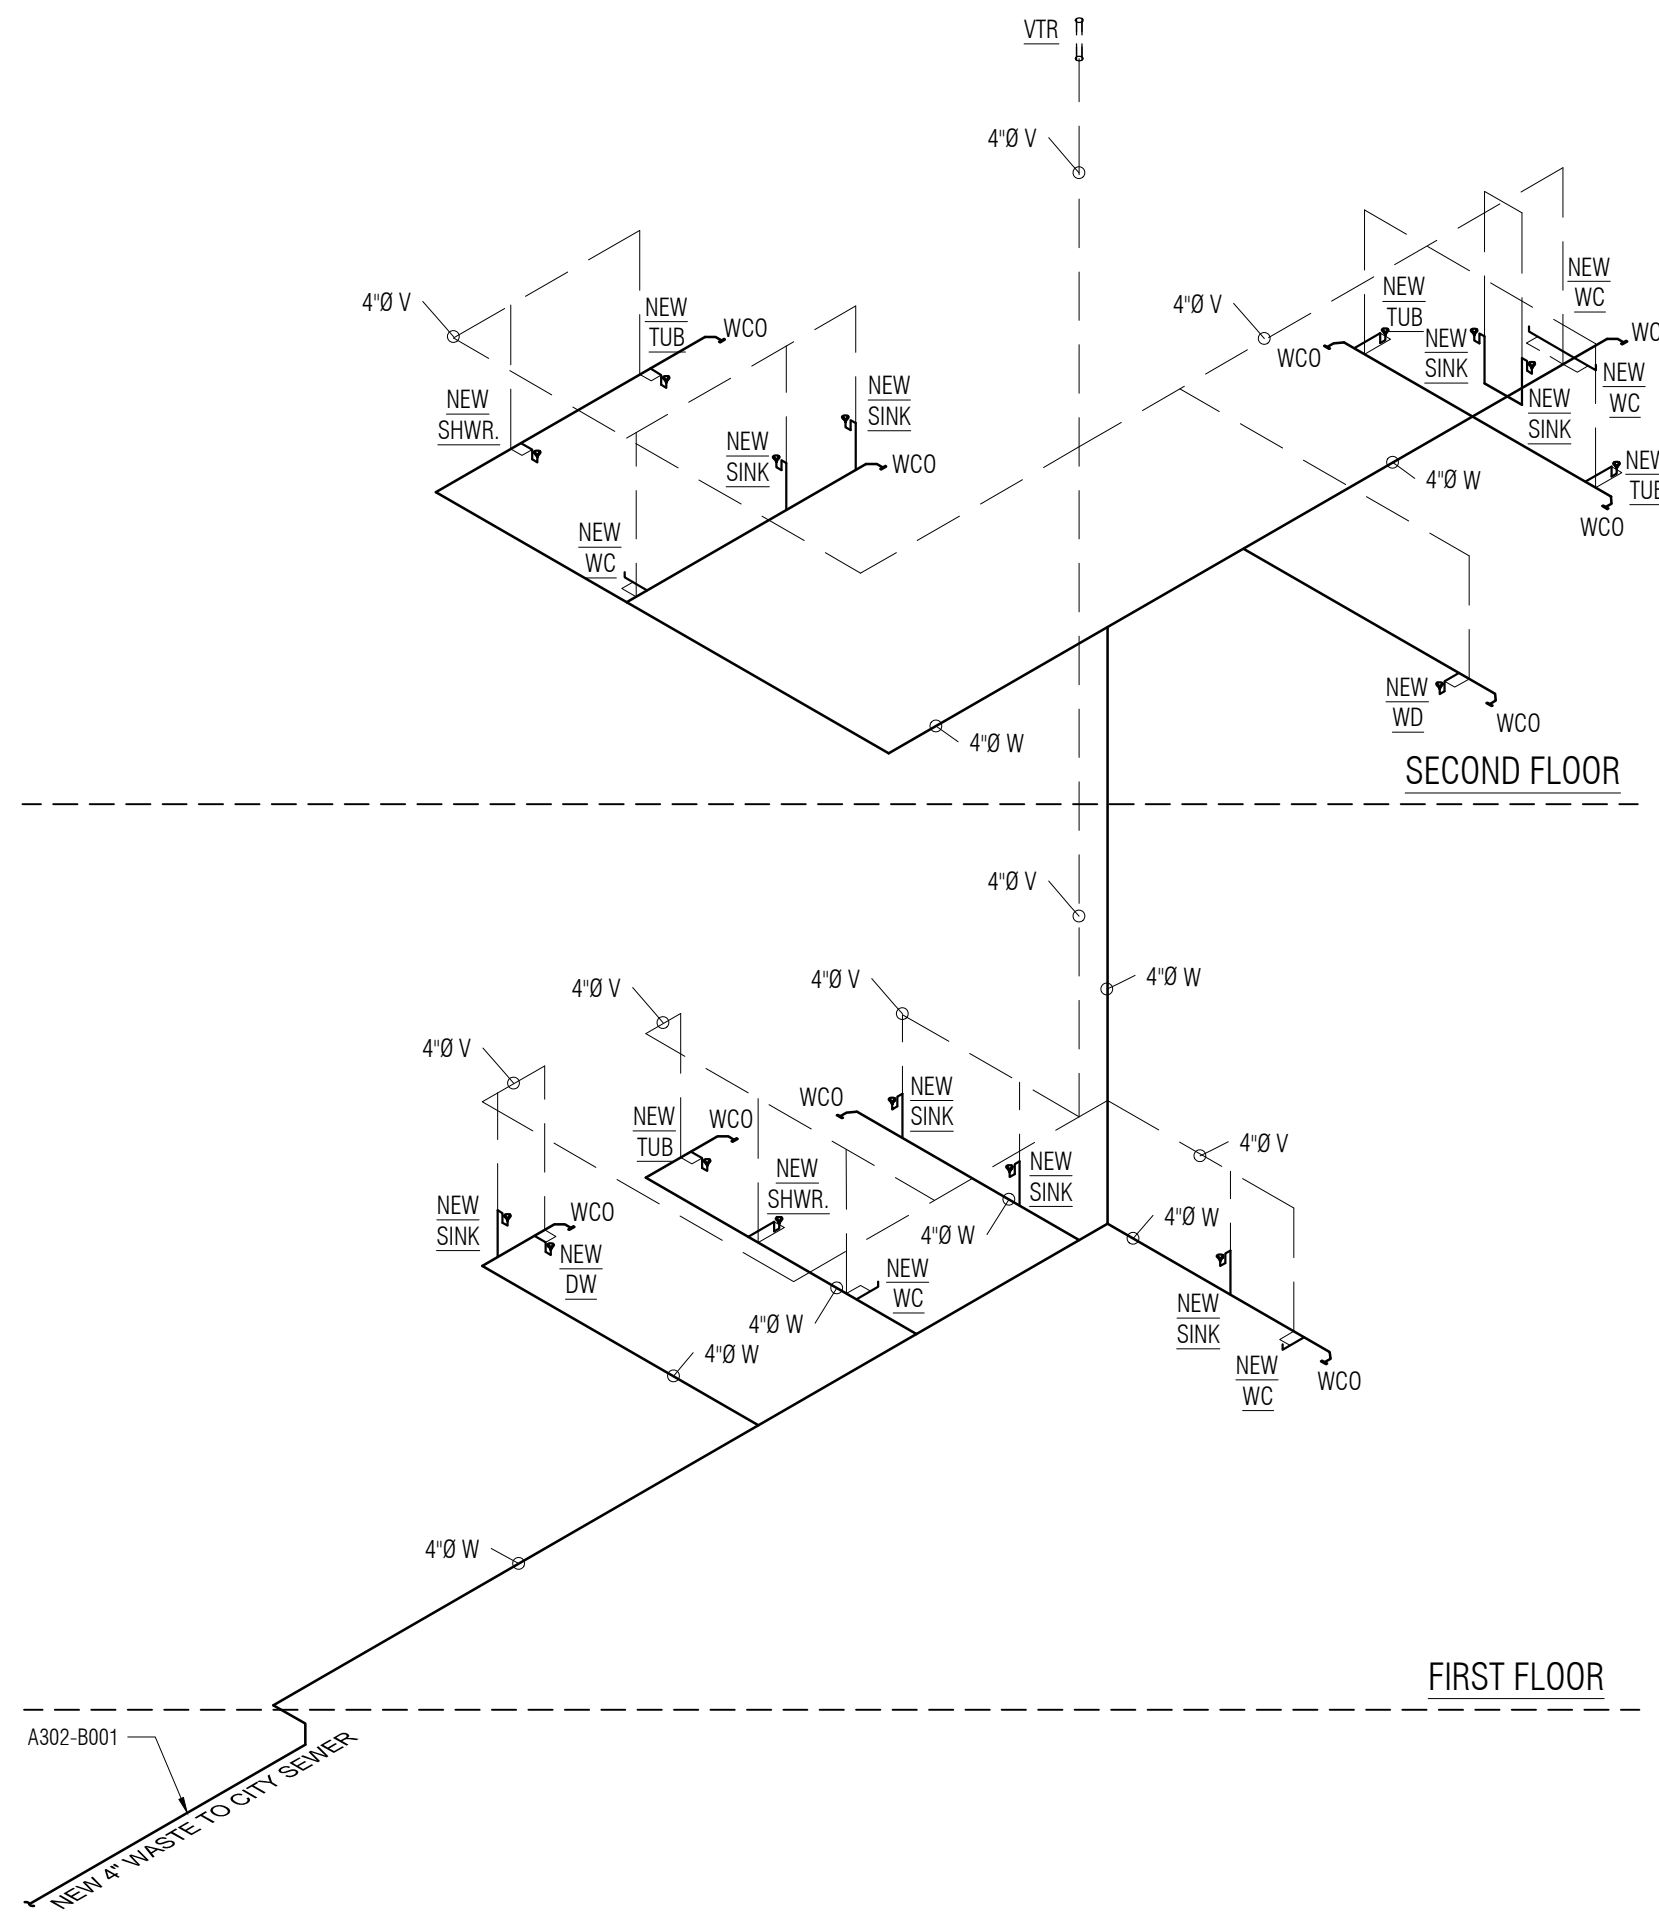

1 WASTE PIPE DIAGRAM
NOT TO SCALE

LOCATION:
PRIVATE RESIDENCE
5430 LAUREL STREET
NEW ORLEANS, LA 70115

KKJOHNSON ARCHITECTURE & DESIGN
4618 Camp Street, New Orleans, LA 70115
p: 504.327.9717 e: kjohnson@kjohnsonarchitecture.com

DRAWING TITLE:
PLUMBING RISER DIAGRAMS



PROJECT:
22-R-09

FOR PERMIT

A302
SHEET