







PERMEABILITY REQUIREMENTS:

MINIMUM LOT PERMEABILITY:	30% OF LOT
LOT AREA:	31' x 98' = 3,038 S.F.
30% OF LOT:	3,038 S.F. x 0.3 = 911 S.F.
FRONT YARD PERMEABLE SURFACE:	125 S.F.
SIDE YARD 1 PERMEABLE SURFACE:	346 S.F.
REAR YARD PERMEABLE SURFACE:	448 S.F.
SIDE YARD 2 PERMEABLE SURFACE:	0 S.F.
TOTAL LOT PERMEABLE SURFACE:	919 S.F.
919 S.F. > 911 S.F. REQUIRED	

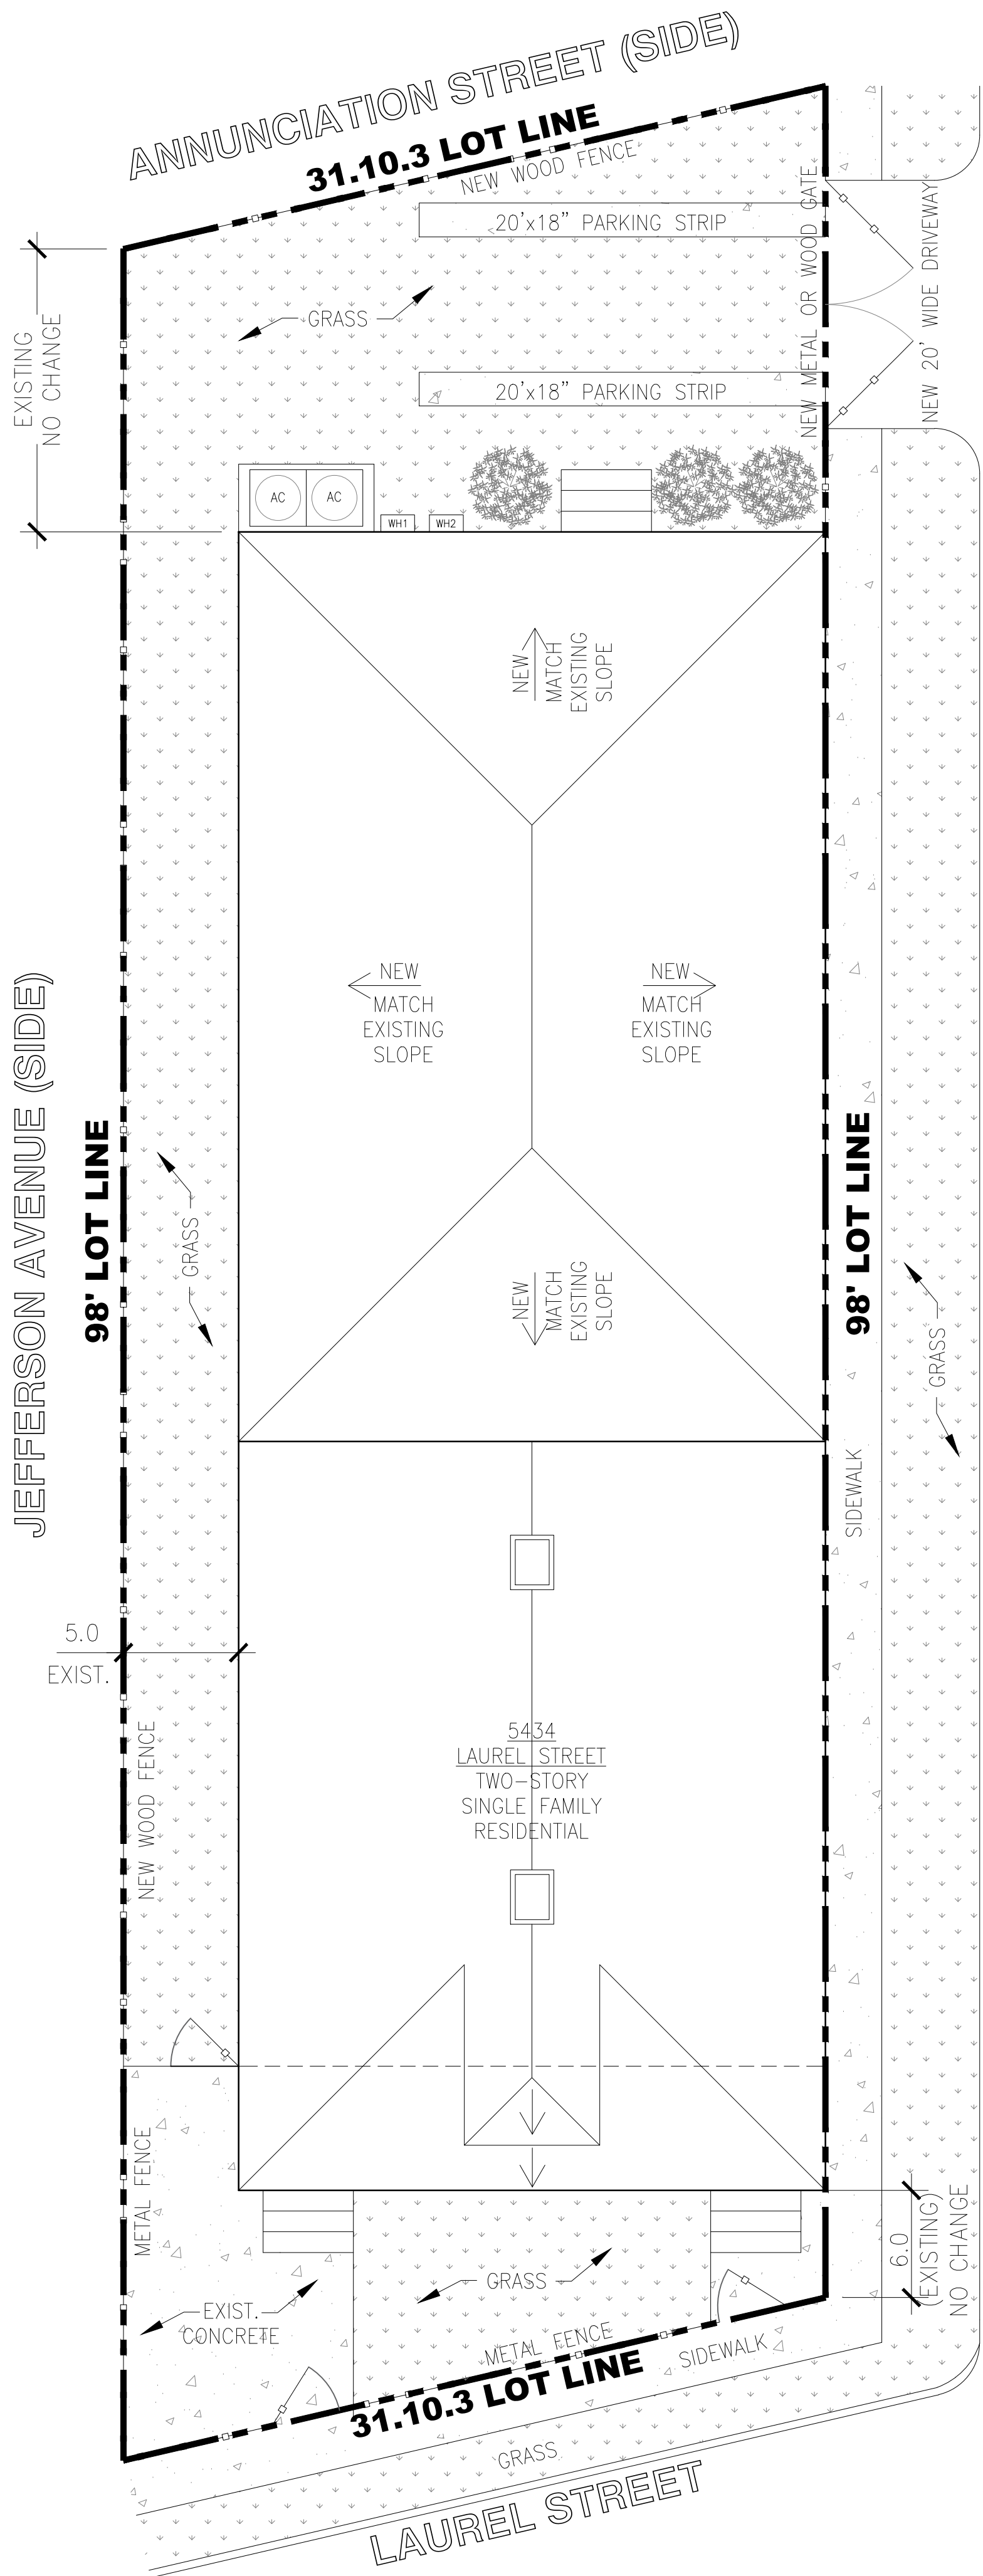


2 PROPOSED SITE PLAN  
Scale: 3/16"=1'-0"

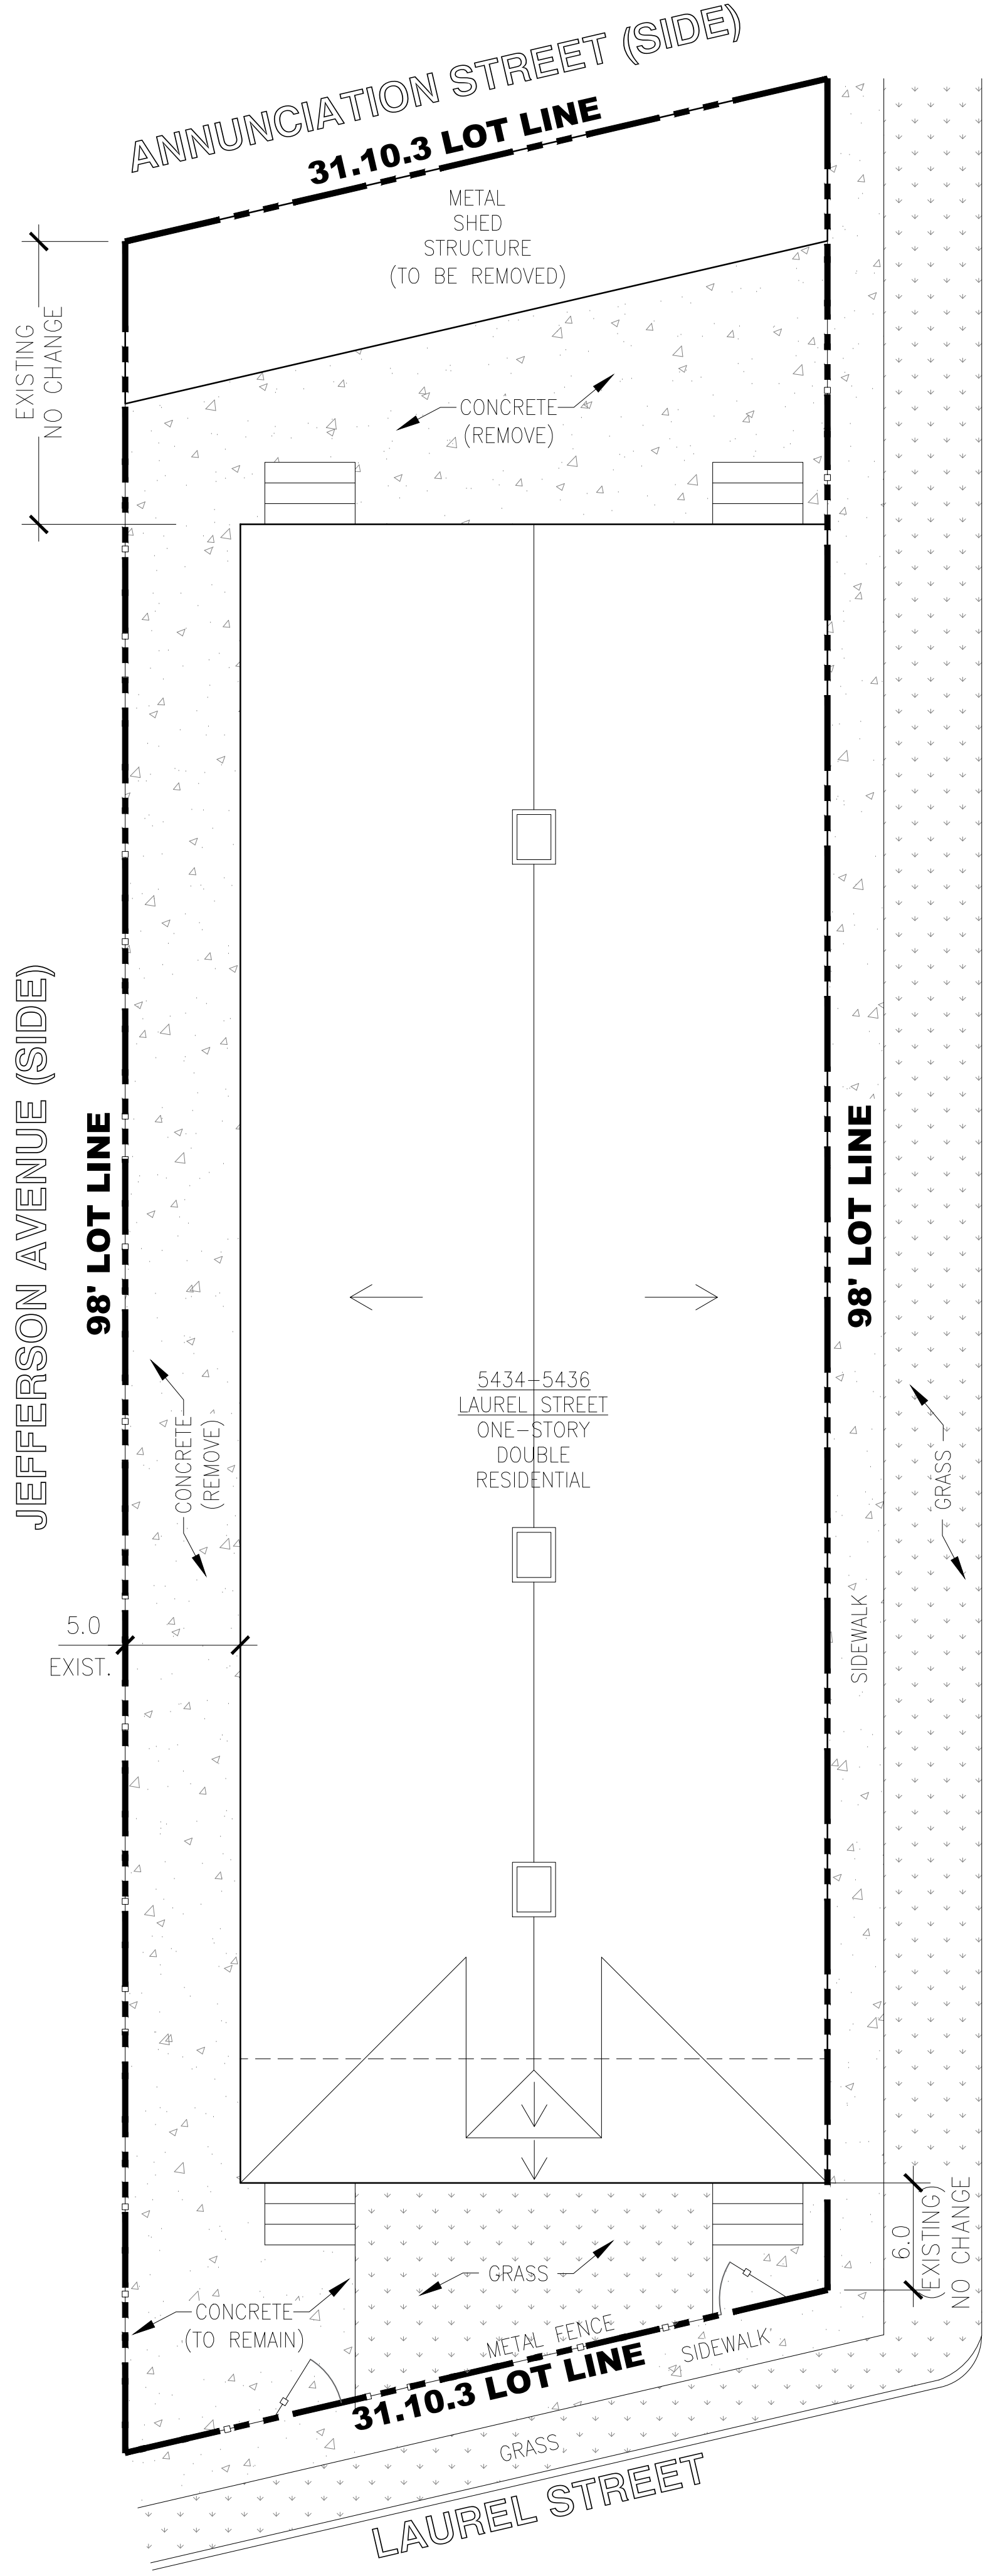

1 EXISTING SITE PLAN  
Scale: 3/16"=1'-0"

DOB STAMP		
NO.	REVISIONS/SUBMISSIONS	DATE
FOR PERMIT		07/29/22
DRAWN BY: KJ		

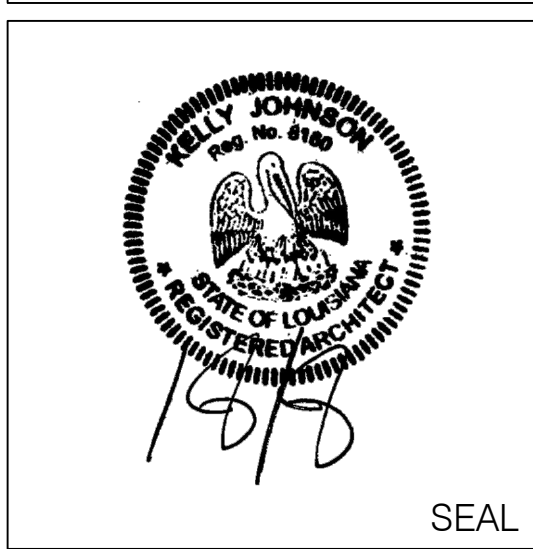

ENGINEER

LOCATION:  
**PRIVATE RESIDENCE**  
5434 LAUREL STREET  
NEW ORLEANS, LA 70115

DRAWING TITLE:  
**EXISTING SITE PLAN**

PROJECT:  
**22-R-09**

**FOR PERMIT**

**A100**  
SHEET


DEMO. WALL KEY

- WOOD EXTERIOR WALL W/ SIDING
- WOOD EXTERIOR WALL W/ SIDING  
(TO BE REMOVED)
- MASONRY EXTERIOR WALL (TO REMAIN)
- WOOD STUD WALL W/ GYPSUM  
BOARD, BOTH SIDES (TO REMAIN)
- WOOD STUD WALL W/ GYPSUM  
BOARD, BOTH SIDES (TO BE REMOVED)
- AREA NOT IN CONTRACT (NO WORK)

DEMOLITION NOTES

- A. ALL DEMOLITION WORK SHALL COMPLY WITH ALL LAWS, RULES AND REGULATIONS OF GOVERNMENTAL AUTHORITIES HAVING JURISDICTION OVER THE WORK.
- B. PROVIDE PROTECTION FOR PERSONS AND PROPERTY IN ACCORDANCE WITH ANSI/NFPA 241.
- C. PROVIDE TEMPORARY BARRICADES, CANOPIES, FENCES, RAILING, LIGHTING, ETC. REQUIRED TO PROTECT WORKMEN, ARCHITECT AND OTHERS FROM INJURY DURING THE DEMOLITION OPERATIONS.
- D. PERFORM THE DEMOLITION WORK IN SUCH A MANNER AS TO PREVENT FIRES. REMOVE ALL DEBRIS PROMPTLY TO A REFUSE CONTAINER. NO MATERIALS SHALL BE BURNED AT THE SITE.
- E. PROVIDE FIRE EXTINGUISHERS AND SMOKE DETECTION EQUIPMENT IN SERVICEABLE CONDITION, PROPER LOCATION, AND IDENTIFIED SO THAT IT WILL BE AVAILABLE FOR IMMEDIATE USE.
- F. PROTECT AND MAINTAIN EXISTING UTILITY LINES WHICH ARE TO REMAIN IN SERVICE IN SUCH A MANNER AS TO AVOID INTERRUPTION OF THE SERVICE. CAP ALL UTILITIES TERMINATED BY THE DEMOLITION WORK IN A MANNER APPROVED BY THE GOVERNMENTAL AUTHORITIES AND UTILITY COMPANIES HAVING JURISDICTION.
- G. VERIFY ALL DIMENSIONS IN FIELD.
- H. REMOVE NON-LOAD BEARING PARTITIONS AS DASHED ON PLANS.
- I. ALL EQUIPMENT CURRENTLY IN THE PREMISES IS THE PROPERTY OF THE OWNER. ANY EQUIPMENT, FIXTURES, FURNITURE, ETC. IDENTIFIED TO BE DEMOLISHED OR REMOVED AS PART OF THE DEMOLITION AND BUILD-OUT MUST BE DONE IN SUCH A MANNER AS NOT TO DAMAGE, DESTROY OR RENDER INOPERABLE SUCH EQUIPMENT AND FIXTURES.
- J. ALL DEMOLISHED OR REMOVED EQUIPMENT TO BE PLACED IN AN AREA DESIGNATED BY THE OWNER.

KEY NOTES	
TAG	DESCRIPTION
A101-001	REMOVE KITCHEN APPLIANCES & FIXTURES. CAP PLUMBING LINES BELOW FINISH FLOOR LEVEL. REMOVE CABINETS AND FINISHED FLOOR.
A101-002	REMOVE BATHROOM FIXTURES. CAP PLUMBING LINES BELOW FINISH FLOOR LEVEL. REMOVE CABINETS AND FINISHED FLOOR.
A101-003	REMOVE FIREPLACE FROM FOUNDATION THROUGH ROOF.
A101-004	REMOVE STEPS.
A101-005	REMOVE WINDOW INCLUDING INTERIOR AND EXTERIOR TRIM.
A101-006	REMOVE DOOR INCLUDING TRIMWORK.
A101-007	REMOVE POCKET DOOR AND SURROUNDING WALL AND TRIM.
A101-008	REMOVE WALL INCLUDING BUT NOT LIMITED TO ANY ELECTRICAL OR PLUMBING.
A101-009	REMOVE LOAD BEARING WALL AS DIMENSIONED INCLUDING ALL ELECTRICAL AND PLUMBING. CONTRACTOR TO SHORE CEILING JOISTS ABOVE PRIOR TO REMOVAL.

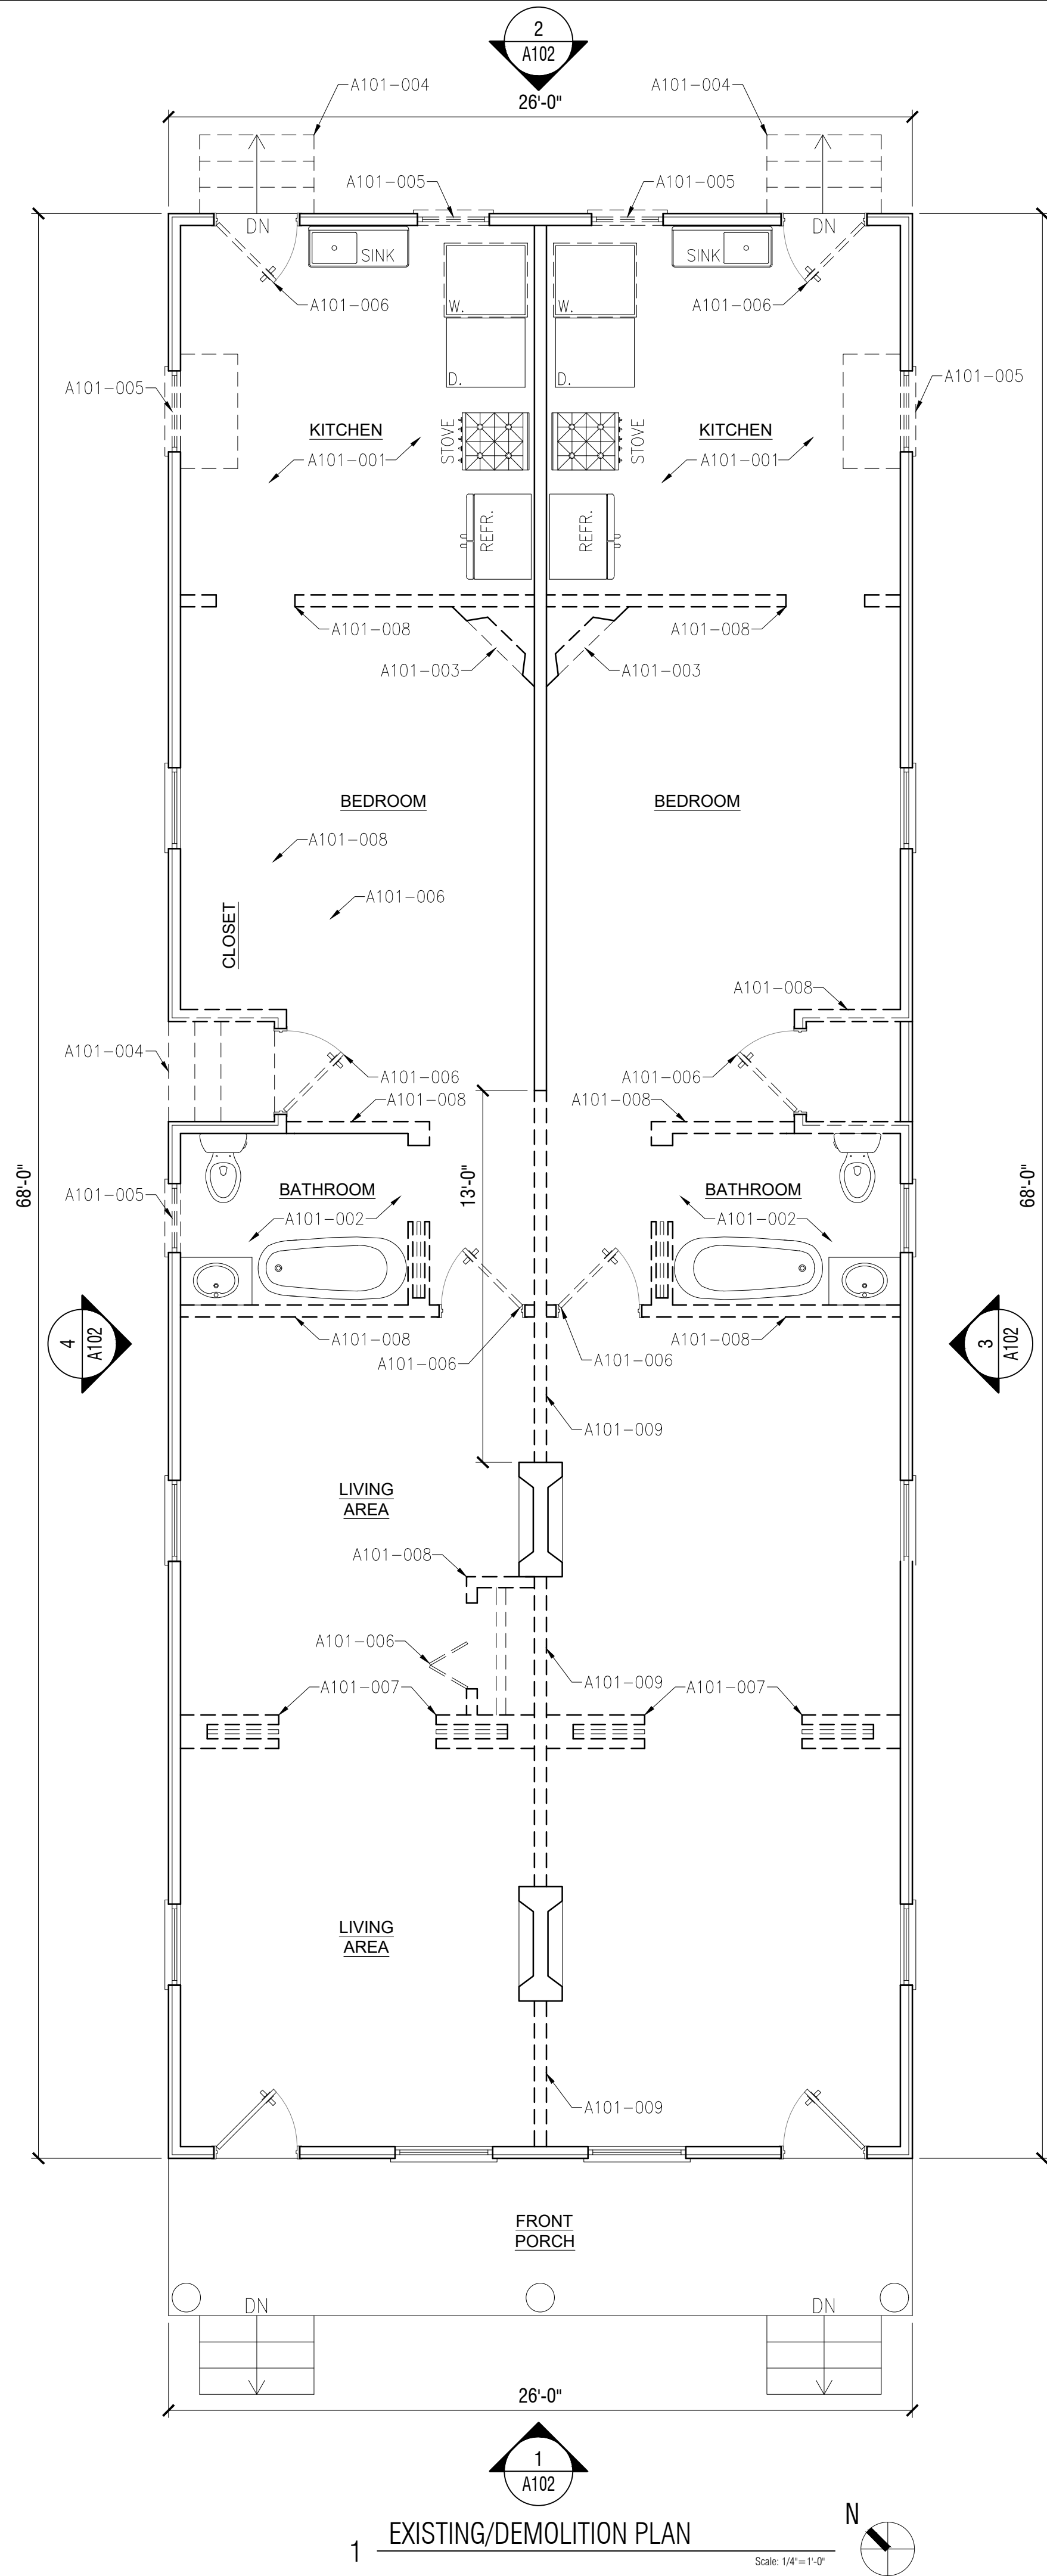

DOB STAMP

NO.	REVISIONS/SUBMISSIONS	DATE
	FOR PERMIT	07/29/22
DRAWN BY: KJ		



SEAL

ENGINEER

LOCATION:  
**PRIVATE RESIDENCE**  
5434 LAUREL STREET  
NEW ORLEANS, LA 70115

DRAWING TITLE:  
**EXISTING/DEMOLITION PLANS**

PROJECT:  
**22-R-09**

**FOR PERMIT**

**A101**




SHEET

KKJOHNSON ARCHITECTURE & DESIGN  
4618 Camp Street, New Orleans, LA 70115  
p: 504.327.9717 e: kjohnson@kjohnsonarchitecture.com

**KK** JOHNSON  
ARCHITECTURE  
& Design

1 EXISTING/DEMOLITION PLAN

Scale: 1/4"=1'-0"

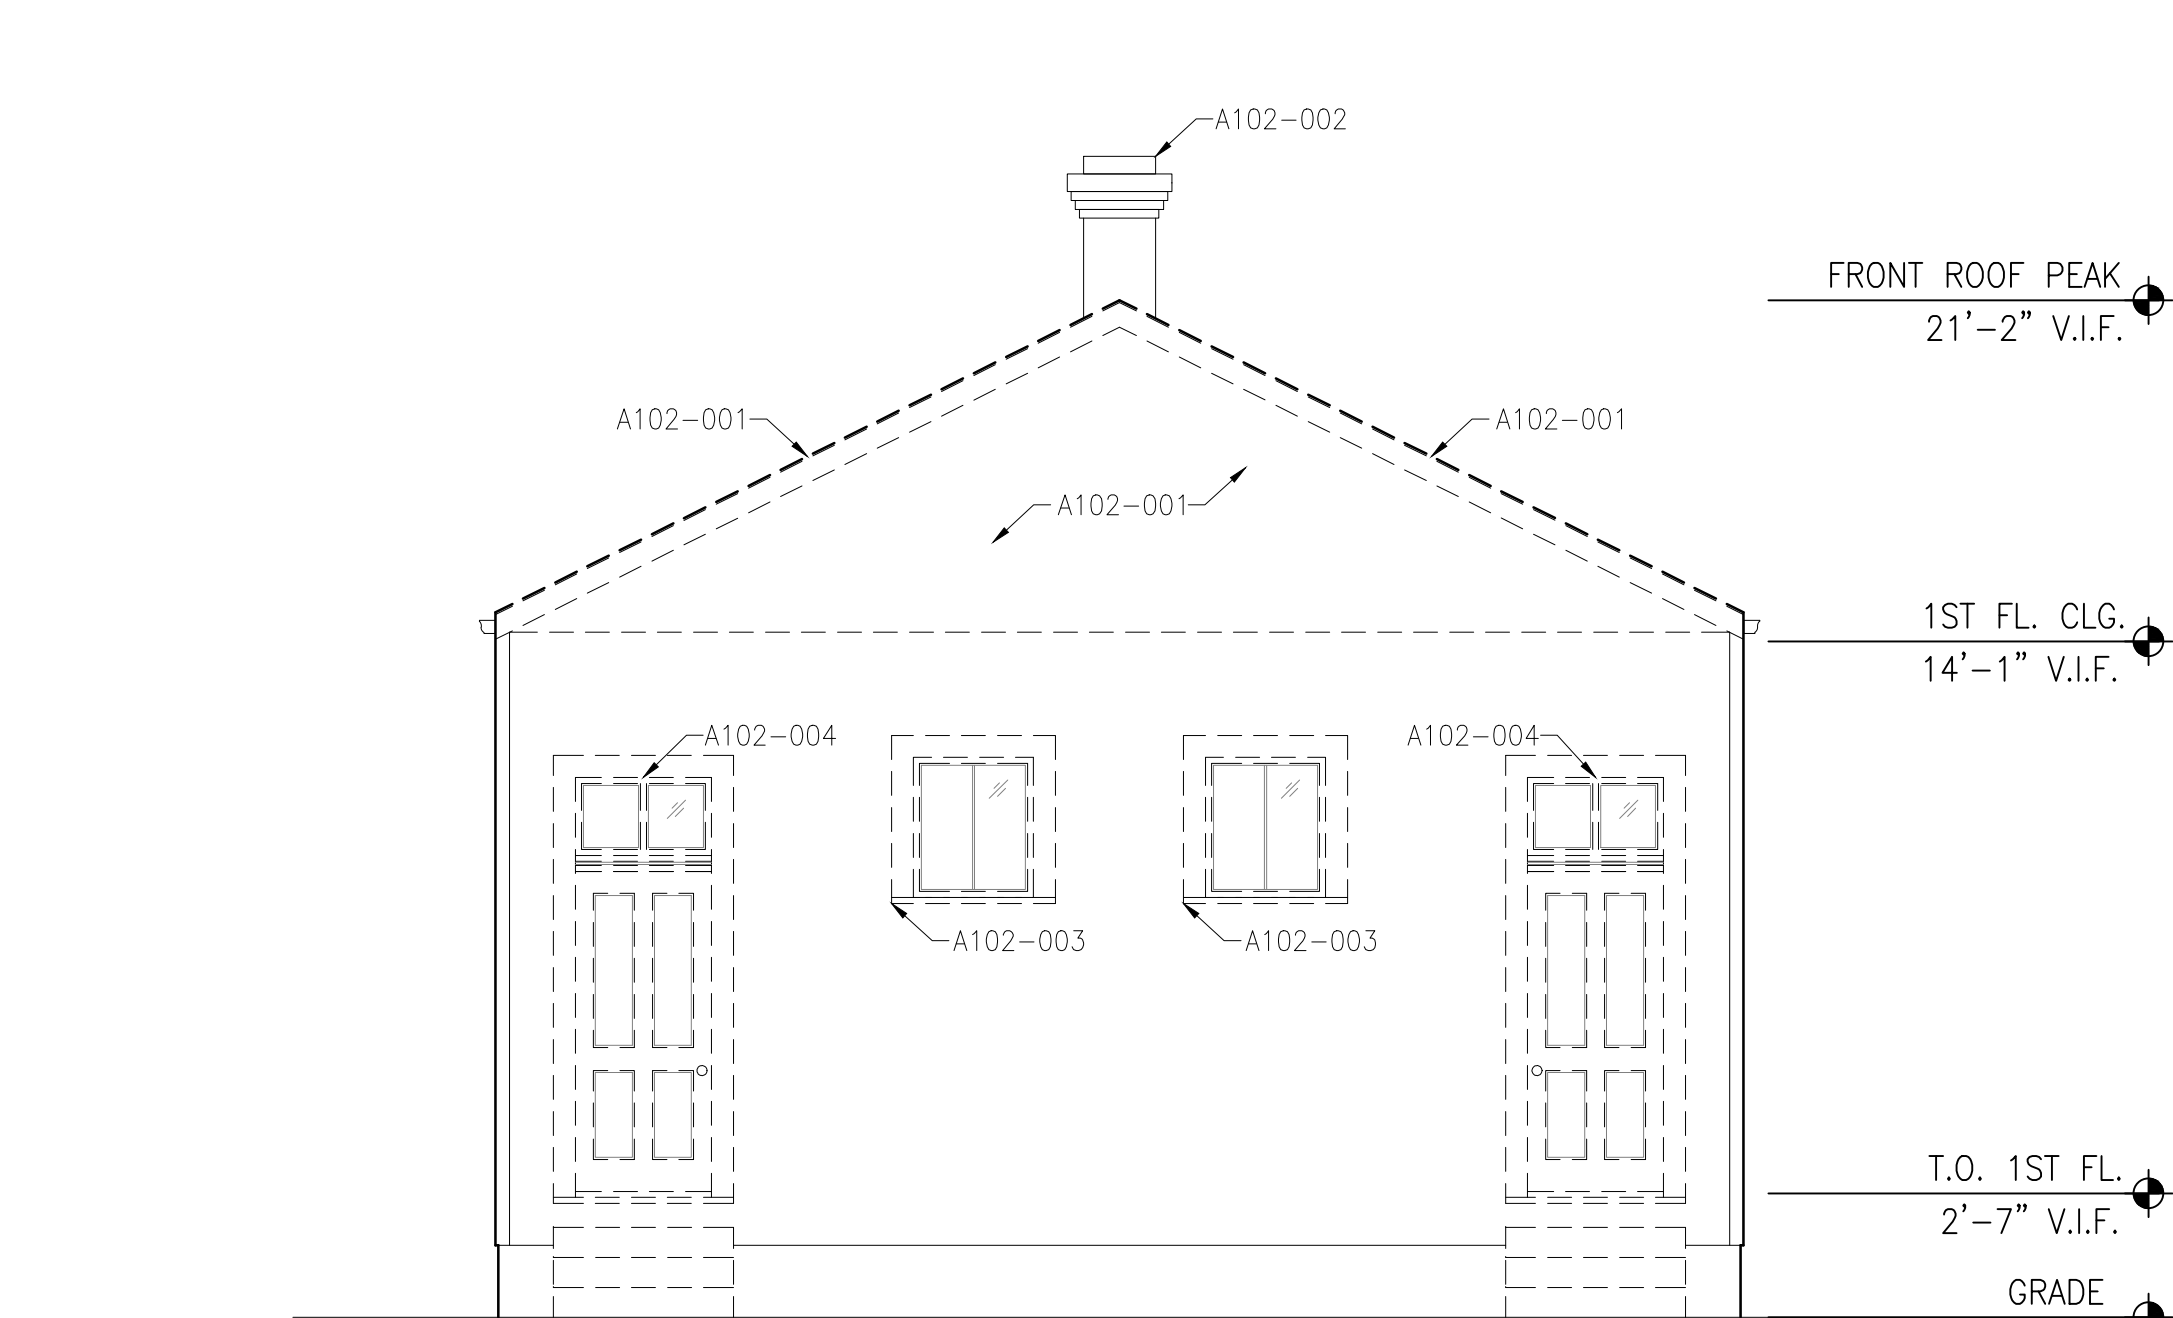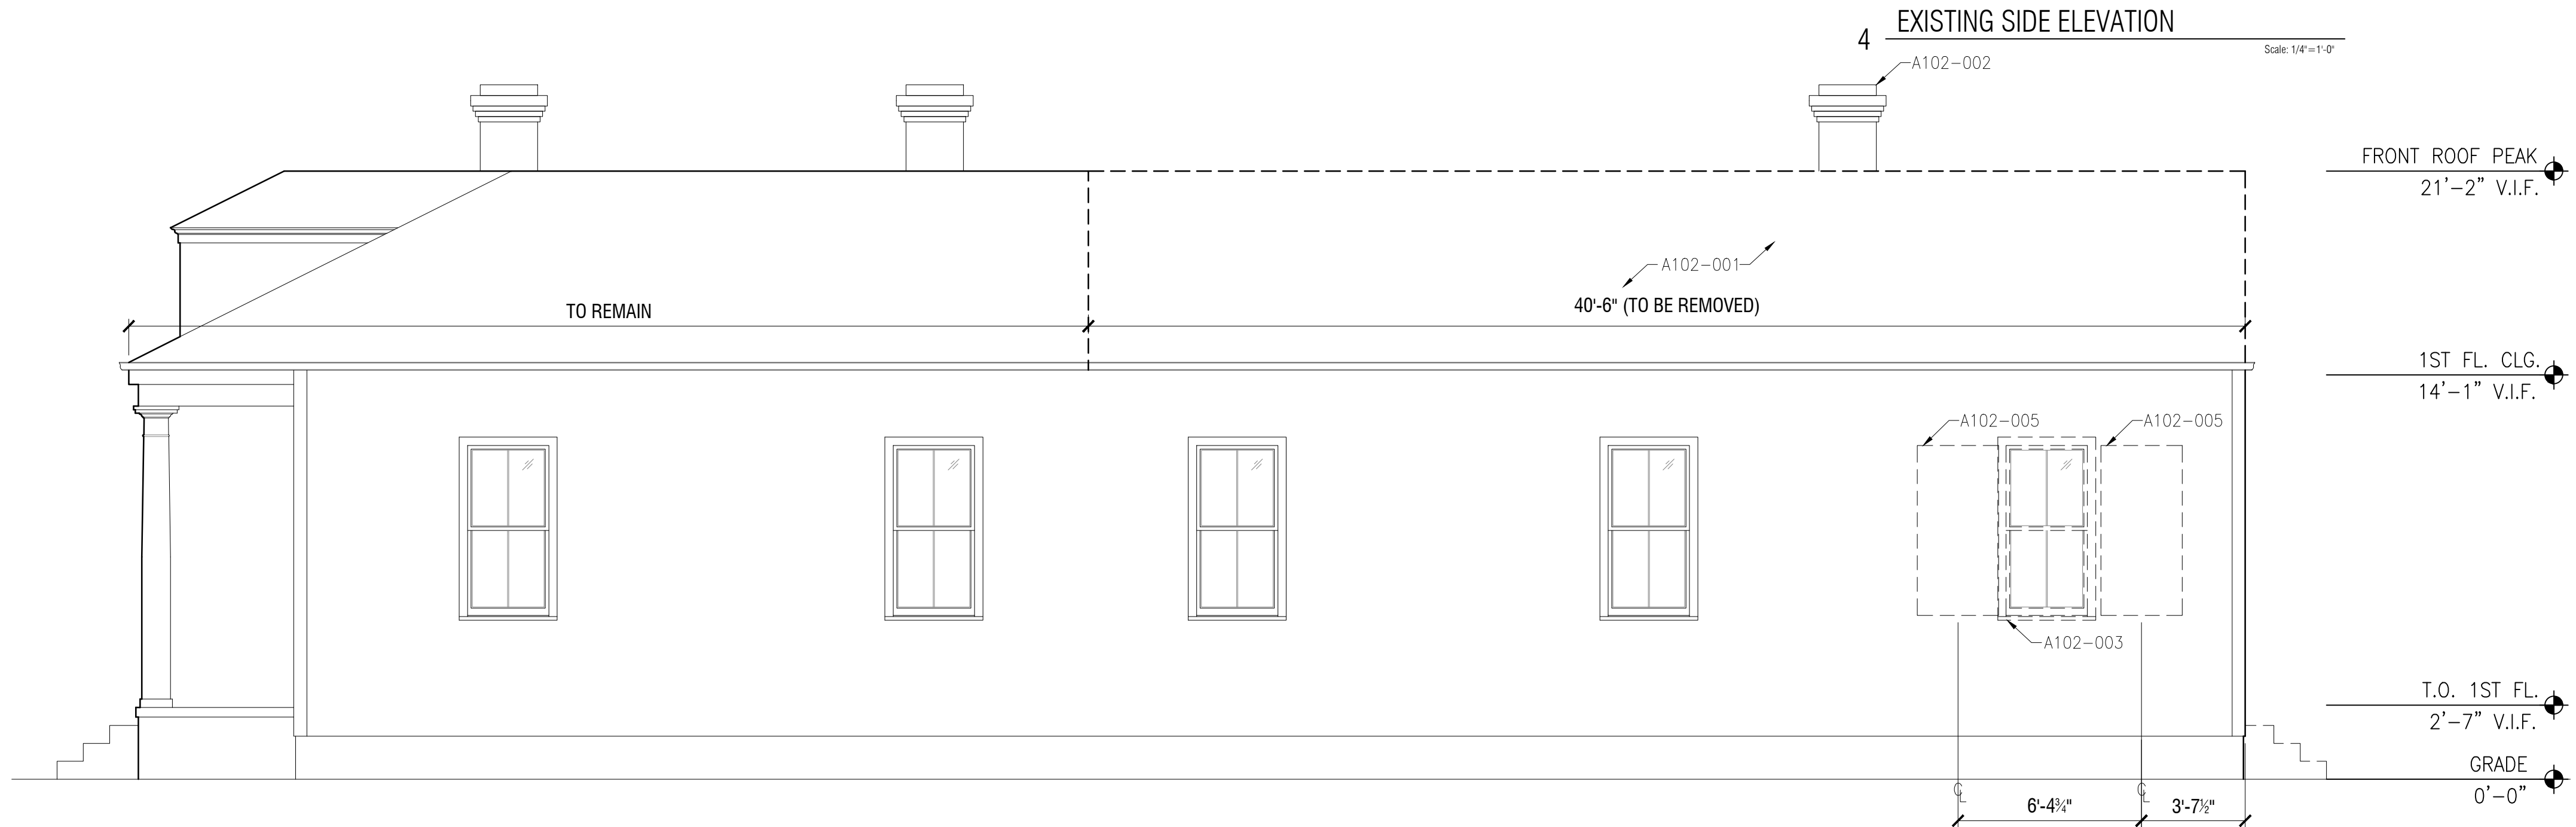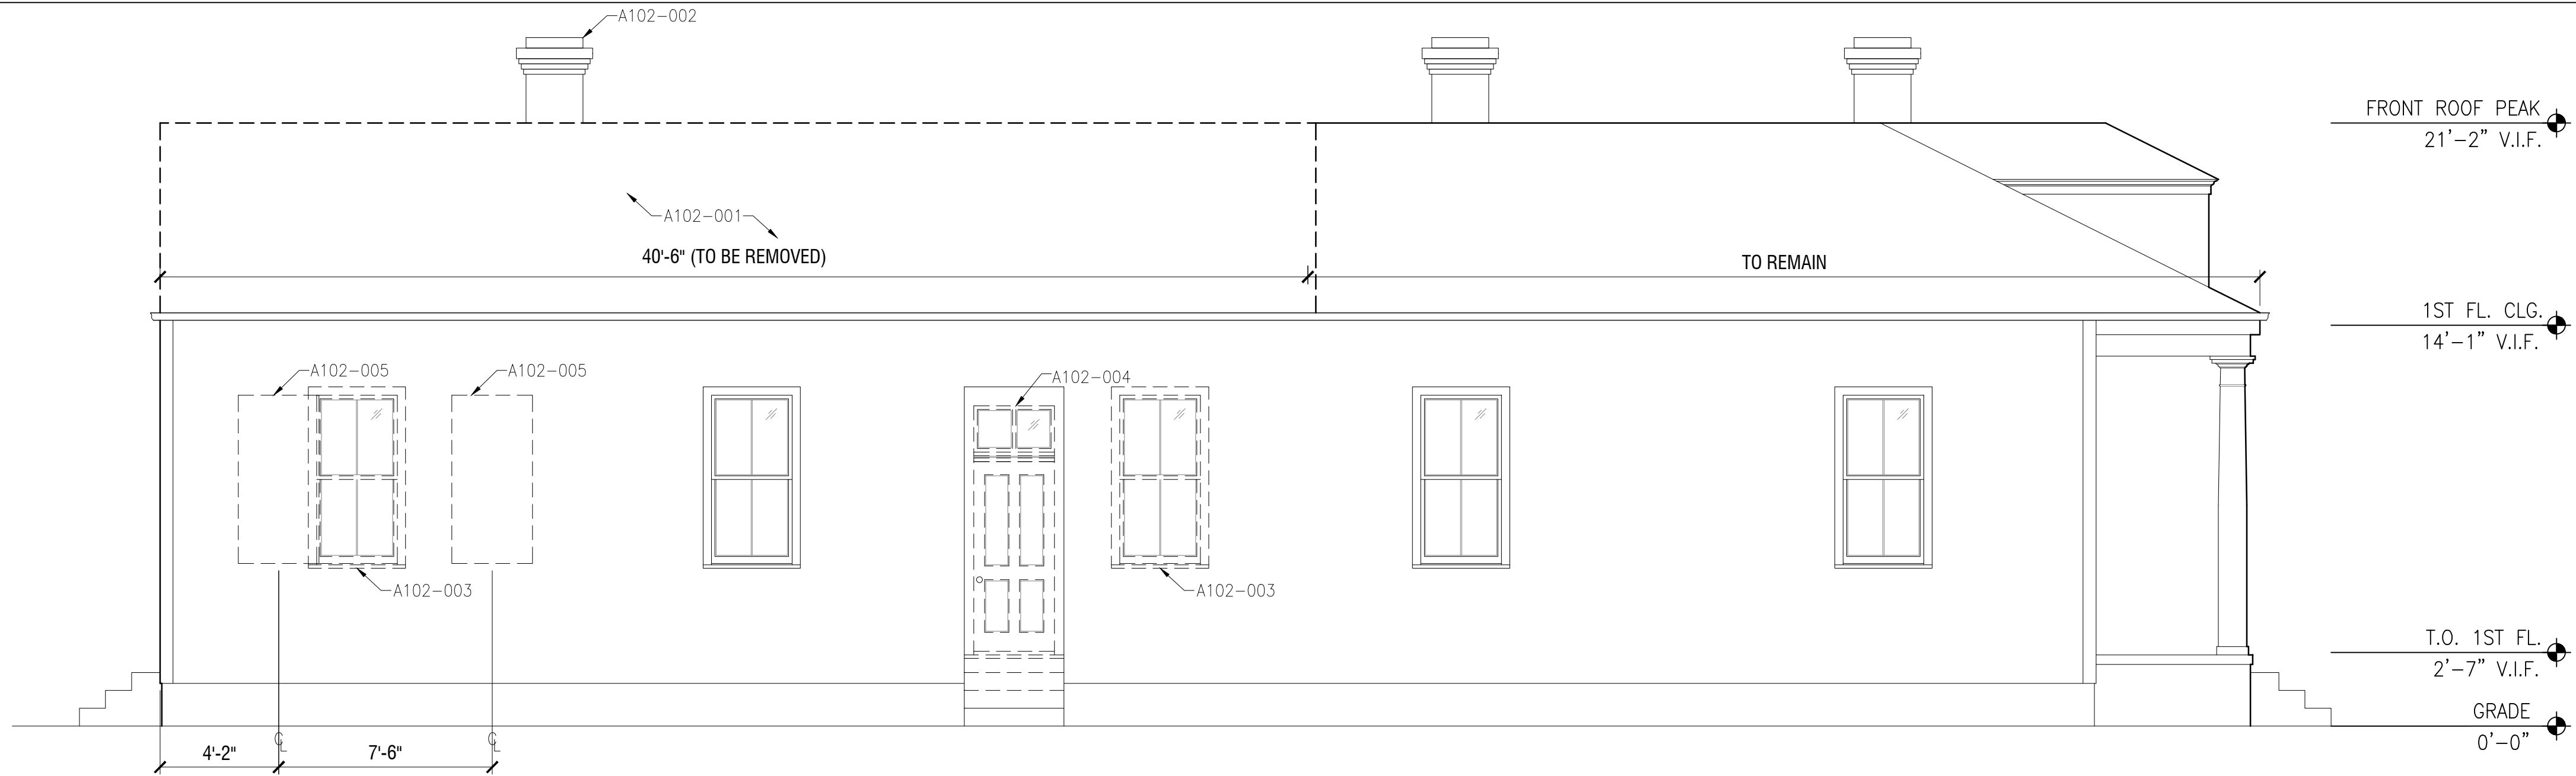

### DEMOLITION NOTES

- ALL DEMOLITION WORK SHALL COMPLY WITH ALL LAWS, RULES AND REGULATIONS OF GOVERNMENTAL AUTHORITIES HAVING JURISDICTION OVER THE WORK.
- PROVIDE PROTECTION FOR PERSONS AND PROPERTY IN ACCORDANCE WITH ANSI/NFPA 241.
- PROVIDE TEMPORARY BARRICADES, CANOPIES, FENCES, RAILING, LIGHTING, ETC. REQUIRED TO PROTECT WORKMEN, ARCHITECT AND OTHERS FROM INJURY DURING THE DEMOLITION OPERATIONS.
- PERFORM THE DEMOLITION WORK IN SUCH A MANNER AS TO PREVENT FIRES. REMOVE ALL DEBRIS PROMPTLY TO A REFUSE CONTAINER. NO MATERIALS SHALL BE BURNED AT THE SITE.
- PROVIDE FIRE EXTINGUISHERS AND SMOKE DETECTION EQUIPMENT IN SERVICEABLE CONDITION, PROPER LOCATION, AND IDENTIFIED SO THAT IT WILL BE AVAILABLE FOR IMMEDIATE USE.
- PROTECT AND MAINTAIN EXISTING UTILITY LINES WHICH ARE TO REMAIN IN SERVICE IN SUCH A MANNER AS TO AVOID INTERRUPTION OF THE SERVICE. CAP ALL UTILITIES TERMINATED BY THE DEMOLITION WORK IN A MANNER APPROVED BY THE GOVERNMENTAL AUTHORITIES AND UTILITY COMPANIES HAVING JURISDICTION.
- VERIFY ALL DIMENSIONS IN FIELD.
- REMOVE NON-LOAD BEARING PARTITIONS AS DASHED ON PLANS.
- ALL EQUIPMENT CURRENTLY IN THE PREMISES IS THE PROPERTY OF THE OWNER. ANY EQUIPMENT, FIXTURES, FURNITURE, ETC. IDENTIFIED TO BE DEMOLISHED OR REMOVED AS PART OF THE DEMOLITION AND BUILD-OUT MUST BE DONE IN SUCH A MANNER AS NOT TO DAMAGE, DESTROY OR RENDER INOPERABLE SUCH EQUIPMENT AND FIXTURES.
- ALL DEMOLISHED OR REMOVED EQUIPMENT TO BE PLACED IN AN AREA DESIGNATED BY THE OWNER.

### KEY NOTES

TAG	DESCRIPTION
A102-001	REMOVE ROOF AS DIMENSIONED INCLUDING BUT NOT LIMITED TO SHINGLES, SHEATHING, INSULATION AND ROOF JOISTS. CEILING JOISTS TO REMAIN.
A102-002	REMOVE CHIMNEY.
A102-003	REMOVE WINDOW. STORE FOR REUSE.
A102-004	REMOVE DOOR, TRIM AND STEPS.
A102-005	REMOVED WALL AS DIMENSIONED FOR NEW WINDOW. SEE WINDOW SCHEDULE ON SHEET A203 FOR WINDOW SIZES.

DOB STAMP

NO.	REVISIONS/SUBMISSIONS	DATE
FOR PERMIT		07/29/22
DRAWN BY: KJ		



SEAL

ENGINEER

LOCATION:  
**PRIVATE RESIDENCE**  
5434 LAUREL STREET  
NEW ORLEANS, LA 70115


DRAWING TITLE:  
**EXISTING/DEMOLITION  
ELEVATIONS**

PROJECT:  
**22-R-09**

FOR PERMIT

A102

SHEET

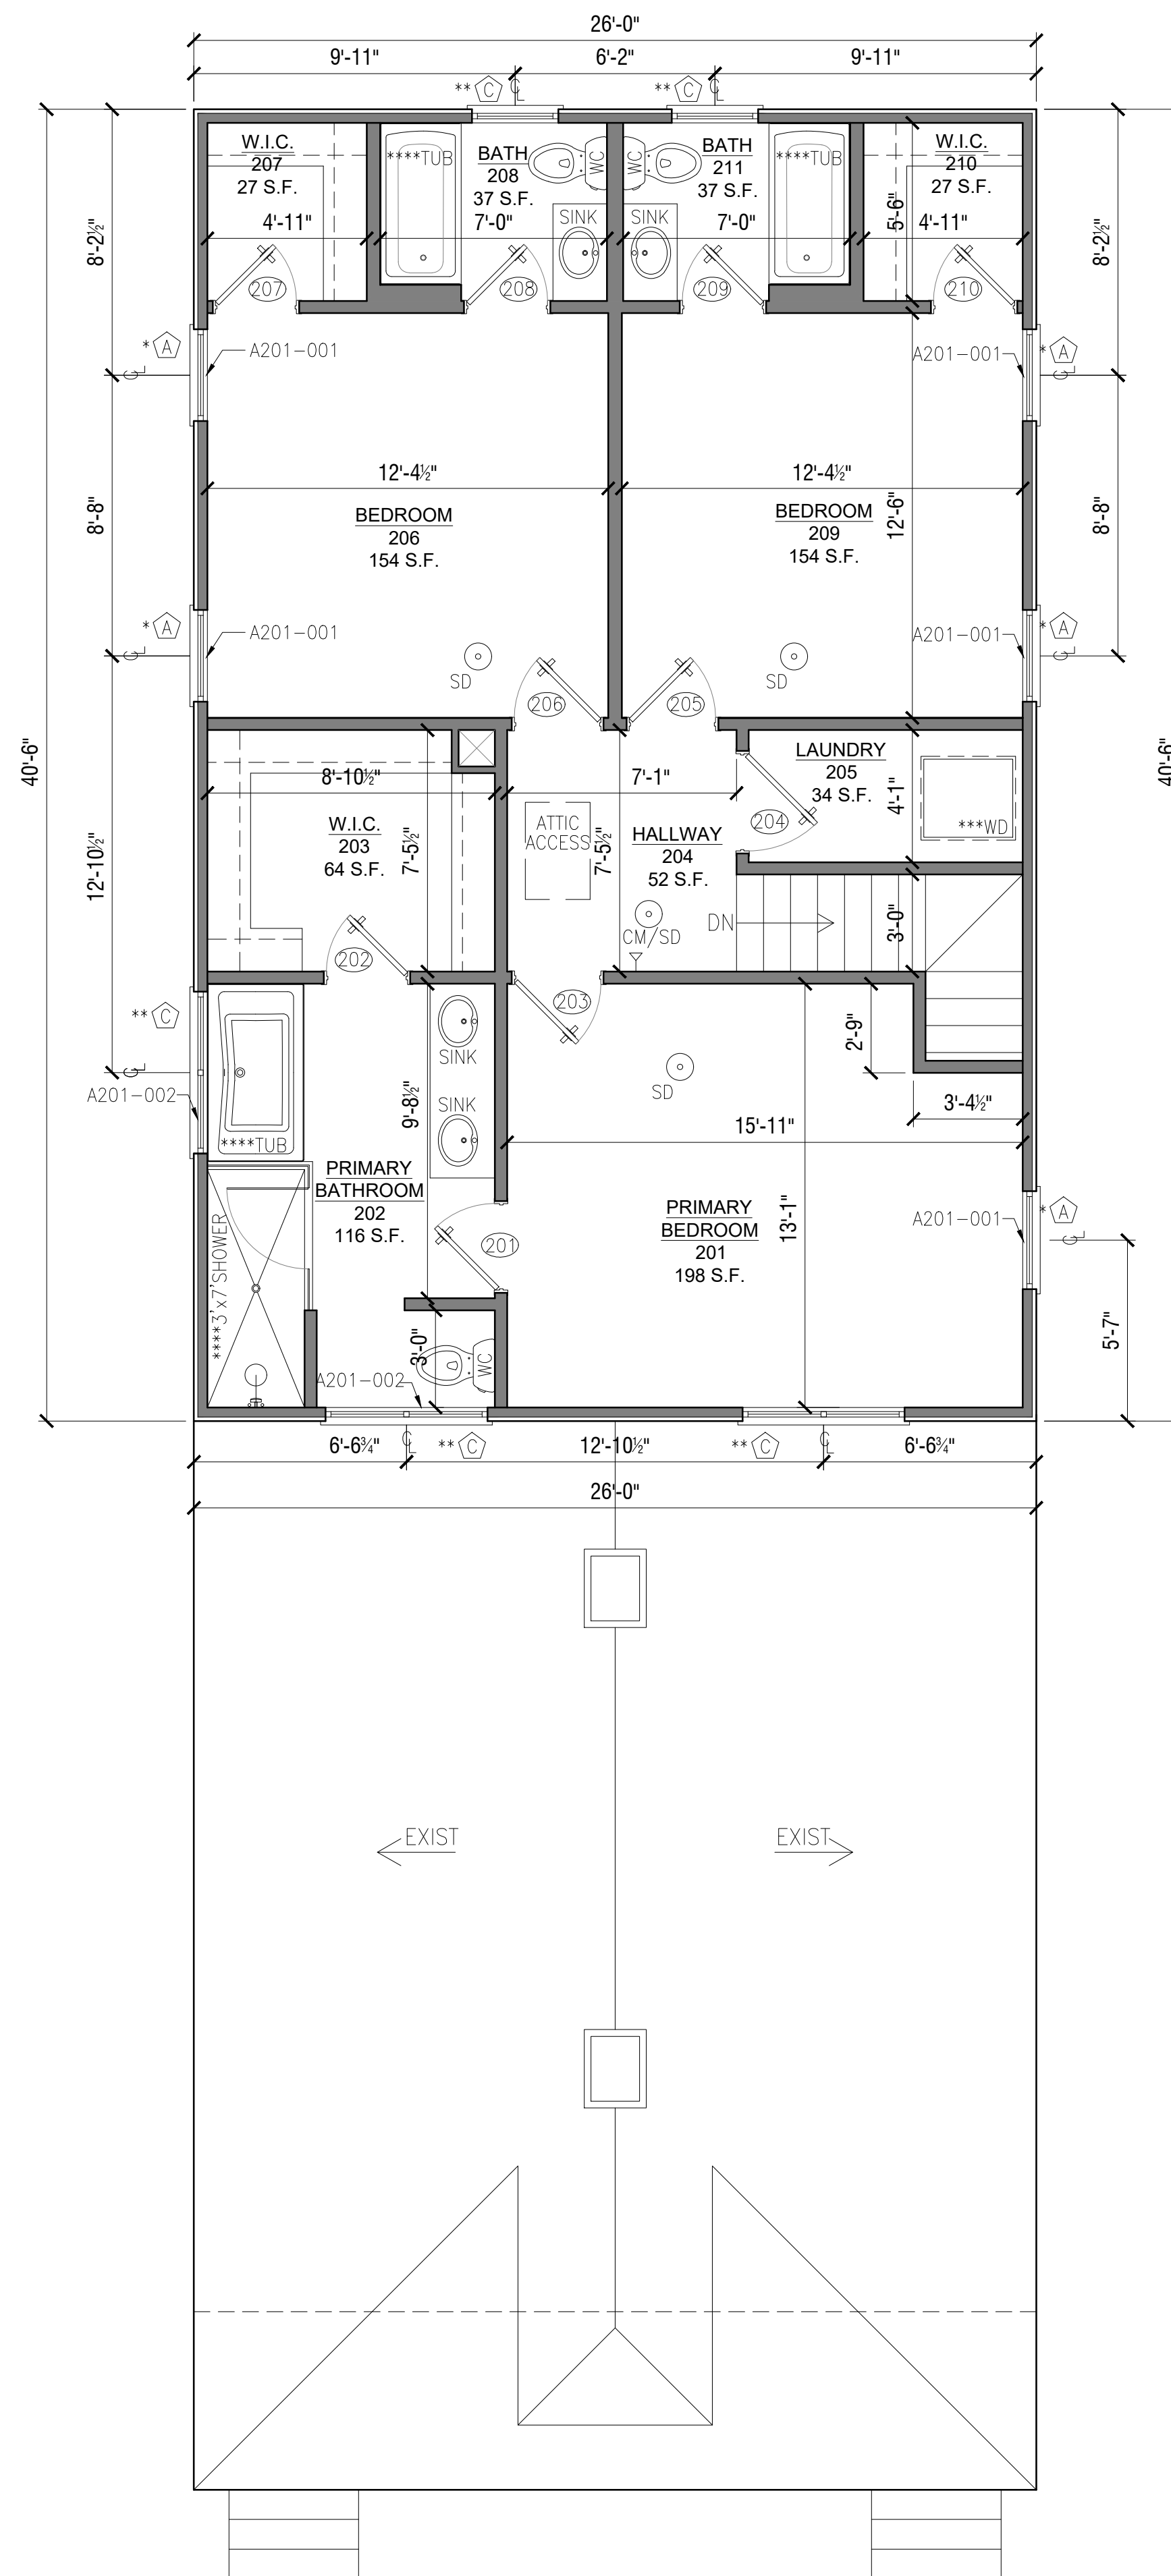

## 2. PROPOSED 2ND FLOOR PLAN


NOTE: CONTRACTOR TO HIRE STRUCTURAL ENGINEER TO EXAMINE EXISTING FOUNDATION & DETERMINE IF FOUNDATION WORK IS REQUIRED TO SUPPORT NEW SECOND STORY.

- \* WINDOW SILL 60" OR GREATER ABOVE FINISHED FLOOR.
- \*\* WINDOW MEETS EGRESS REQUIREMENTS.
- \*\*\* PROVIDE OVERFLOW PAN & DRAIN AT WASHER. VENT DRYER DIRECTLY TO OUTSIDE.
- \*\*\*\* PROVIDE TILE SURROUND AT ALL TUBS AND SHOWERS.

SEE A301 & A302 FOR MECHANICAL,  
ELECTRICAL & PLUMBING INFO.

SEE A203 PLAN NOTES #9 FOR  
INSULATION REQUIREMENTS



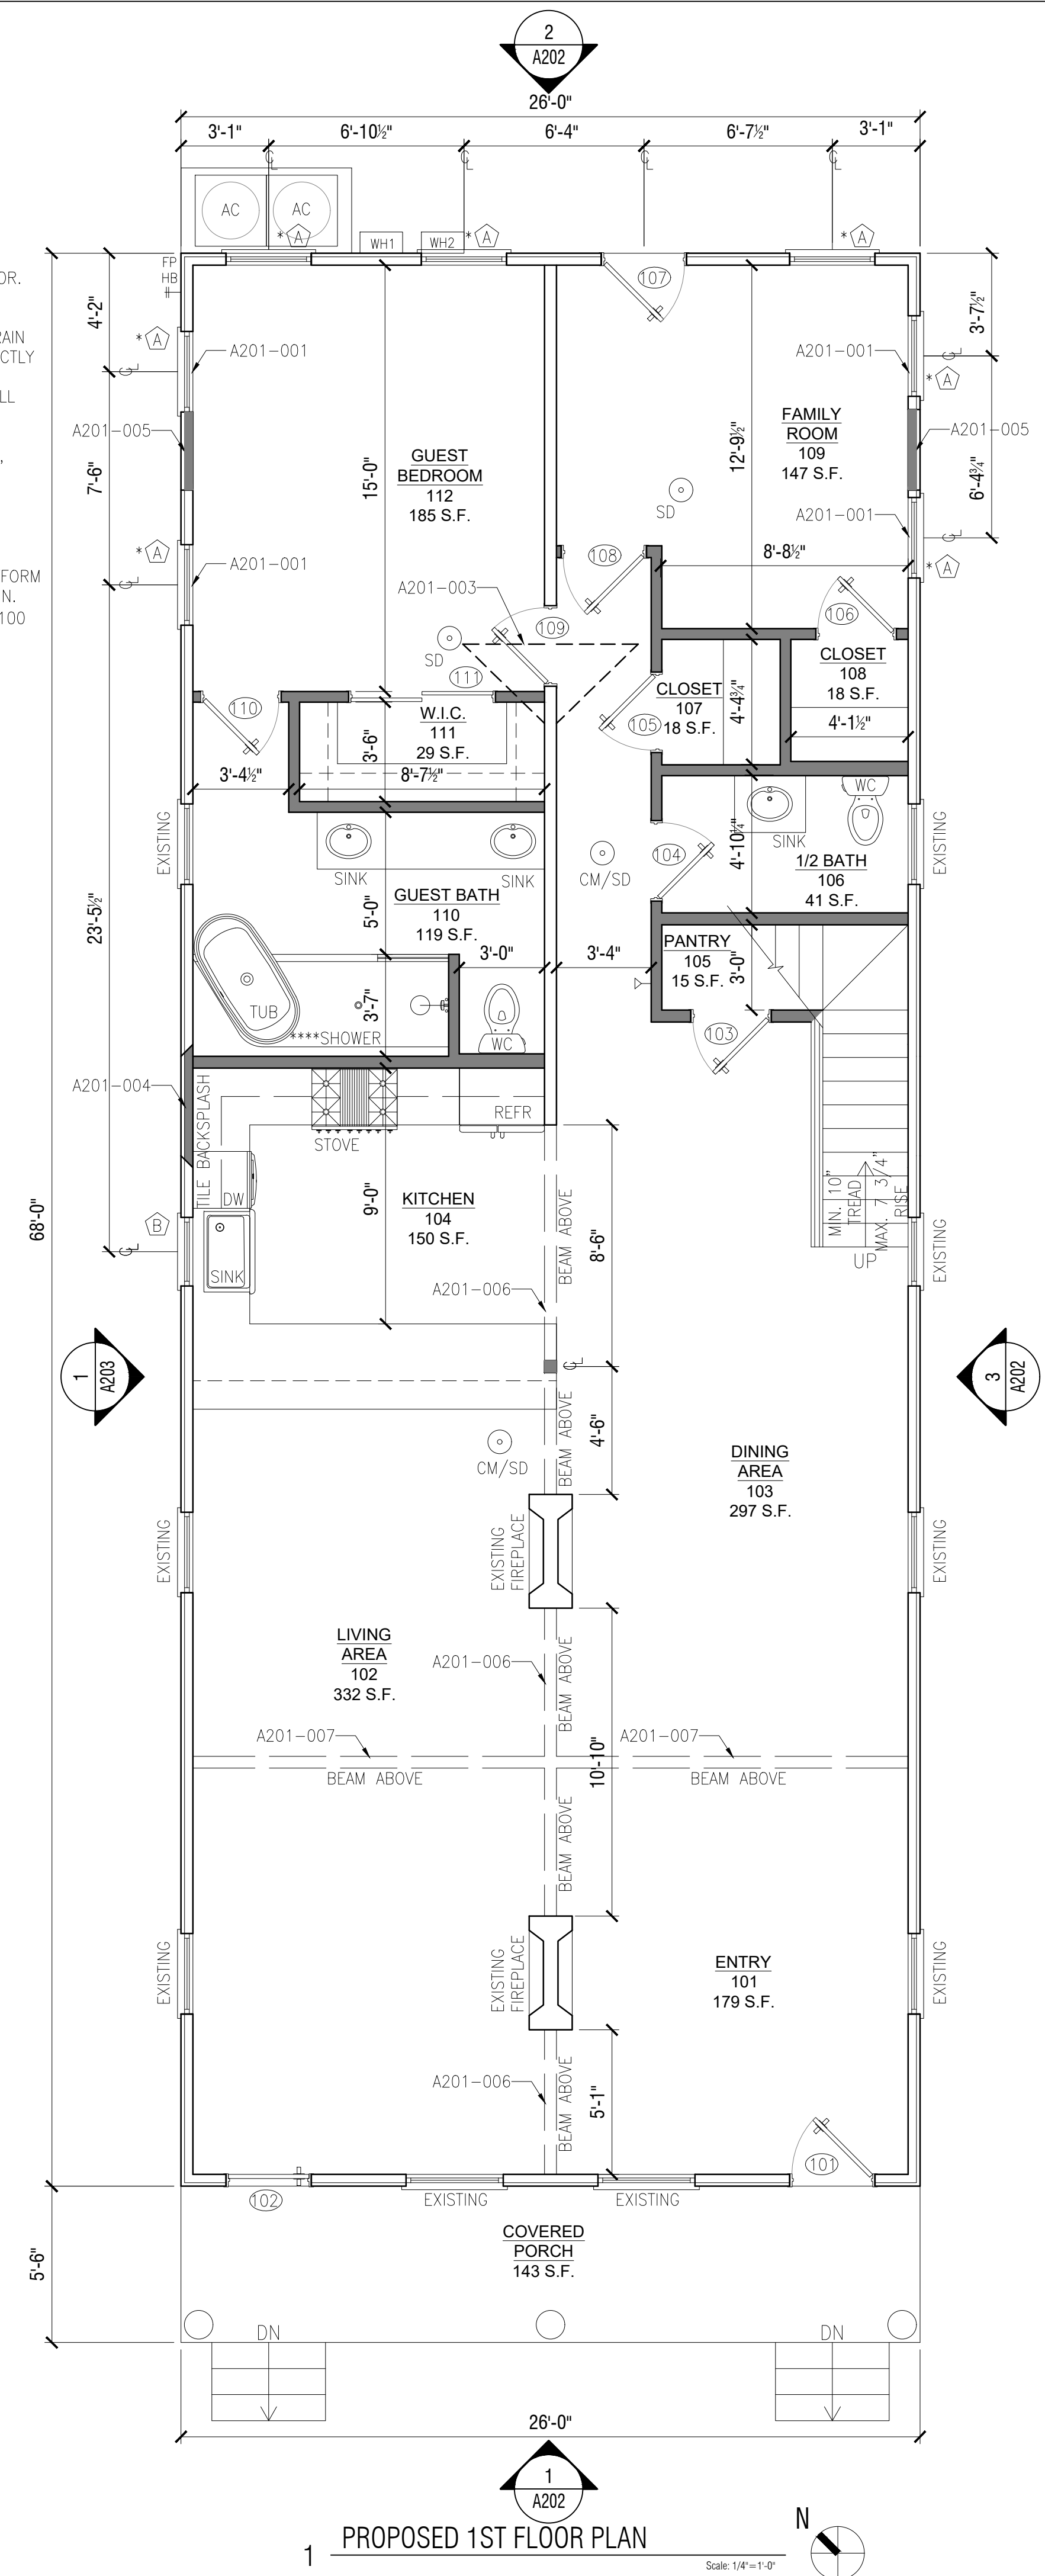


LOCATE CONDENSING UNITS ON PLATFORM  
ABOVE BASE FLOOD ELEVATION & MIN.  
3'-0" FROM PROPERTY LINE. SEE A100  
FOR LOCATION.







PROPOSED 1ST FLOOR PLAN

Scale: 1/4" = 1'-0"

WALL KEY

	EXIST. WOOD EXTERIOR WALL W/ SIDING
	NEW WOOD EXTERIOR WALL OR INFILL W/ SIDING
	EXISTING MASONRY WALL
	EXIST. WOOD FRAMED WALL
	NEW WOOD FRAMED INTERIOR WALL W/ $\frac{5}{8}$ GYP.

## SYMBOLS KEY

	HOSE BIB
	THERMOSTAT
	SMOKE DETECTOR
	CARBON MONOXIDE/ SMOKE DETECTOR

## KEY NOTES

TAG	DESCRIPTION
A201-001	NEW WINDOW TO MATCH EXISTING WOOD SINGLE-PANE 2/2 WINDOWS.
A201-002	SILL OF WINDOW TO BE MIN. 60" ABOVE FINISHED FLOOR.
A201-003	INFILL FLOORING AT LOCATION OF CHIMNEY REMOVAL. MATCH EXIST. FLOORS & LAP TO BLEND.
A201-004	INFILL EXISTING DOOR OPENING WITH WOOD STUDS & $\frac{3}{4}$ " GYP. AT INTERIOR & PLYWOOD SHEATHING WITH SIDING AT EXTERIOR. SIDING TO MATCH EXIST. LAP TO BLEND.
A201-005	INFILL EXISTING WINDOW OPENING WITH WOOD STUDS & $\frac{3}{4}$ " GYP. AT INTERIOR & PLYWOOD SHEATHING WITH SIDING AT EXTERIOR. SIDING TO MATCH EXIST. LAP TO BLEND.
A201-006	PROVIDE LVL BEAM TO SUPPORT CEILING JOISTS AT LOCATION OF CENTER WALL REMOVAL. SEE STRUCTURAL FOR LVL SIZES. WRAP BEAM IN WOOD TO BE PAINTED OR STAINED.
A201-007	PROVIDE DECORATIVE BEAM AT LOCATION OF POCKET DOOR REMOVAL. WRAP BEAM IN WOOD TO BE PAINTED OR STAINED.

JOB STAMP

NO.	REVISIONS/SUBMISSIONS	DATE
	FOR PERMIT	07/29/22
DRAWN BY: KJ		



REAL

ENGINEER

PRIVATE RESIDENCE  
5434 LAUREL STREET  
NEW ORLEANS, LA 70115

4618 Camp Street, New Orleans, LA 70115  
p: 504.327.9717 e: kjohnson@kjohnsonarchitecture.com

DRAWING TITLE:

## PROPOSED PLANS


PROJECT: **22-R-09**

FOR PERMIT

A201


SHEET | |



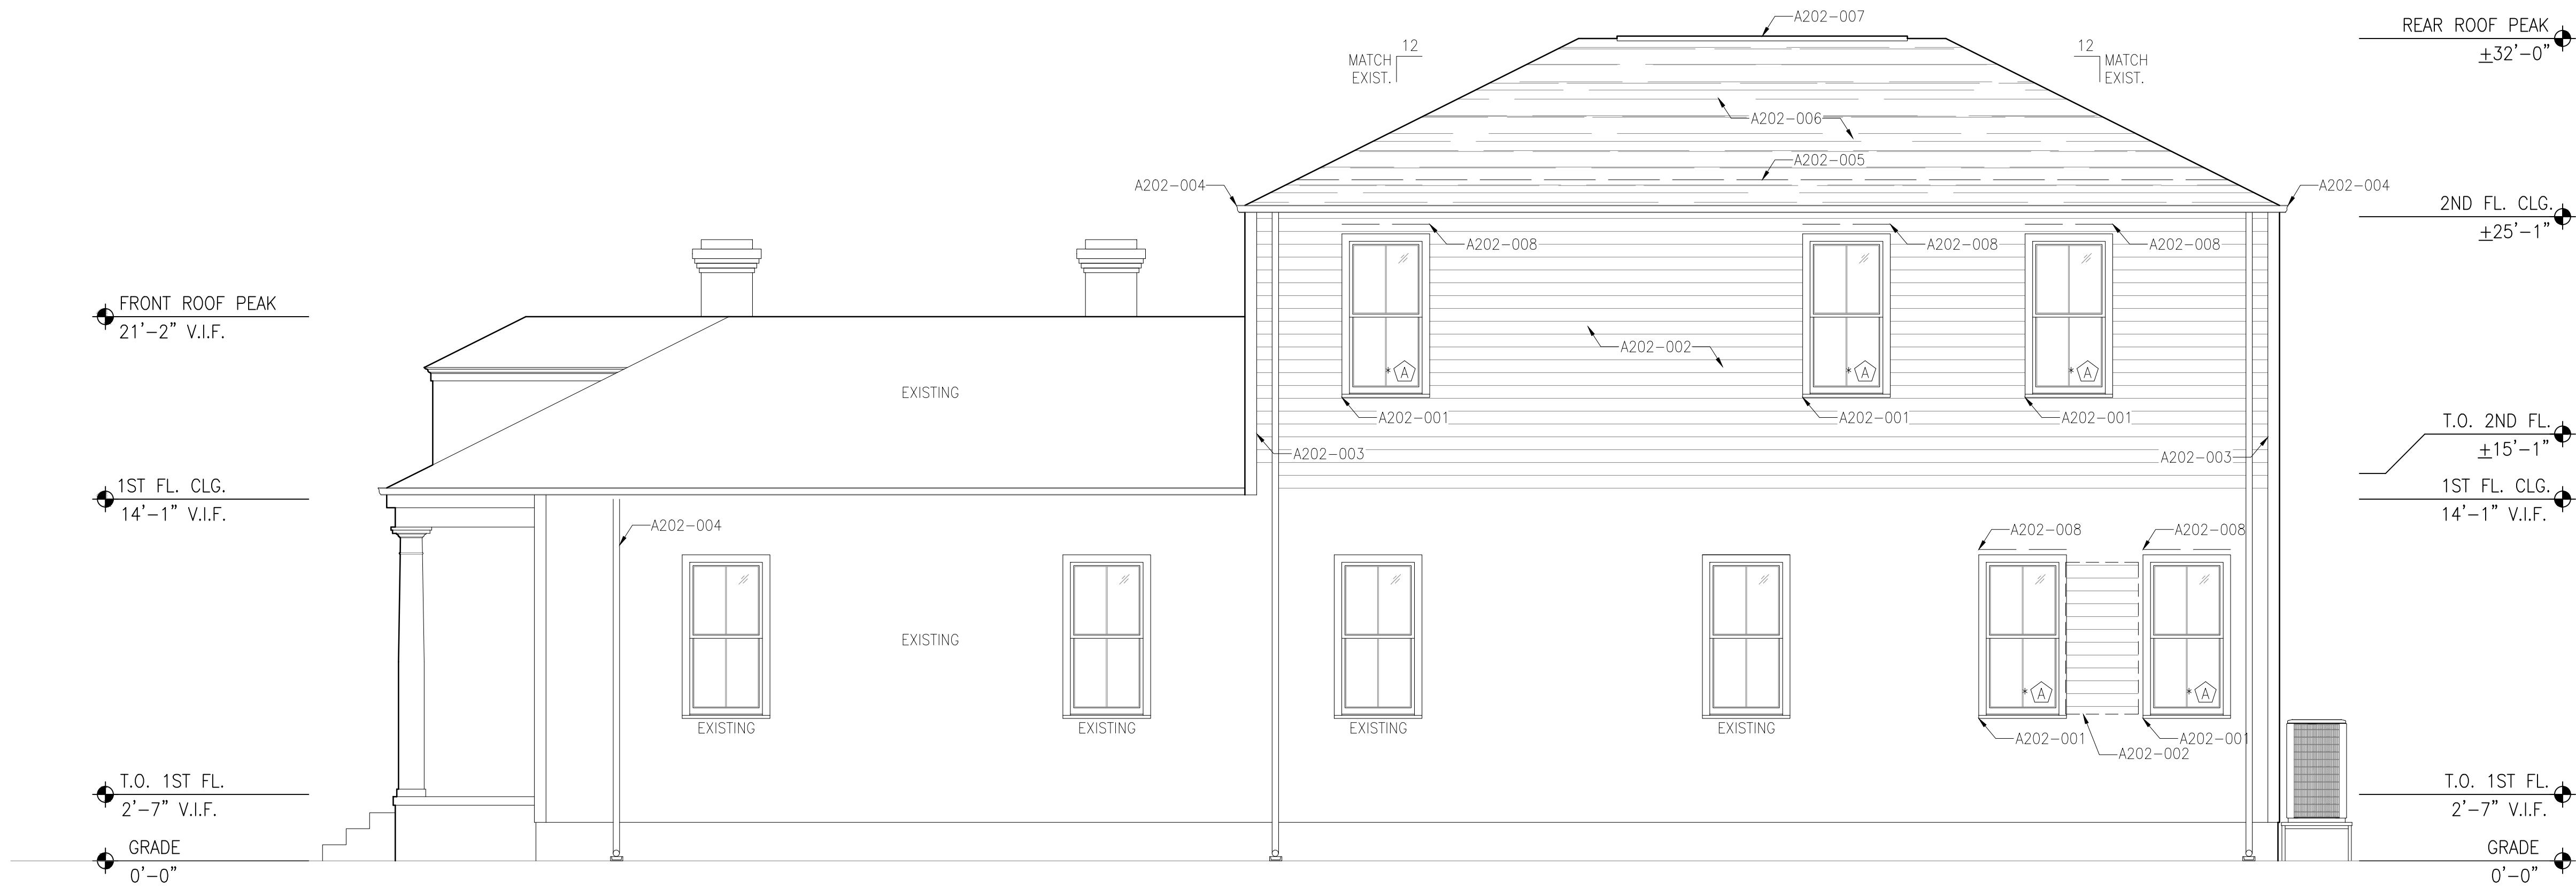


3 PROPOSED SIDE ELEVATION

Scale: 1/4"=1'-0"

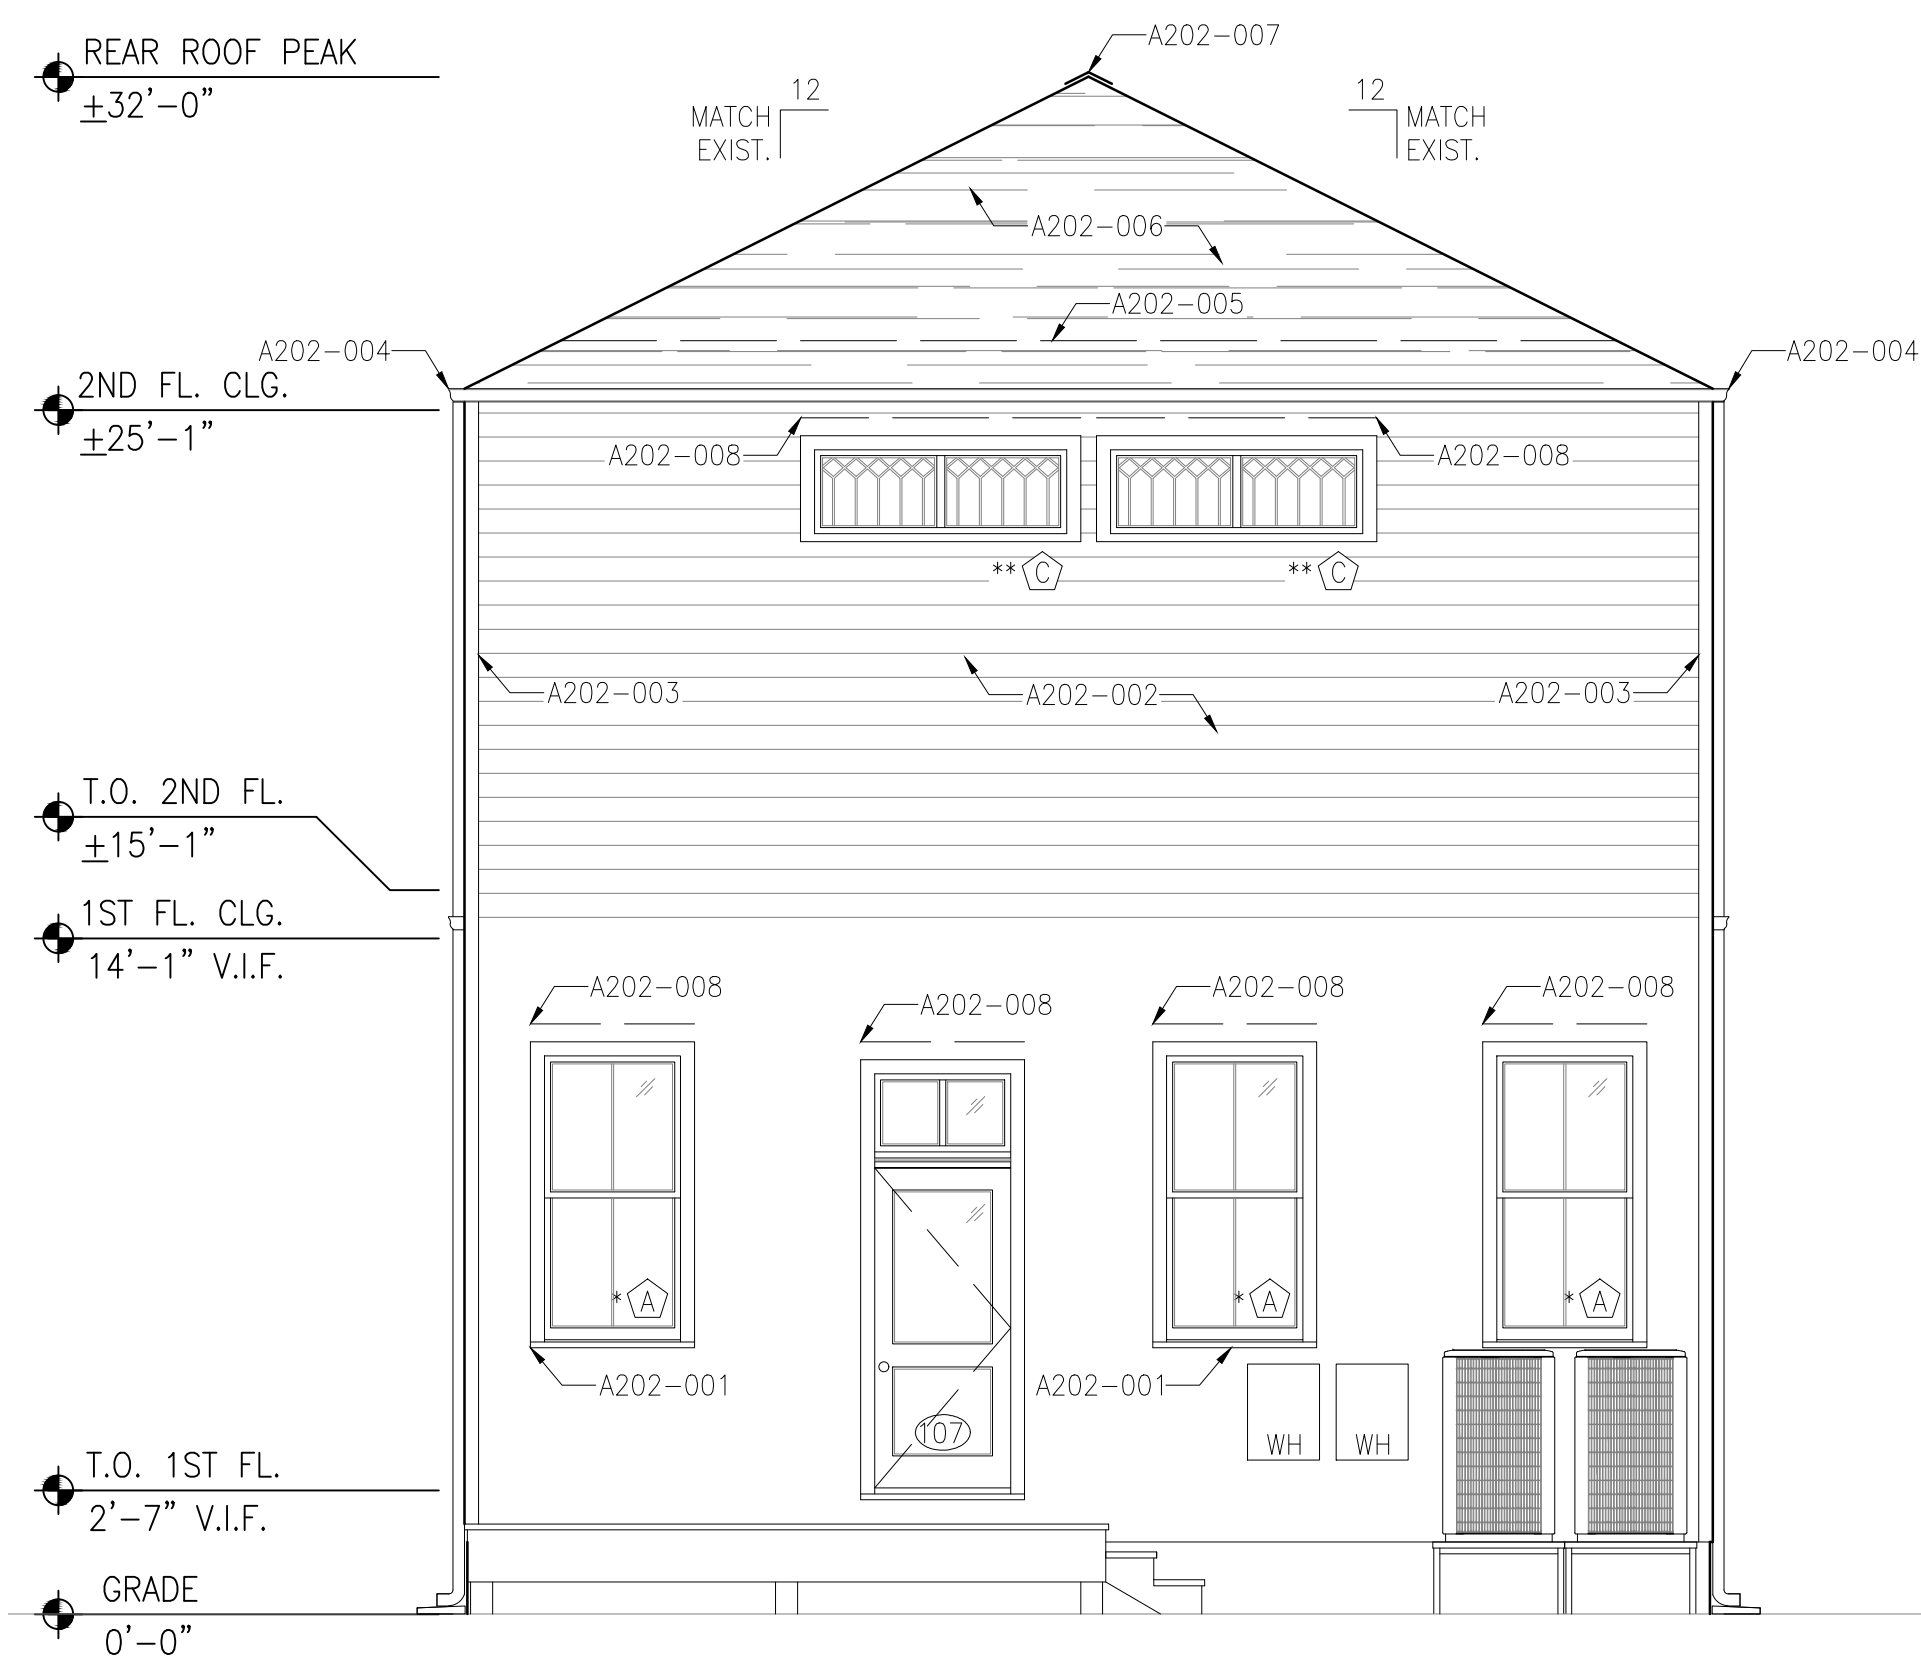

2 PROPOSED REAR ELEVATION

Scale: 1/4"=1'-0"

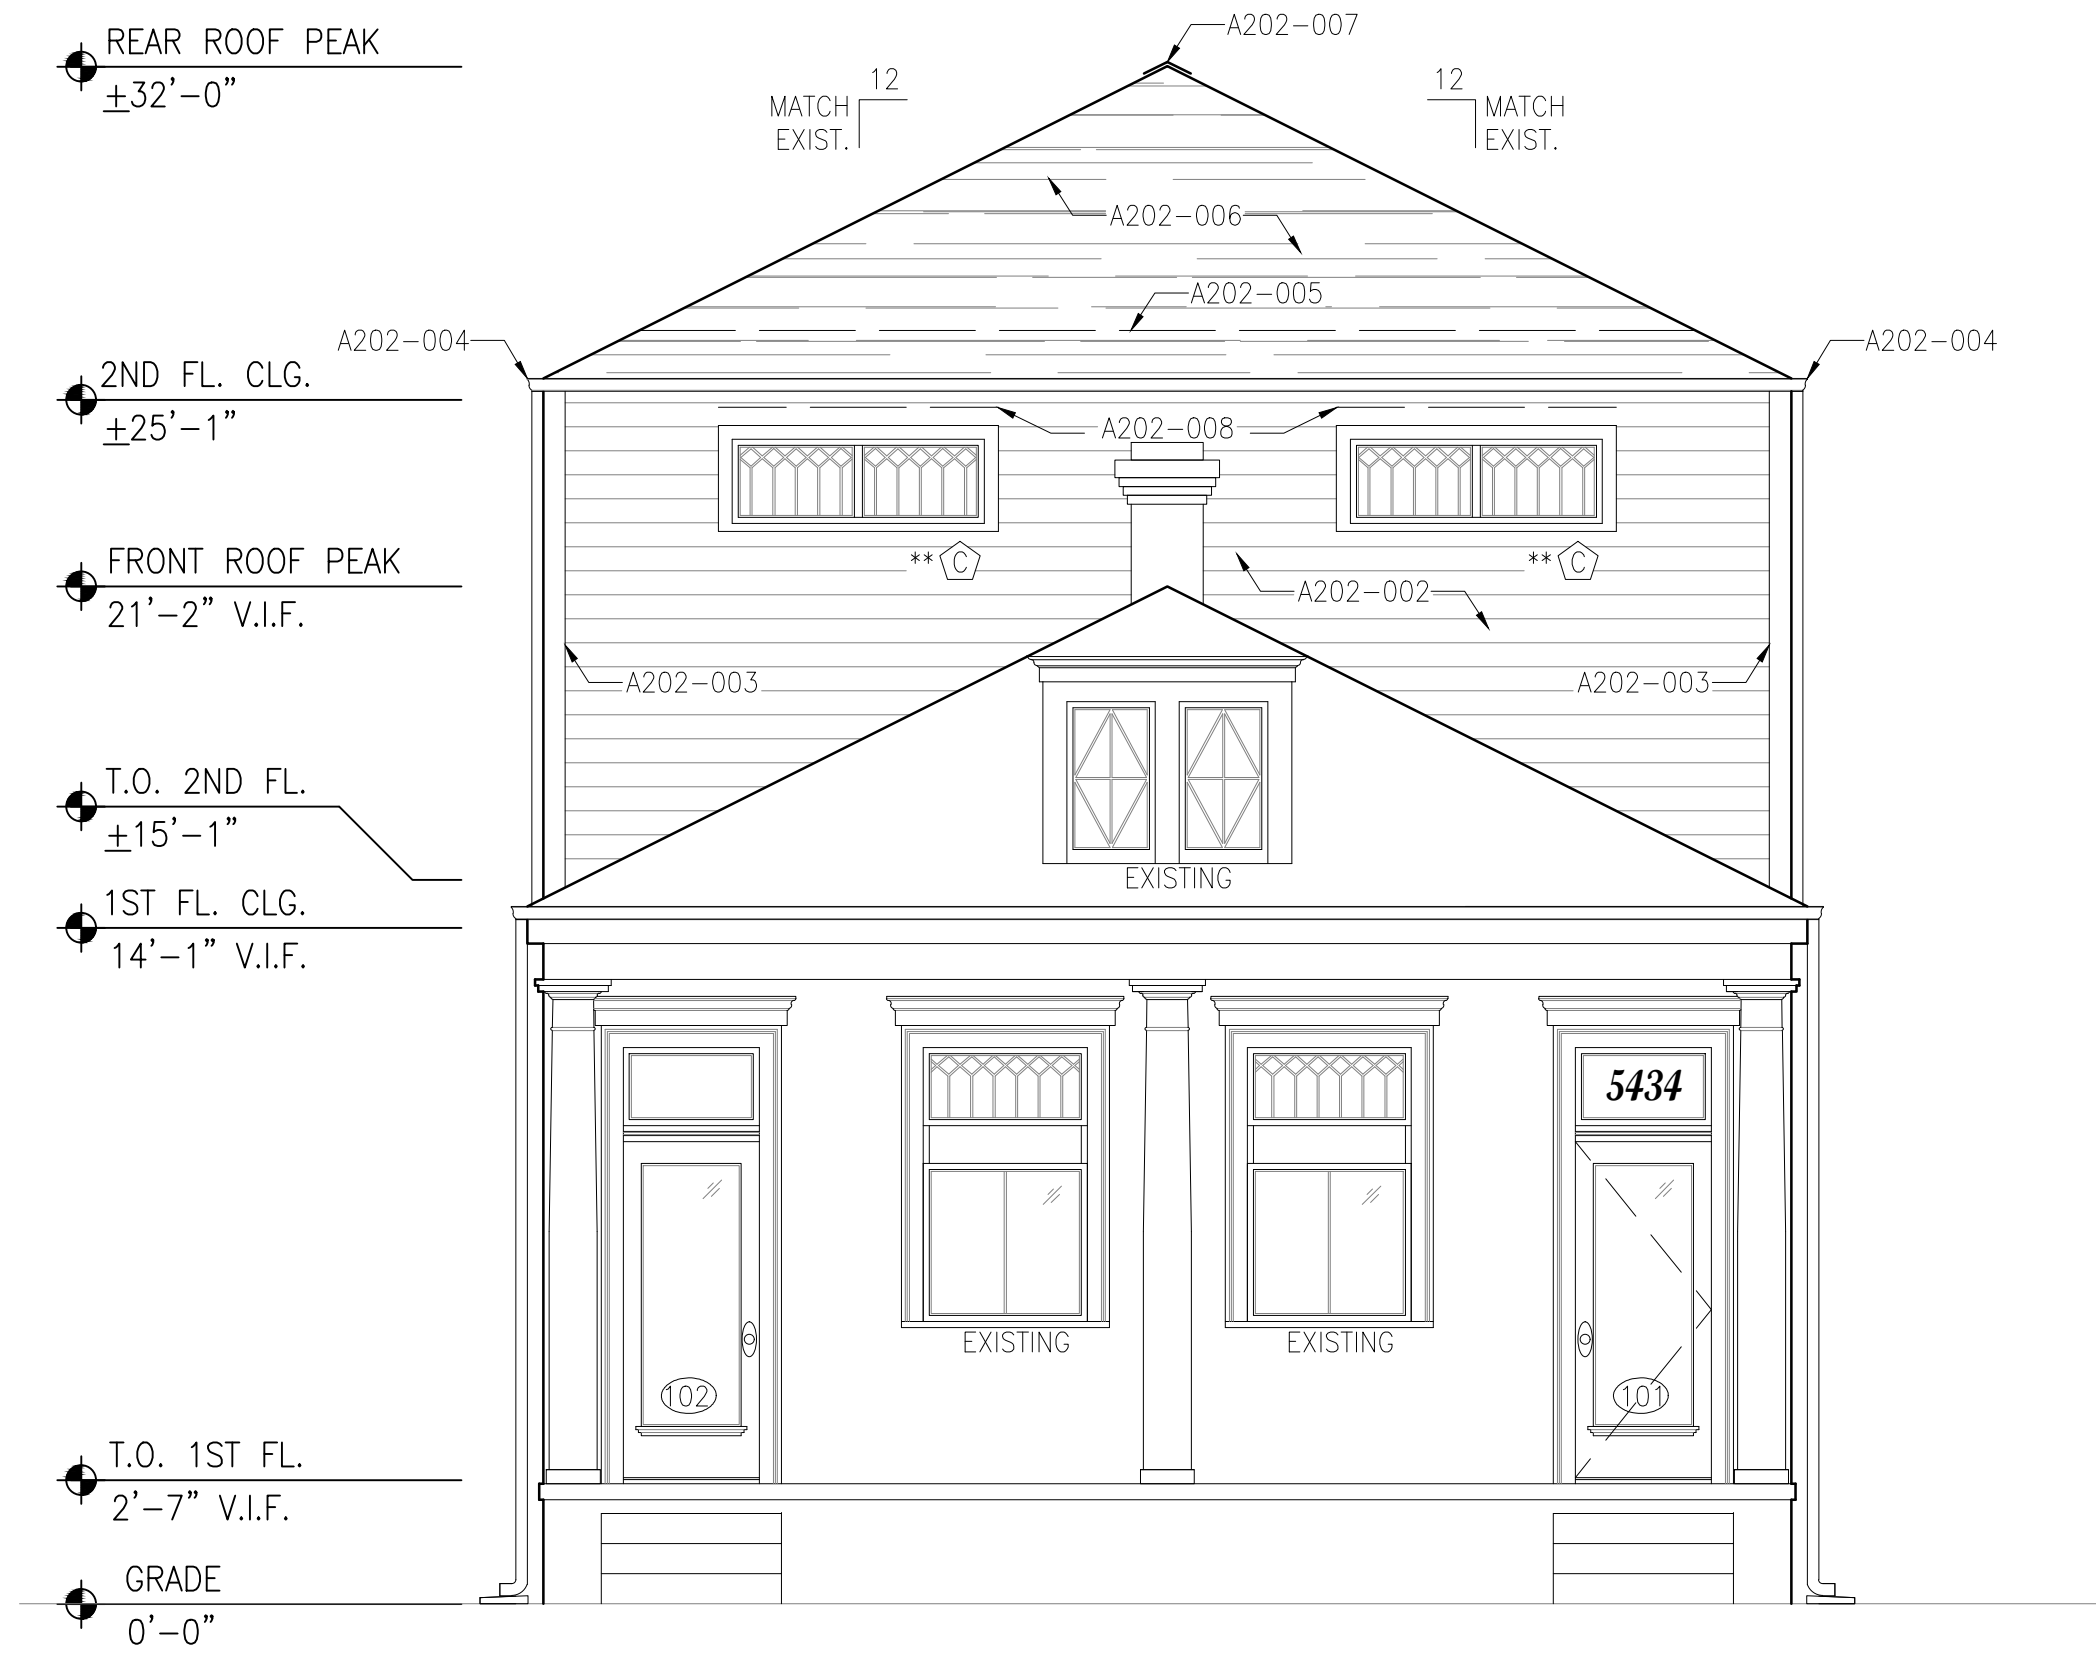

1 PROPOSED FRONT ELEVATION


Scale: 1/4"=1'-0"

NOTE: CONTRACTOR TO HIRE STRUCTURAL ENGINEER TO EXAMINE EXISTING FOUNDATION & DETERMINE IF FOUNDATION WORK IS REQUIRED TO SUPPORT NEW SECOND STORY.

KEY NOTES	
TAG	DESCRIPTION
A202-001	NEW WINDOW TO MATCH EXISTING WOOD SINGLE-PANE 3 WINDOWS.
A202-002	NEW SIDING TO MATCH EXISTING. AT INFILL AREAS, LAP SIDING TO BLEND.
A202-003	CORNER TRIM.
A202-004	GUTTER & DOWNSPOUT.
A202-005	PROVIDE FLASHING 12" UP AT ALL ROOF EDGES.
A202-006	NEW SHINGLES TO MATCH EXISTING.
A202-007	PROVIDE RIDGE VENT AT NEW ROOF.
A202-008	PROVIDE FLASHING 6" ABOVE NEW WINDOWS & DOORS.

DOB STAMP

NO.	REVISIONS/SUBMISSIONS	DATE
	FOR PERMIT	07/29/22
DRAWN BY: KJ		

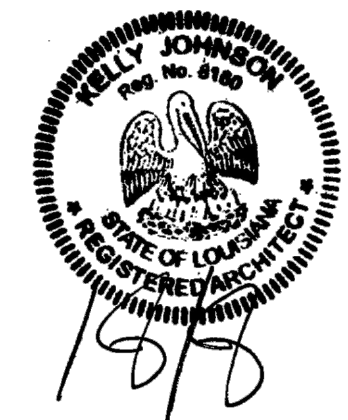

SEAL

ENGINEER

LOCATION:  
**PRIVATE RESIDENCE**  
5434 LAUREL STREET  
NEW ORLEANS, LA 70115

DRAWING TITLE:  
**PROPOSED ELEVATIONS**

PROJECT:  
**22-R-09**

**FOR PERMIT**

**A202**

SHEET

KKJOHNSON ARCHITECTURE & DESIGN  
4618 Camp Street, New Orleans, LA 70115  
p: 504.327.9717 e: kjohnson@kjohnsonarchitecture.com

**KK** JOHNSON  
ARCHITECTURE  
& Design



1. ALL GLAZING TO BE PROTECTED FROM WIND-BORNE DEBRIS BY EITHER PLYWOOD PANELS. CUT TO FIT AND STORED UNDER THE HOUSE, OR SHUTTERS IN ACCORDANCE WITH R301.2.1.2 IRC 2015 ed.
2. ALL OPERABLE WINDOWS & DOORS TO HAVE FULL- SIZE SCREENS. HALF SCREENS ARE NOT ALLOWED.  
PER IRC 2015 ED. EVERY SLEEPING ROOM SHALL HAVE AT LEAST ONE OPERABLE WINDOW OR EXTERIOR DOOR APPROVED FOR EMERGENCY EGRESS OR RESCUE. UNITS MUST BE OPERABLE FROM THE INSIDE TO FULLY CLEAR OPENING WITHOUT THE USE OF SEPARATE TOOLS & SHALL HAVE SILL HEIGHT OF NOT MORE THAN 44" ABOVE THE FLOOR. ALL EGRESS WINDOWS FROM SLEEPING ROOMS MUST HAVE A MINIMUM NET CLEAR OPENING OF 5.7' SQUARE FEET WITH MINIMUM NET CLEAR HEIGHT OF 24" AND MINIMUM NET CLEAR WIDTH OF 20".
3. ANY NEW DOORS TO BE SOLID-CORE WOOD TO MATCH EXISTING. TYPE APPROVED BY OWNER.
4. TYPICAL WINDOW AND DOOR CASING TO MATCH EXISTING & BE WOOD ON EXTERIOR.
5. ALL DOOR THINGS TO MATCH IN FINISH AND STAIN.
6. SHUTTERS (IF ANY) TO BE PAINTED WOOD (EITHER PRESURE TREATED OR SPANISH CEDAR) AND BATTEN, WITH GALVANIZED HARDWARE FOR CLOSING AND FOR STAYING CONNECTED TO THE HOUSE WHEN OPEN.

NOTE: ALL WALL AND CEILING FINISHES TO BE CLASS 1, FLAME SPREAD RATING OF 0 TO 25, SMOKE DEVELOPED 200 OR LESS. ALL FLOOR COVERINGS TO BE CLASS A, CRITICAL RADIANT FLUX OF 0.45 WATTS/SQ. CM. OR HIGHER.

NOTE: MATERIALS/ FINISHES SHOWN IN THIS SCHEDULE ARE GENERAL. OWNER TO SELECT FINAL MATERIALS.

DOOR			FRAMING					
DOOR #	DOOR SIZE(WxH)	DESCRIPTION	FINISH	MATERIAL	HEAD & JAMB	FINISH	HRD.WARE	REMARKS
101	2'-10"x7'-0"	EXIST. SOLID WOOD W. GLASS	WOOD	WOOD	WOOD	EXIST.	KEYED	--
102	2'-10"x7'-0"	EXIST. SOLID WOOD W. GLASS	WOOD	WOOD	WOOD	EXIST.	FIXED	--
103	2'-8"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	PAINT	LEVER	--
104	2'-8"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	PAINT	PRIVACY	--
105	2'-8"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	PAINT	LEVER	--
106	2'-8"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	PAINT	LEVER	--
107	2'-10"x7'-0"	EXIST. SOLID WOOD W. GLASS	WOOD	WOOD	WOOD	PAINT	KEYED	--
108	2'-10"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	PAINT	LEVER	--
109	2'-8"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	PAINT	PRIVACY	--
110	2'-8"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	PAINT	PRIVACY	--
111	(2)2'-6"x6'-8"	WOOD SLIDING DOORS	WOOD	WOOD	WOOD	PAINT	PULLS	--
201	2'-8"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	PAINT	PRIVACY	--
202	2'-6"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	PAINT	LEVER	--
203	2'-8"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	PAINT	PRIVACY	--
204	3'-0"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	PAINT	LEVER	--
205	2'-8"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	PAINT	PRIVACY	--
206	2'-8"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	PAINT	PRIVACY	--
207	2'-6"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	PAINT	LEVER	--
208	2'-6"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	PAINT	PRIVACY	--
209	2'-6"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	PAINT	PRIVACY	--
210	2'-6"x6'-8"	SOLID WOOD DOOR	WOOD	WOOD	WOOD	PAINT	LEVER	--

SHEET

PLAN NOTES

- ALL NEW OUTLETS TO BE GROUND FAULT INTERRUPTED IN ALL WET LOCATIONS.
- OWNER TO PROVIDE ALL NEW LIGHTING FIXTURES EXCEPT CANS. VERIFY TYPES AND LOCATIONS WITH OWNER PRIOR TO WIRING AND INSTALLATION.
- PROVIDE OVERFLOW PANS AT FURNACES & WATER HEATERS W. FLOOR DRAIN. PROVIDE OPEN SITE DRAIN FOR CONDENSATE.
- PROVIDE DISCONNECT FOR DISHWASHER AND AIR CONDENSER.

ELECTRICAL/LIGHTING NOTES

- OWNER TO PROVIDE ALL FIXTURES EXCEPT RECESSED CANS.
- OWNER TO VERIFY LOCATION OF ALL FIXTURES PRIOR TO INSTALLATION.
- ALL PERMITS AND INSPECTIONS TO BE OBTAINED BY ELECTRICIAN AS REQUIRED BY LOCAL CODES AND NEC.
- RECEPTACLES IN WET AREAS (BATHROOMS AND KITCHENS) SHALL BE LOCATED IN ACCORDANCE WITH NEC AND SHALL BE GROUND FAULT CIRCUITED (GFI).
- RECEPTACLES IN BEDROOMS SHALL BE LOCATED IN ACCORDANCE WITH NEC AND SHALL BE ARC-FAULT CIRCUITED (AFI).
- VERIFY SWITCH AND OUTLET LOCATIONS WITH OWNER PRIOR TO INSTALLATION.

MECHANICAL/PLUMBING NOTES

- INSTALL NEW BATHROOM DUCTS FOR VENTILATION. ALL VENTILATION EQUIPMENT SHALL BE INSTALLED IN ACCORDANCE WITH SECTION 1507 OF THE IRC 2015.
- KITCHEN HOODS TO VENT THROUGH ROOF.
- CONDENSING UNITS TO BE LOCATED ON PLATFORM ABOVE BASE FLOOD ELEVATION.
- WHOLE-HOUSE GAS ON DEMAND HOT WATER SYSTEM TO BE INSTALLED IN ATTIC. EQUIPMENT SHALL BE 9.5 RUDD OUTDOOR TANKLESS WATER HEATER OR APPROVED EQUAL.
- ANY PLUMBING PIPES UNDER HOUSE OR OUTSIDE OF CONDITIONED SPACE TO BE INSULATED R-4 MINIMUM.

SYMBOLS KEY

- ⊙

4" RECESSED CAN LIGHT FIXTURE

⊕

W/ DAYLIGHT LED LIGHTS

⊕

DECORATIVE CEILING MOUNT FIXTURE

⊕

DECORATIVE WALL MOUNT FIXTURE

⊕

VENT LIGHT

⊕

LED STRIP

⊕

LIGHT SWITCH

⊕

THREE-WAY LIGHT SWITCH

⊕

SMOKE DETECTOR
- ⊕

OUTLET

⊕

OUTLET, COUNTER HEIGHT

⊕

OUTLET, WET LOCATION

⊕

CEILING FAN

⊕

DISCONNECT

⊕

THERMOSTAT

⊕


HOSE BIB

⊕

CARBON MONOXIDE/ SMOKE DETECTOR


KEYED NOTES

- PROVIDE POWER AND DISCONNECT FOR ALL BATHROOM EXHAUST FANS.
- VERIFY BATHROOM EXHAUST THROUGH ROOF.
- VERIFY WATER HEATER LOCATION WITH PLUMBING CONTRACTOR.
- VENT DRYER THROUGH ROOF.
- PROVIDE OVERFLOW PAN AND F.D. FOR WASHER.
- PROVIDE POWER AND DISCONNECT FOR DISHWASHER.
- NOT USED.
- VERIFY LOCATION AND HEIGHT OF TV CONNECTIONS WITH OWNER.
- VERIFY NEW FURNACE UNIT SIZE AND LOCATION WITH HVAC CONTRACTOR. PROVIDE POWER AND DISCONNECT FOR FURNACE.

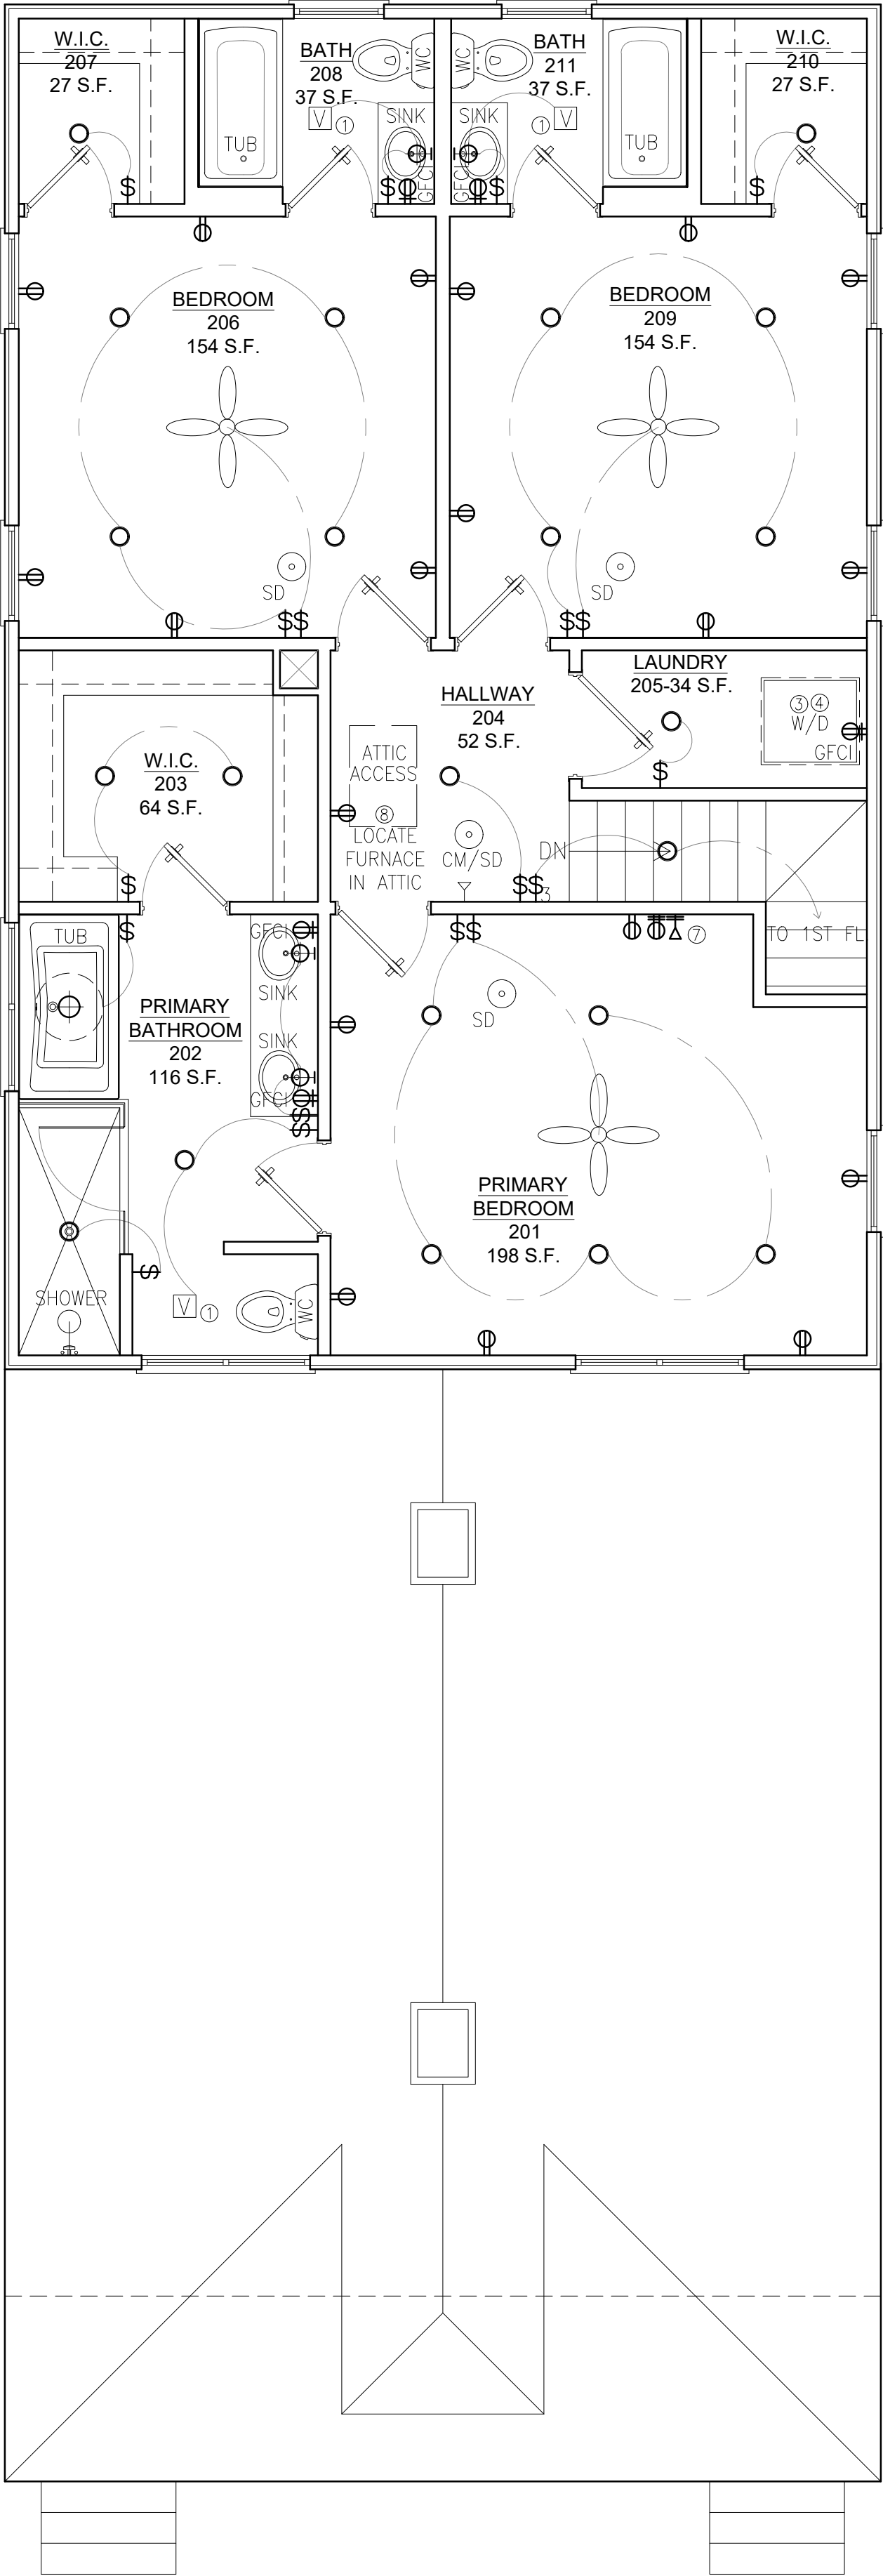

2 PROPOSED 2ND FLOOR PLAN

Scale: 1/4"=1'-0"

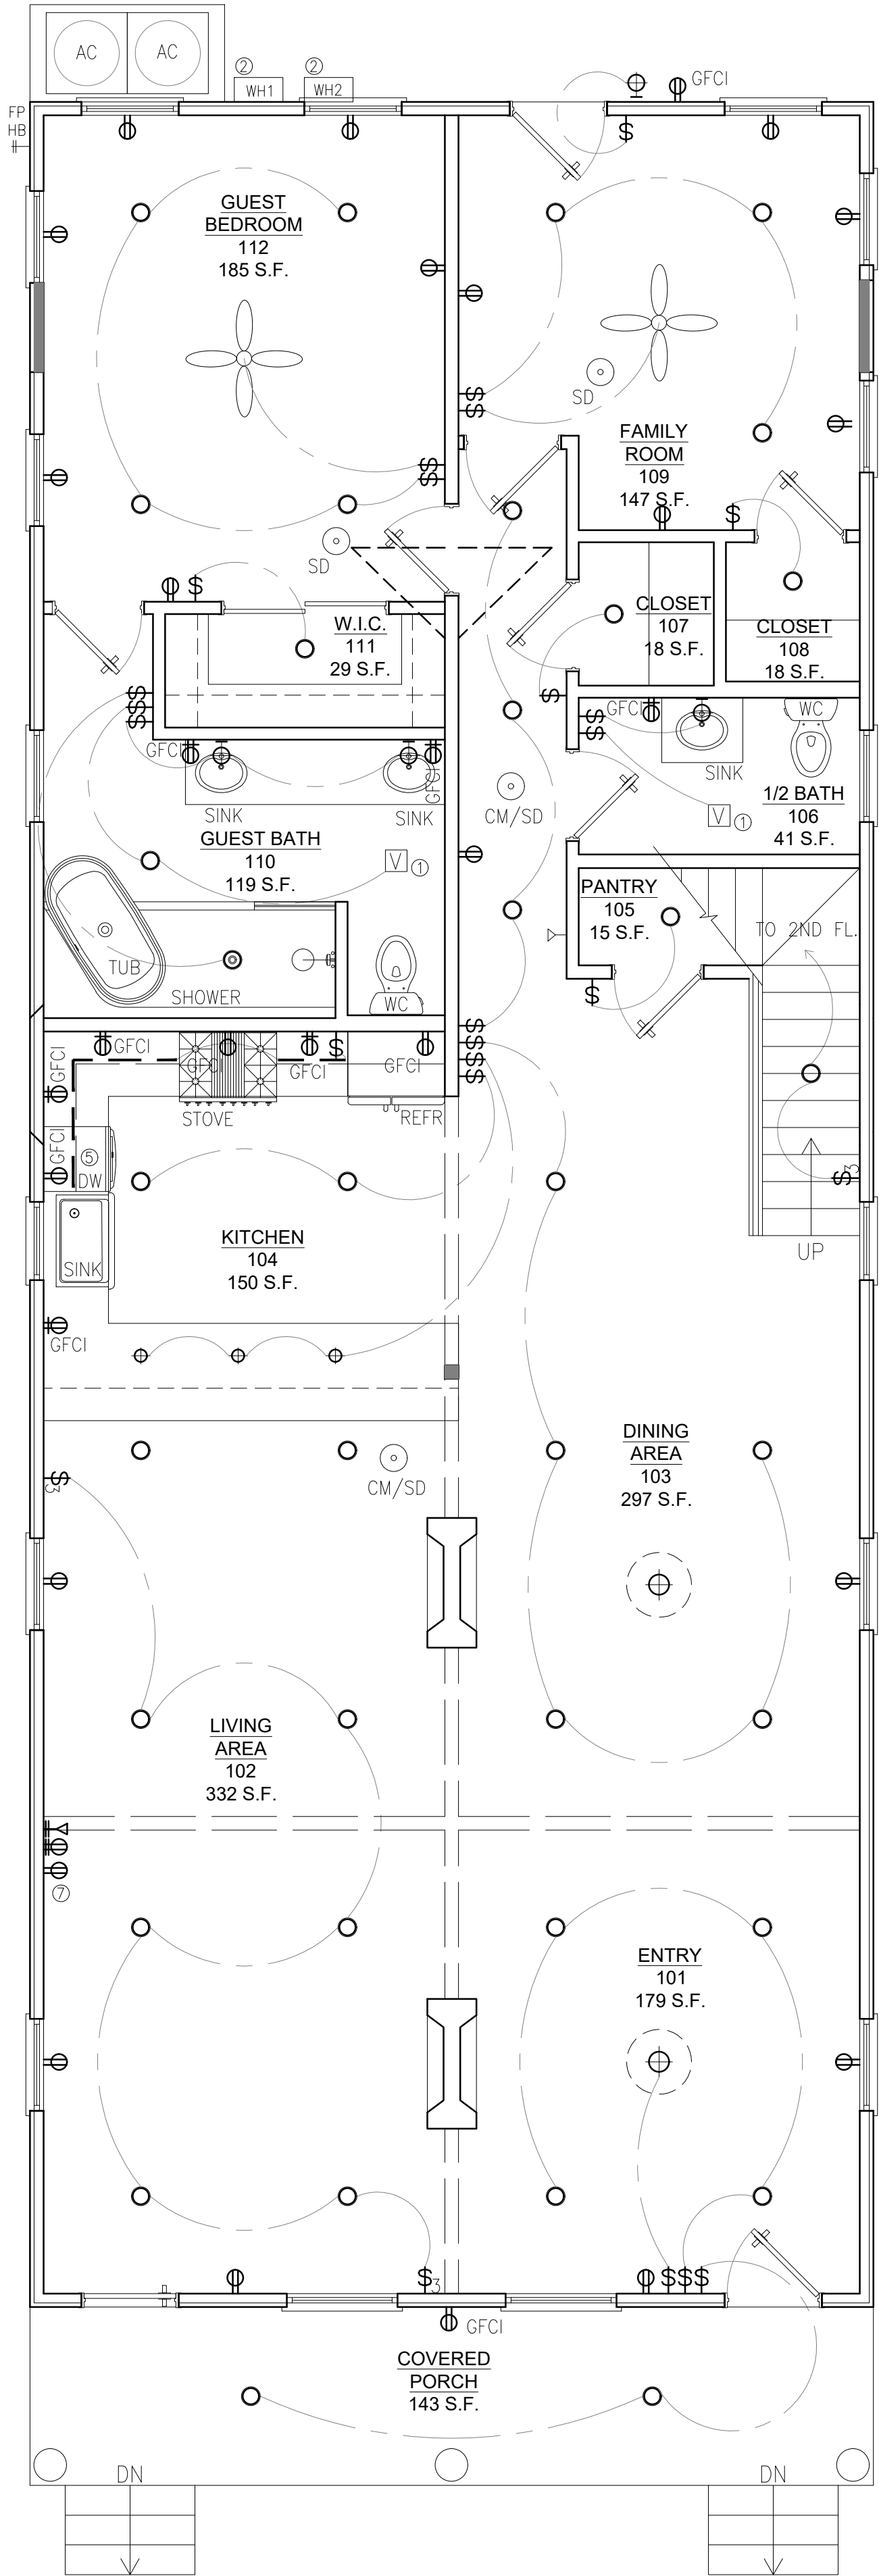

1 PROPOSED 1ST FLOOR PLAN

Scale: 1/4"=1'-0"

NO.

REVISIONS/SUBMISSIONS

DATE

FOR PERMIT

07/29/22

DRAWN BY: KJ

SEAL

ENGINEER

LOCATION:

PRIVATE RESIDENCE

5434 LAUREL STREET

NEW ORLEANS, LA 70115

DRAWING TITLE:

LIGHTING & ELECTRICAL PLAN

PROJECT:

22-R-09

FOR PERMIT

A301

SHEET



DOB STAMP

NO.	REVISIONS/SUBMISSIONS	DATE
	FOR PERMIT	07/29/22

DRAWN BY: KJ



SEAL

ENGINEER

LOCATION:  
PRIVATE RESIDENCE  
5434 LAUREL STREET  
NEW ORLEANS, LA 70115

KKJOHNSON ARCHITECTURE & DESIGN  
4618 Camp Street, New Orleans, LA 70115  
p: 504.327.9717 e: kjohnson@kjohnsonarchitecture.com

DRAWING TITLE:

PLUMBING RISER  
DIAGRAMS

KK | KKJOHNSON  
ARCHITECTURE  
& Design

PROJECT:

22-R-09

FOR PERMIT

A302

SHEET

PLUMBING ABBREVIATIONS


DW	DISHWASHER
ICE	ICE MAKER
LAV	LAVATORY SINK
REFR	REFRIGERATOR
SHWR	SHOWER
SINK	KITCHEN SINK
TUB	TUB/SHOWER
WC	WATER CLOSET
WD	WASHER/DRYER
WH	WATER HEATER
HB	FIRE PROOF HOSE BIB

KEYNOTE LEGEND

A302-B001	CONNECT TO SEWER PIPE.
A302-B002	PROPOSED HOT WATER HEATER; PROVIDE THERMAL TRAP.
A302-B003	RELIEF VALVE.
A302-B004	CONNECT TO EXISTING DOMESTIC WATER SERVICE; CONTRACTOR TO V.I.F.
A302-B005	SHUT-OFF VALVE


APPROVED

maevans , 8/16/2022 ,1:29:21 PM

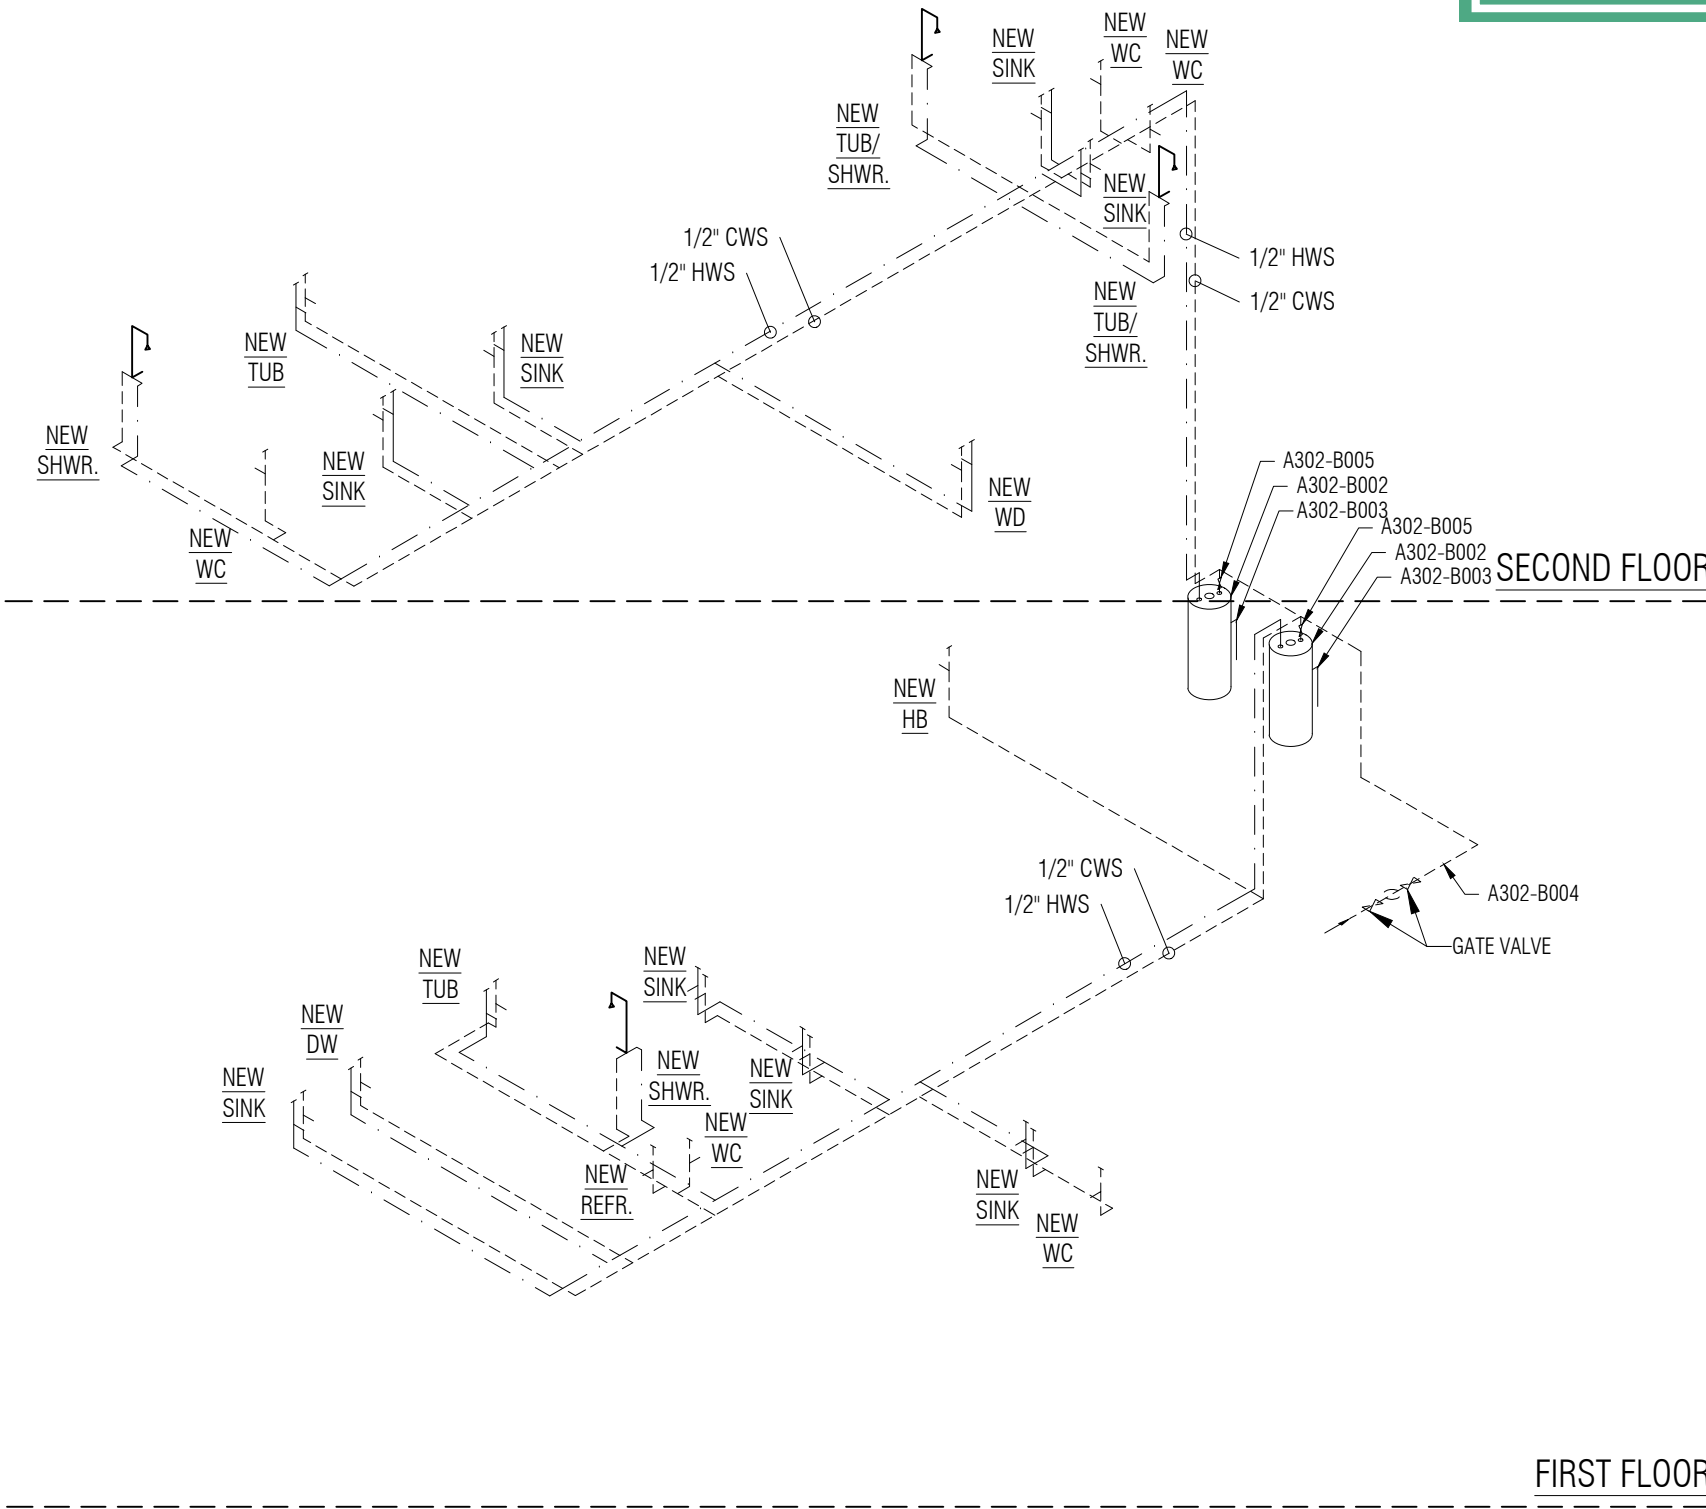

2 SUPPLY PIPE DIAGRAM

NOT TO SCALE

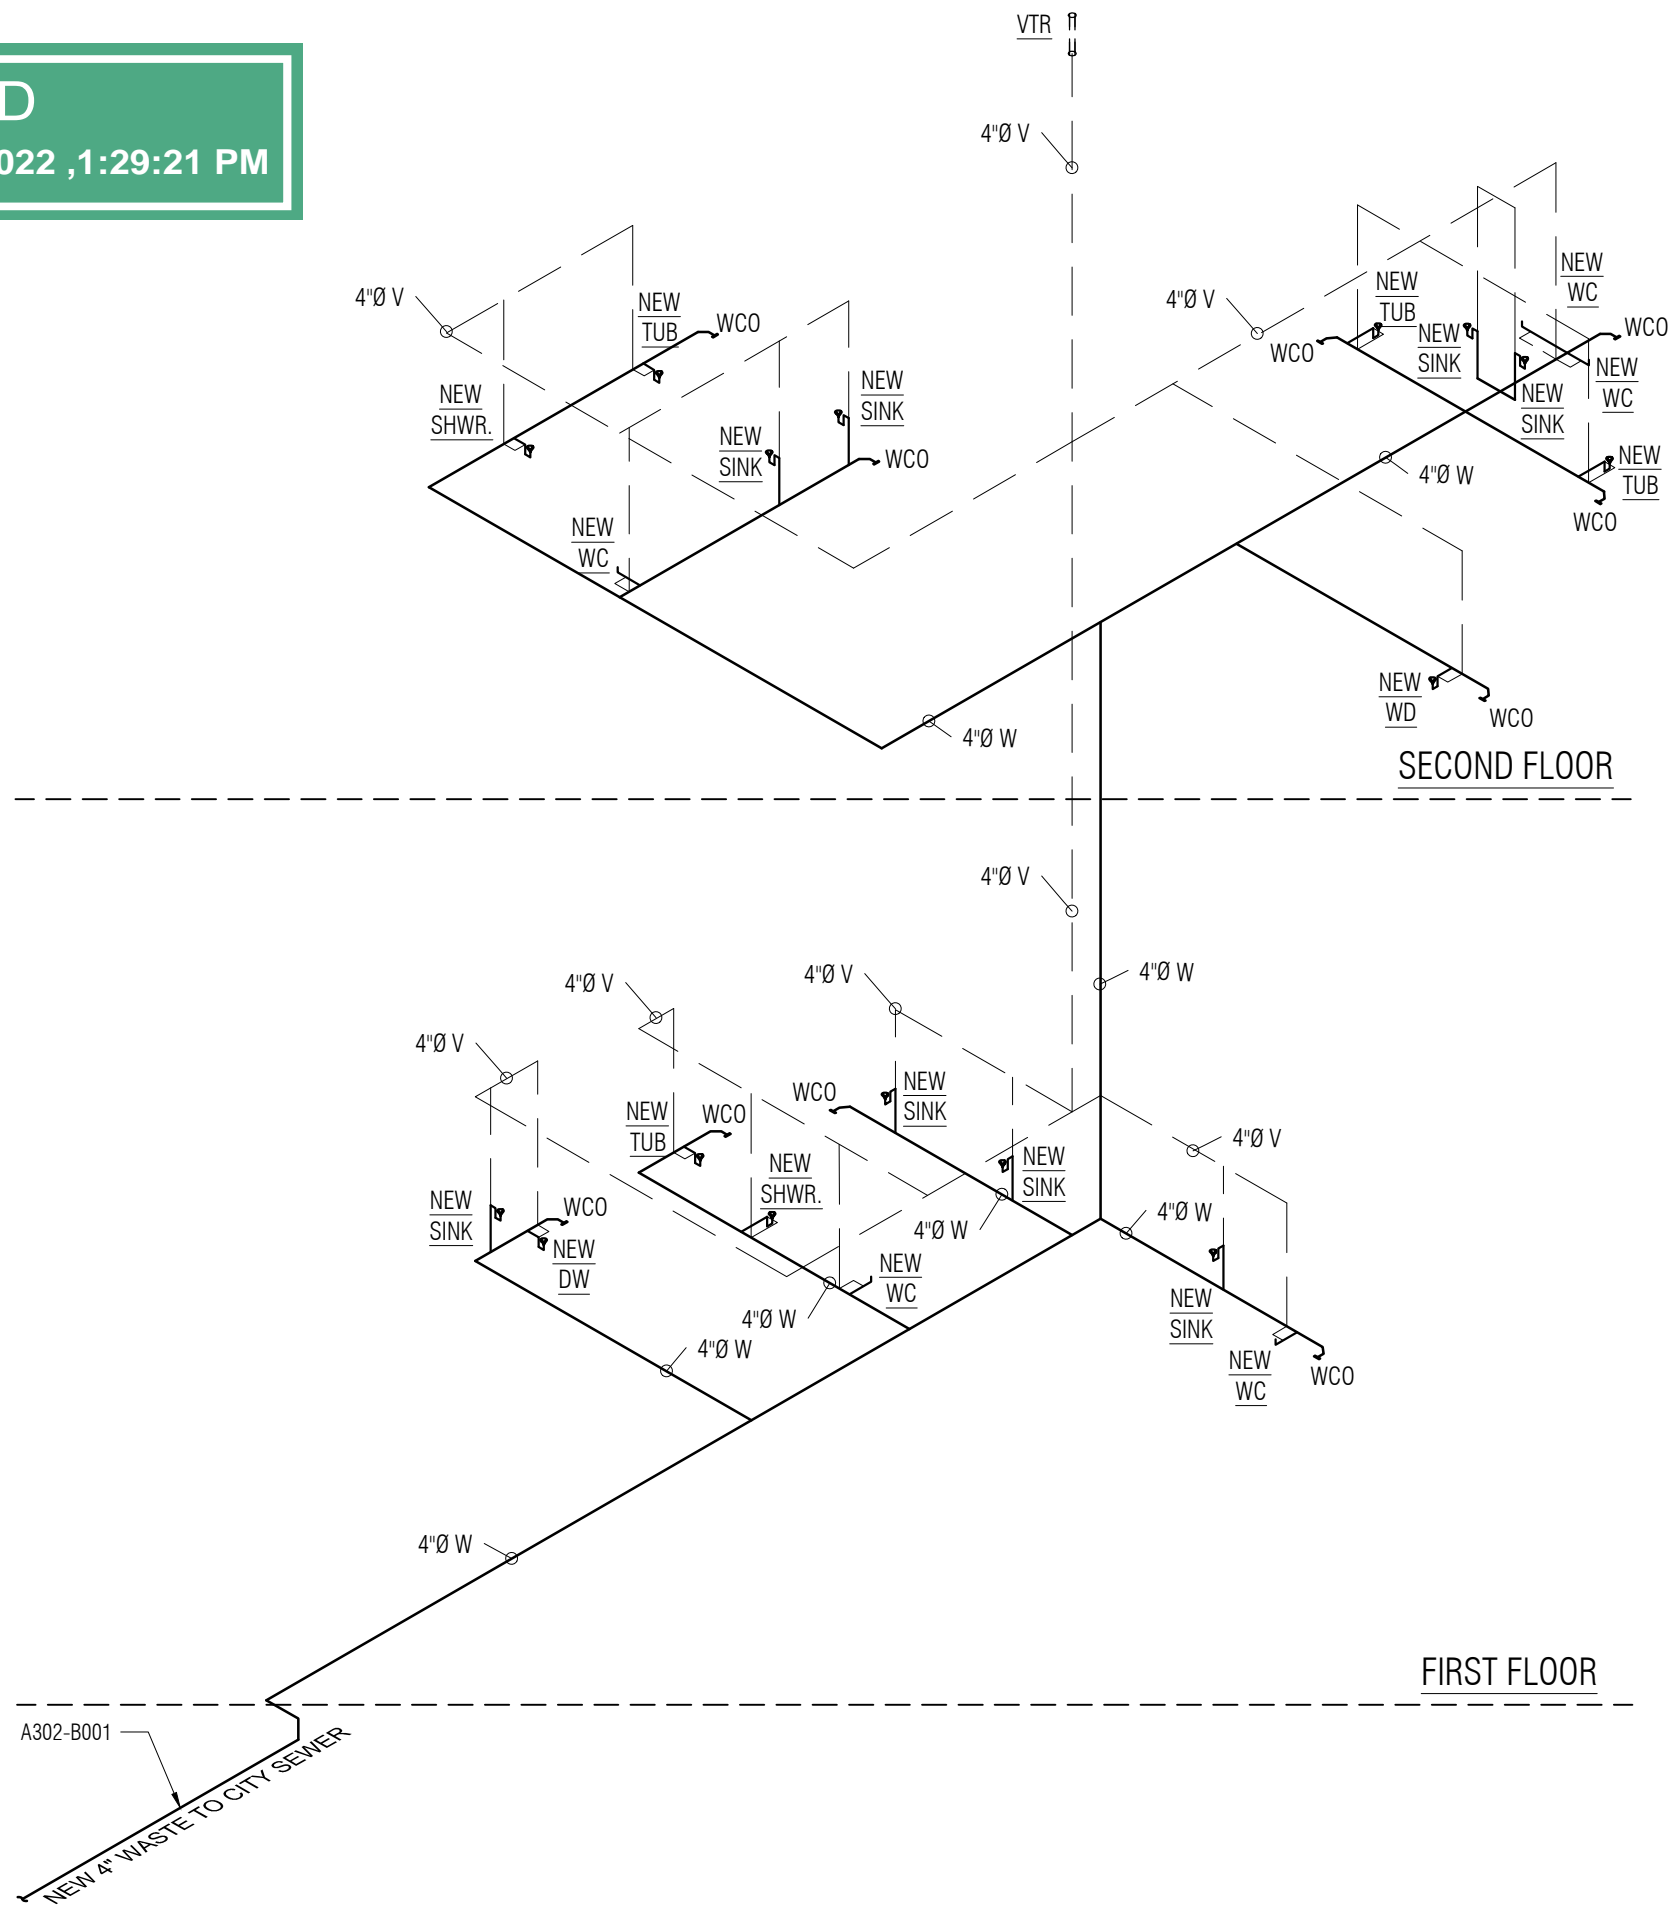

1 WASTE PIPE DIAGRAM

NOT TO SCALE