


Rockfon® Pacific™

0.60
NRC**Features & Benefits**

- Smooth white surface
- Economic solution with basic sound absorption (NRC = 0.60)
- Fire Performance - Class A
- Lightweight panel, easy to carry and install
- Available in square lay-in and tegular

Applications

- Retail
- Utility Space

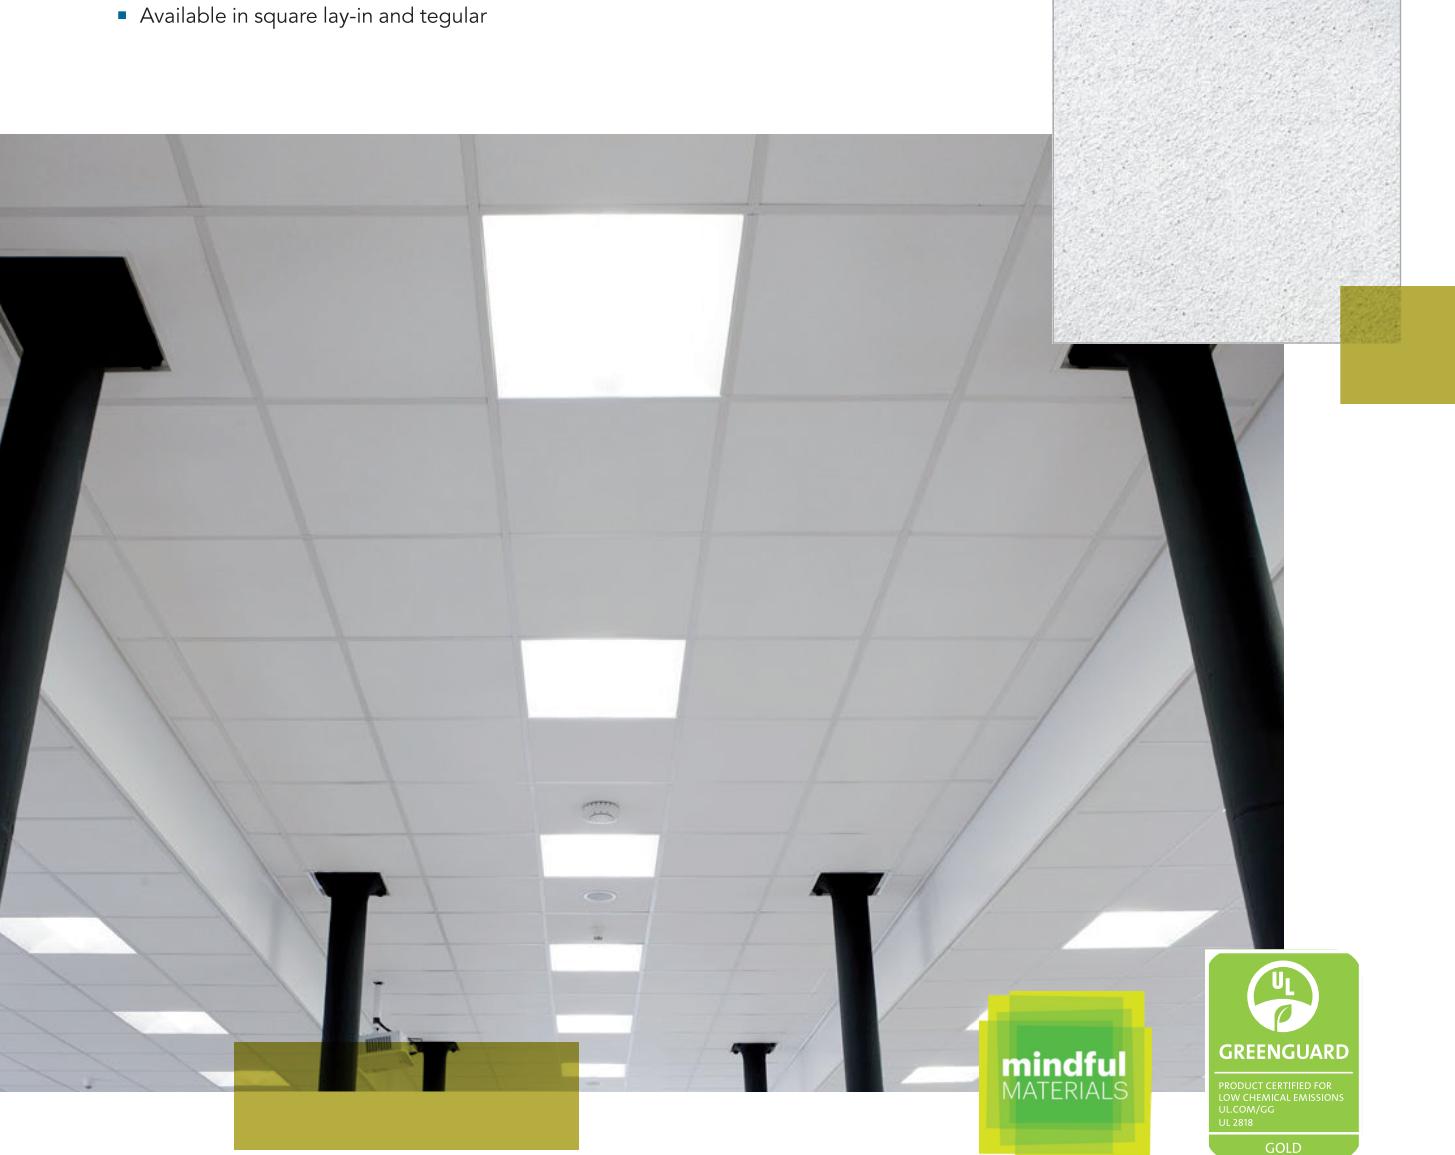

Rockfon ceiling tiles are manufactured using advanced stone wool technology. All stone wool tiles benefit from:

**High Acoustic Absorption****Fire Performance - Class A****Moisture and Sag Resistance****Smooth, Modern Aesthetics**

Materials and Resources (MR)

- Waste Management Planning
- Interior Life Cycle Impact Reduction
- Environmental Product Declarations
- Sourcing of Raw Materials
- Material Ingredients
- Waste Management

Indoor Environmental Quality (EQ)

- Low-Emitting Materials ✓
- ✓ Interior Lighting ✓
- ✓ Acoustic Performance ✓

Recycled Content: 47%



Standard Panels

Edge Designation		Item Number	Modular Size (nominal)	NRC	AC	Fire Class	Light Reflectance	Sag Resistance (relative humidity)	Low VOC	lbs/sqft	sqft/carton	Packaging Information
Square Lay-In	SQ	200	2' x 2' x 1/2"	0.60	-	A	0.85	up to 100%	✓	0.35	128	
	SQ	201	2' x 4' x 1/2"	0.60	-	A	0.85	up to 100%	✓	0.35	128	
Square Tegular Narrow	SLN	220	2' x 2' x 1/2"	0.60	-	A	0.85	up to 100%	✓	0.40	64	
	SLN	221	2' x 4' x 1/2"	0.60	-	A	0.85	up to 100%	✓	0.40	128	
Square Tegular	SL	260	2' x 2' x 1/2"	0.60	-	A	0.85	up to 100%	✓	0.40	64	
	SL	261	2' x 4' x 1/2"	0.60	-	A	0.85	up to 100%	✓	0.40	128	

Recycled content values for our stone wool tiles and panels are based on 2021 production averages of a standard 2'x2' tile, and based on their primary production location.

15/16" Suspension Systems	9/16" Suspension Systems
200, 1200 and Fire Rated systems	4000 and Fire Rated systems
SQ - Square Lay-In SL - Square Tegular 	SQ - Square Lay-In SLN - Square Tegular Narrow 



Rockfon® Pacific™ Properties

Material

Stone wool (Mineral Wool) ceiling tiles with factory applied latex paint on glass scrim surface
ASTM E1264 CLASSIFICATION: Type XX - Stone wool base with membrane-faced overlay, Pattern G



Fire Performance

Surface burning characteristics:
UL723 (ASTM E84) Flame Spread Index: 0
Smoke Developed Index (UL Labeled): 5
CAN/ULC S102 Flame Spread Index: 5
Smoke Developed Index: 0



Sustainability

Many of Rockfon stone wool acoustic solutions are GREENGUARD Gold low VOC certified and meet the State of California's Department of Public Health Services Standard Practice for Specification Section 01350 (California Section 01350) for testing chemical emissions.
Selected potential applications: LEED, WELL, CHPS, Green Globes, BREEAM Int. and CALGreen



Cleaning

Vacuum



Environment

47% recycled content. Recycled content based on U.S. manufacturing.



Warranty

30-Year Limited Product Warranty
See rockfon.com



Thermal Insulation

R Value (BTU Units): 1.8
RSI Value (Watts Units): 0.31



Hygiene

Stone wool provides no sustenance to microorganisms



GREENGUARD Gold Certified
for Office and Educational
Environments



CERTIFIED Environmental
Product Declaration

072022

Rockfon

4849 S. Austin Ave.
Chicago, IL 60638 USA

2022 | Subject to alterations in range and product technology without prior notice. Rockfon accepts no responsibility for printing errors.
© ROCKWOOL International A/S 2018. All rights reserved.
® denotes a trademark that is registered in the United States of America.

Tel. +1-800-323-7164
Fax. +1-800-222-3744
rockfon.com