


NOTE :- "ALL BOS COMPONENTS SHALL BE INSTALLED WITHIN 10 FT OF ADJACENT COMPONENTS

ROOF SECTION(S):

- ① SLOPE - 23
AZIMUTH - 167
MATERIAL - COMP.
SHINGLE
- ② SLOPE - 23
AZIMUTH - 257
MATERIAL - COMP.
SHINGLE

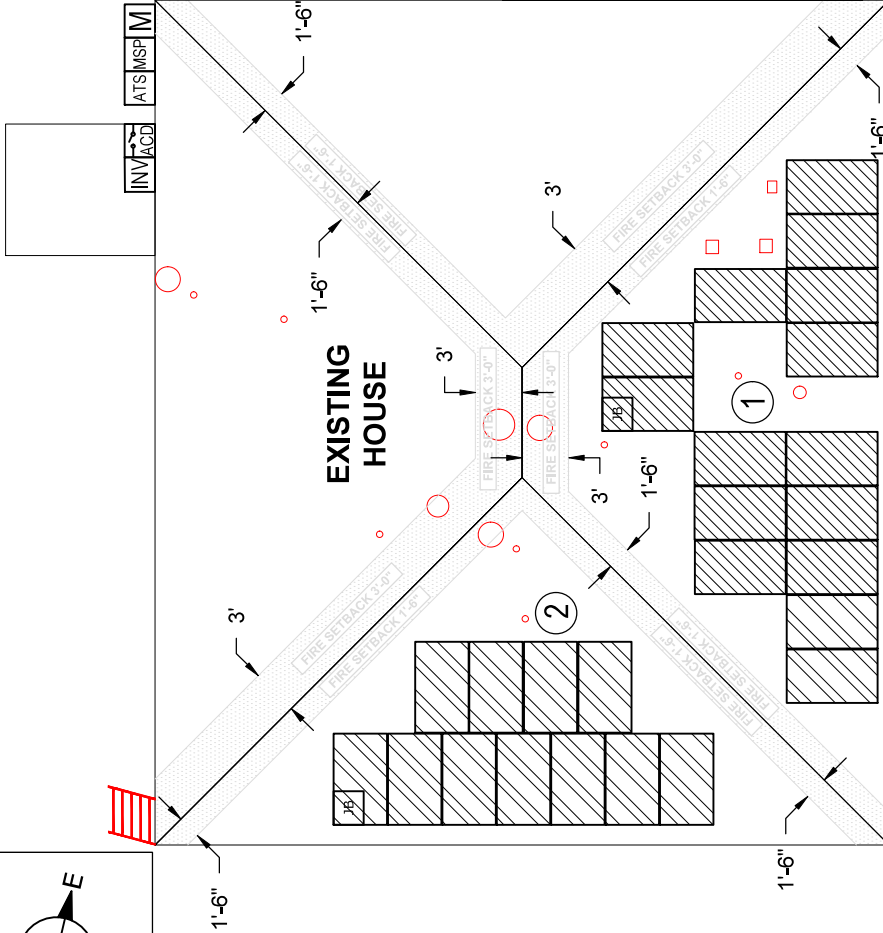

LEGEND

- M** METER
- PVM** PRODUCTION METER
- INV** INVERTER
- ACD** AC DISCONNECT
- MSP** MAIN SERVICE PANEL
- JB** JUNCTION BOX
- OBSTRUCTION
- - -** DRIVEWAY
- SOLAR MODULE
- ▨** STRING #1
13 MODULE
- ▩** STRING #2
13 MODULE
- ▧** FIRE CODE OFFSET

POSiGen DEVELOPER, LLC
819 CENTRAL AVE STE 210
JEFFERSON, LA 70121
LA ELECTRICAL LICENSE :74446

JOB NUMBER: P-004726
UTILITY: ENERGY
RACKING: K2 CROSSRAIL SYSTEM
MODULES: (26)CANADIAN SOLAR CS3N415MS
OPTIMIZER: (26) SOLAREEDGE S440 OPTIMIZER
INVERTER: (1)SOLAREEDGE SE10000H-US

OWNER:
RAJINDER TANWAR,
132 MORRISON CT NEW ORLEANS,
LA 70127
ACCOUNT NUMBER : 59817916

DESCRIPTION:
RAJINDER TANWAR,
RESIDENCE
10.79 KWDC ROOF SOLAR SYSTEM
PRODUCTION : 12,983KWH

DESIGNED BY:
ENERQUAL

REV:
DATE:
9/21/2022

STAMP:
PV-2

PAGE NAME:
SITE PLAN

SCALE:
1/8" = 1'