




Composite of roof plan-view and array layout

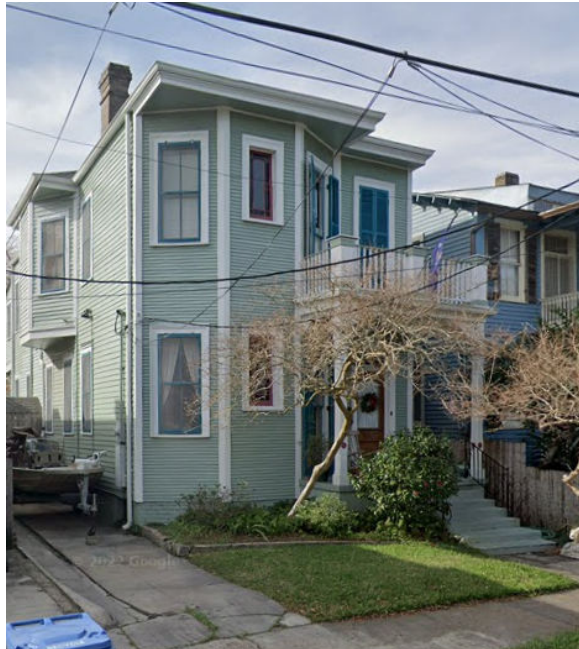

Street View

Ward.DeSoto
Mike Ward
10.73 kW PV System
3128 Desoto St
New Orleans, LA 70119

PROJECT DETAILS

Scope of Work

10.73 kW Enphase Roof Mounted PV System

Interconnection: Line Side Tie |

60A Non-Fused Lockable Knifeblade Solar Disconnect W/ 60A Fuses

1 x Nest Thermostat

1 x LED Retrofit package

Site Conditions

Roof Type: Shingle

Roof Height: 26'

Mounting Planes: 2

Roof Pitch: 30° (7/12)

Roof Azimuth: 110, 290°

Utility: **ENO**

Design Details

Module: 29 x Silfab Solar SIL-370 HC

Inverter: 29 x Enphase Energy Inc. IQ8A-72-2-US

Inverter Limitations: 11/string

Racking: Unirac SM Standard

Attachment: Flashkit Pro Comp Mount

Maximum Attachment Spacing: 72"

